




Screw Terminal Blocks

1000/12

Order Info

reference number (ref. no.)	125212
PU	25
EAN	4028012100026

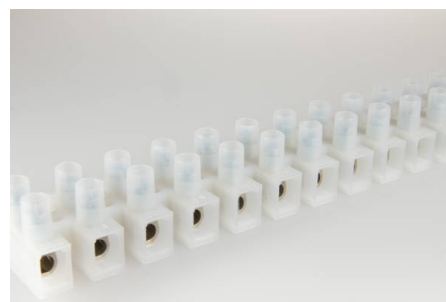

Type

Type	Terminal Block
connection type	screw
number of poles	12 pole
colour	naturalal

Electrical Data

rated voltage	500 V
rated current	41 A

Connection Data

cross-section rating	6.0 mm ²
cross-section rating (UL)	22-10 AWG
clamping range	0.5 - 12.0 mm ²
type of conductor	fine stranded, stranded, solid
stripping length	7.5 - 8.0 mm
fixing	Screw
clamping units per pole	1
contact screw assembly	0.8 x 4.0 / ⌀ 0.8 Nm
socket diameter	4.00 mm
pin spacing	12.0 mm

Ambient Conditions

T _{max} ambient air (at rated current)	85 °C
T _{min} ambient air (operation)	-40 °C

Materials

insulator material	PA
contact material	brass
flammability rating acc. to UL 94	V-2

Approvals

acc. to EN 60998	yes
acc. to UL	yes
acc. to CSA	yes

Accessories

1000 BZ/12	191412
ABK 406/12	193312
ZEL 110	196420