




Screw Terminal Blocks

500/12 35 DS

Order Info

reference number (ref. no.)	123312
PU	50
EAN	4028012100866

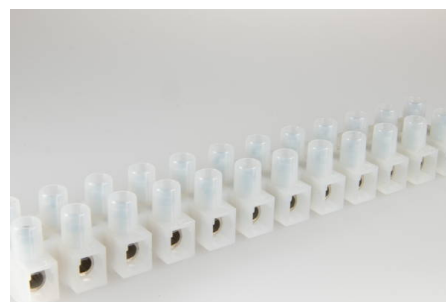

Type

Type	Terminal Block
connection type	screw
number of poles	12 pole
colour	naturalal
wire protection	yes

Electrical Data

rated voltage	450 V
rated current	24 A

Connection Data

cross-section rating	2.5 mm ²
cross-section rating (UL)	22-10 AWG
clamping range	0.5 - 5.5 mm ²
type of conductor	fine stranded, stranded, solid
stripping length	7.0 - 7.5 mm
fixing	Screw
clamping units per pole	1
contact screw assembly	0.8 x 4.0 / ⌀ 0.5 Nm
mounting hole diameter	3.5 mm
socket diameter	2.75 mm
pin spacing	10.0 mm

Ambient Conditions

T _{max} ambient air (at rated current)	85 °C
T _{min} ambient air (operation)	-40 °C

Materials

insulator material	PA
contact material	brass

flammability rating acc. to UL 94	V-2
-----------------------------------	-----

Approvals

acc. to EN 60998	yes
acc. to UL	yes
acc. to CSA	yes

Accessories

500 BZ/12	191312
ABK 405/12	193212
ZEL 110	196420