
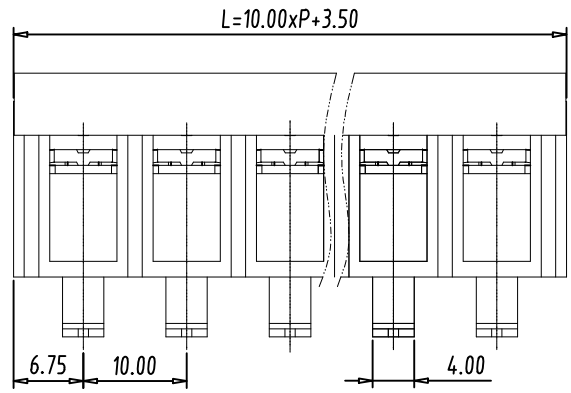
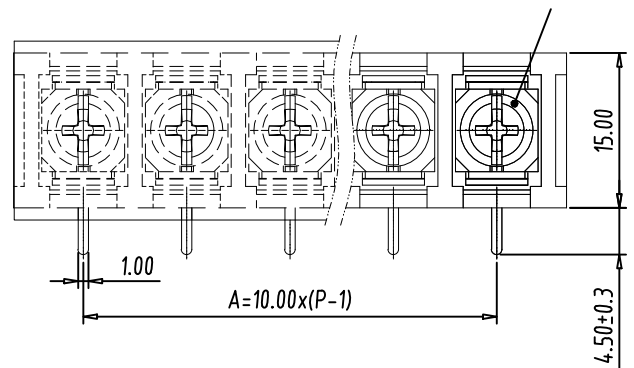


Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for damages. All rights reserved in case of patent, utility model or design patent registrations.

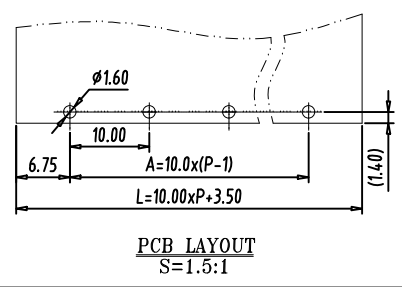


4	SOLDER PIN	P	COPPER ALLOY	TIN PLATED
3	SCREW	P	STEEL	M3.5\NI PLATED
2	HOUSING	1	PA66	UL94-V0
1	COVER	1	PC	UL94-V0
ITEM	NAME OF PART	Q'TY	MATERIAL	NOTE

Total Pitch Tolerances in mm										Nominal dimension range in mm									
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 300	over 320
to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 300	to 320	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 300	to 320
±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.85	±1.00	±1.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	±1.00	±1.20

NOTES:
1. UL:
Rating:300V/20A
Insulation Withstands Voltage:AC2000V/1MIN
Suitable Electric Wire:22AWG~12AWG
Insulation Resistance:500MΩ or more at DC500V
Contact Resistance: ≤5mΩ
2. User Temperature Range:-40℃~+120℃
3. Screw Torque Value:1.0 N·m
4. Strip length:8.5~9.5mm
5. RoHS compliance
Safety approval:

Part No.:
OSTYK605XX230

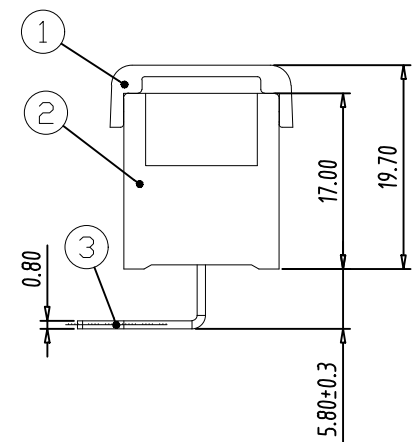

No. of Poles
02 2 Poles
03 3 Poles
... ..
24 24 Poles

REV	SIGN	DESCRIPTION	CHK.	DATE
-----	------	-------------	------	------

DWG.	DATE	2021.03.15	UNITS:	MM	SHEET:	1 OF 1	Tolerance
CHK.	DATE		SCALE:		REV.: A		X. ±0.50
APP.	DATE		TITLE:	Barrier strip 2 wall 10mm With cover			X.X ±0.30
			PART NO.	OSTYK605XX230			X° ±1°
ON-SHORE TECHNOLOGY, INC.			DWG NO.	OSTYK605XX230.dwg			Ⓢ