

G 5/12 - Device terminal block

2716127

<https://www.phoenixcontact.com/us/products/2716127>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device terminal block, nom. voltage: 500 V, nominal current: 32 A, number of connections: 24, number of positions: 12, connection method: Screw connection, Rated cross section: 4 mm², cross section: 0.2 mm² - 4 mm², mounting type: direct screw connection, color: gray

Your advantages

- Touch-proof shock protection

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 2716127 |
| Packing unit | 50 pc |
| Minimum order quantity | 50 pc |
| Sales key | BE12 |
| Product key | BE1265 |
| Catalog page | Page 577 (C-1-2019) |
| GTIN | 4017918061821 |
| Weight per piece (including packing) | 78.626 g |
| Weight per piece (excluding packing) | 78.626 g |
| Customs tariff number | 85369010 |
| Country of origin | TR |

G 5/12 - Device terminal block

2716127

<https://www.phoenixcontact.com/us/products/2716127>



Technical data

Product properties

| | |
|-----------------------|-----------------------------|
| Product type | Feed-through terminal block |
| Number of positions | 12 |
| Number of connections | 24 |
| Number of rows | 1 |
| Potentials | 12 |

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 3 |

Electrical properties

| | |
|---|--------|
| Rated surge voltage | 6 kV |
| Maximum power dissipation for nominal condition | 1.02 W |

Connection data

| | |
|---|---|
| Number of connections per level | 24 |
| Nominal cross section | 4 mm ² |
| Screw thread | M3 |
| Tightening torque | 0.6 ... 0.8 Nm |
| Stripping length | 8 mm |
| Internal cylindrical gage | A3 |
| Connection in acc. with standard | IEC 60947-7-1 |
| Conductor cross section rigid | 0.2 mm ² ... 4 mm ² |
| Cross section AWG | 24 ... 12 (converted acc. to IEC) |
| Conductor cross section flexible | 0.2 mm ² ... 4 mm ² |
| Conductor cross section, flexible [AWG] | 24 ... 12 (converted acc. to IEC) |
| Conductor cross-section flexible (ferrule without plastic sleeve) | 0.25 mm ² ... 4 mm ² |
| Flexible conductor cross section (ferrule with plastic sleeve) | 0.25 mm ² ... 2.5 mm ² |
| 2 conductors with same cross section, solid | 0.2 mm ² ... 1.5 mm ² |
| 2 conductors with same cross section, flexible | 0.2 mm ² ... 1.5 mm ² |
| 2 conductors with same cross section, flexible, with ferrule without plastic sleeve | 0.25 mm ² ... 1.5 mm ² |
| 2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve | 0.5 mm ² ... 1 mm ² |
| Nominal current | 32 A |
| Maximum load current | 32 A (with 4 mm ² conductor cross section) |
| Nominal voltage | 500 V |
| Nominal cross section | 4 mm ² |

Dimensions


G 5/12 - Device terminal block

2716127

<https://www.phoenixcontact.com/us/products/2716127>



Dimensional drawing

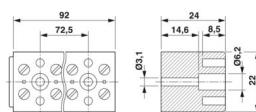

| | |
|---------------|--------|
| Width | 92 mm |
| Height | 22 mm |
| Depth | 24 mm |
| Hole diameter | 3.2 mm |

Material specifications

| | |
|---|-------------|
| Color | gray |
| Flammability rating according to UL 94 | V0 |
| Insulating material group | I |
| Insulating material | PA |
| Static insulating material application in cold | -60 °C |
| Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21)) | 130 °C |
| Relative insulation material temperature index (Elec., UL 746 B) | 130 °C |
| Fire protection for rail vehicles (DIN EN 45545-2) R22 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R23 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R24 | HL 1 - HL 3 |
| Fire protection for rail vehicles (DIN EN 45545-2) R26 | HL 1 - HL 3 |
| Calorimetric heat release NFPA 130 (ASTM E 1354) | 28 MJ/kg |
| Surface flammability NFPA 130 (ASTM E 162) | passed |
| Specific optical density of smoke NFPA 130 (ASTM E 662) | passed |
| Smoke gas toxicity NFPA 130 (SMP 800C) | passed |

Mechanical properties

General

| | |
|-------------------------|--|
| Terminal block mounting | When attaching the product to the mounting surface, please ensure that the housing is not damaged when tightening the center screw |
|-------------------------|--|

Mechanical data

| | |
|-----------------|----|
| Open side panel | No |
|-----------------|----|

Environmental and real-life conditions

Ambient conditions

| | |
|---|--|
| Ambient temperature (operation) | -60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.) |
| Ambient temperature (storage/transport) | -25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C) |
| Ambient temperature (assembly) | -5 °C ... 70 °C |
| Ambient temperature (actuation) | -5 °C ... 70 °C |

G 5/12 - Device terminal block

2716127

<https://www.phoenixcontact.com/us/products/2716127>



| | |
|--|---------------|
| Permissible humidity (operation) | 20 % ... 90 % |
| Permissible humidity (storage/transport) | 30 % ... 70 % |

Standards and regulations

| | |
|----------------------------------|---------------|
| Connection in acc. with standard | IEC 60947-7-1 |
|----------------------------------|---------------|

Mounting

| | |
|-------------------------|--|
| Mounting type | direct screw connection |
| Terminal block mounting | When attaching the product to the mounting surface, please ensure that the housing is not damaged when tightening the center screw |

G 5/12 - Device terminal block


2716127

<https://www.phoenixcontact.com/us/products/2716127>




Drawings

Dimensional drawing

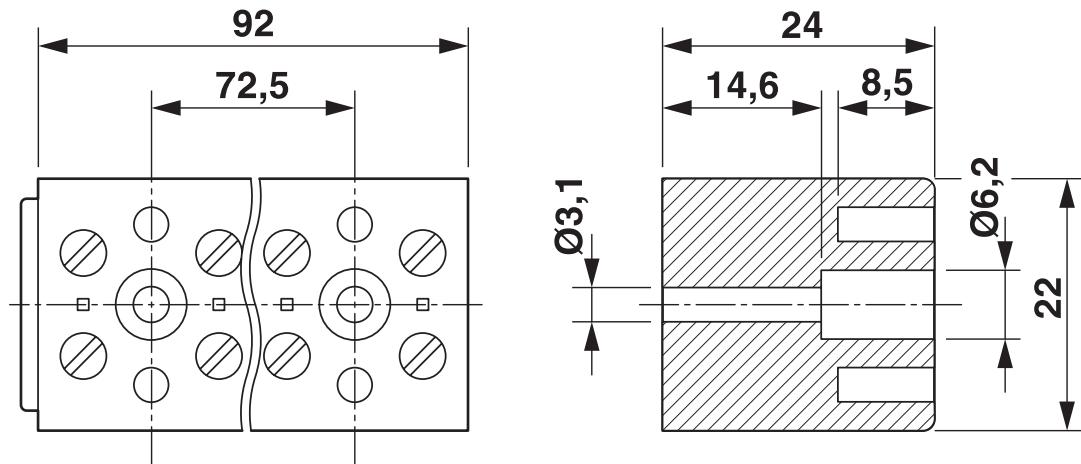

Circuit diagram

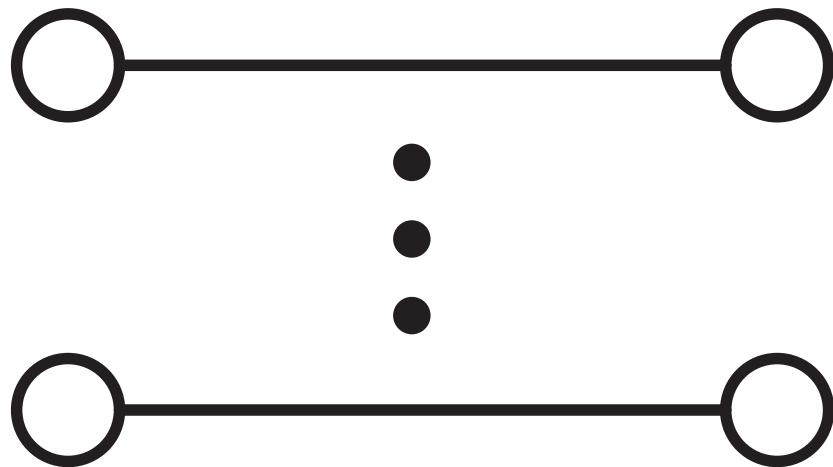

G 5/12 - Device terminal block

2716127

<https://www.phoenixcontact.com/us/products/2716127>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2716127>

| CSA | Approval ID: 13631 | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|-----|--------------------|-----------------------|-----------------------|-------------------|----------------------|
| | | 300 V | 30 A | 26 - 10 | - |

| EAC | Approval ID: RU C-DE.BL08.B.00534 |
|-----|-----------------------------------|
|-----|-----------------------------------|

| cULus Recognized | Approval ID: E60425 | Nominal voltage U_N | Nominal current I_N | Cross section AWG | Cross section mm^2 |
|------------------|---------------------|-----------------------|-----------------------|-------------------|----------------------|
| Use group B | | 300 V | 30 A | 26 - 10 | - |

| NK | Approval ID: 09 ME 142 |
|----|------------------------|
|----|------------------------|

G 5/12 - Device terminal block

2716127

<https://www.phoenixcontact.com/us/products/2716127>



Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27141106 |
| ECLASS-13.0 | 27141106 |
| ECLASS-12.0 | 27141106 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001284 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

G 5/12 - Device terminal block

2716127

<https://www.phoenixcontact.com/us/products/2716127>



Environmental product compliance

EU RoHS

| | |
|---|------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 6(c) |

China RoHS

| | |
|---|---------|
| Environment friendly use period (EFUP) | EFUP-50 |
| An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. | |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | 494e2b00-bfb0-4998-bfe2-68b40316a16a |

G 5/12 - Device terminal block

2716127

<https://www.phoenixcontact.com/us/products/2716127>



Accessories

BN WH - Marker for terminal blocks

1401404

<https://www.phoenixcontact.com/us/products/1401404>



Marker for terminal blocks, Stud, white, unlabeled, can be labeled with: Marker pen, mounting type: plug in, for terminal block width: 4.2 mm, lettering field size: 4 x 4 mm

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com