

Buchanan | Buchanan SSB7

TE Internal #: 1546977-5

Barrier Strips, Dual Barrier, Quick Connect Tab, Wire-to-Wire, 5 Position, 11.1 mm [.438 in] Centerline, 1 Row, Operating Voltage

600 V, Buchanan SSB7

View on TE.com >




Connectors > Terminal Blocks & Strips > Barrier Strips











Barrier Strip Style: Dual Barrier

Bottom Termination Type: Quick Connect Tab

Connector System: Wire-to-Wire

Number of Positions: 5

Centerline (Pitch): 11.1 mm [.438 in]

Features

Product Type Features

Product Type Features	
Block Style	Insulated Turret
Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Levels	1
Number of Positions	5
Number of Rows	1
Electrical Characteristics	
Operating Voltage	600 V
Body Features	
Quick Connect Tab Plating Material	Tin
Primary Product Color	Black

Vertical

Dual Barrier

Product Orientation

Barrier Strip Style



Contact Features

Mating Tab Width	.79 mm[.031 in]
Mating Tab Thickness	6.35 mm[.25 in]
Contact Base Material	Brass
Contact Current Rating (Max)	20 A

Termination Features

Bottom Termination Type Quick Connect Tab	
---	--

Mechanical Attachment

Screw Head Type	Phillips
Screw Plating Material	Zinc Chromate
Screw Material	Steel
Top Termination Type	Binding Combo Head
Mounting Options	End Positions with Mounting Inserts & without End Barriers
Thread Size	6-32
Connector Mounting Type	Panel Mount

Housing Features

Housing Material	Thermoplastic
Centerline (Pitch)	11.1 mm[.438 in]

Dimensions

Product Length	80.95 mm[3.187 in]
Wire Size	.3 - 3 mm²

Usage Conditions

Operating remperature kange -00 - 105 C[-76 - 221 F]	Operating Temperature Range	-60 - 105 °C[-76 - 221 °F]
--	-----------------------------	----------------------------

Operation/Application

Circuit Application	Power	

Industry Standards

UL Flammability Rating	UL 94V-2	

Packaging Features

Packaging Quantity	90
Packaging Method	Package



Product Compliance


For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | Buchanan SSB7

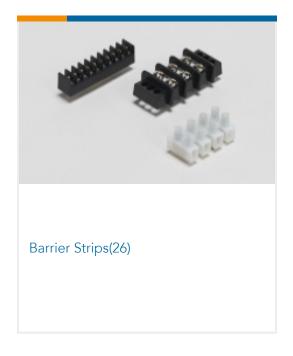

Customers Also Bought





















Documents

Product Drawings

SSB7TG050501=TERM BLOCK ASSY

English

CAD Files

Customer View Model

ENG_CVM_CVM_1546977-5_P.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1546977-5_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1546977-5_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Datasheets & Catalog Pages

Barrier Strips, Dual Barrier, Quick Connect Tab, Wire-to-Wire, 5 Position, 11.1 mm [. 438 in] Centerline, 1 Row, Operating Voltage 600 V, Buchanan SSB7



1-1773458-2_BARRIER_STRIPS_QUICK_REFERENCE_GUIDE

English