
2-1776301-3 - ACTIVE

Europa

TE Internal #: 2-1776301-3 Barrier Strips, Wire-to-Wire, 3 Position, 10 mm [.394 in] Centerline, 1 Row, Operating Voltage 400 V, 22 – 12 AWG Wire Size, .326 – 3.31 mm² Wire Size

View on TE.com >

Connectors > Terminal Blocks & Strips > Barrier Strips

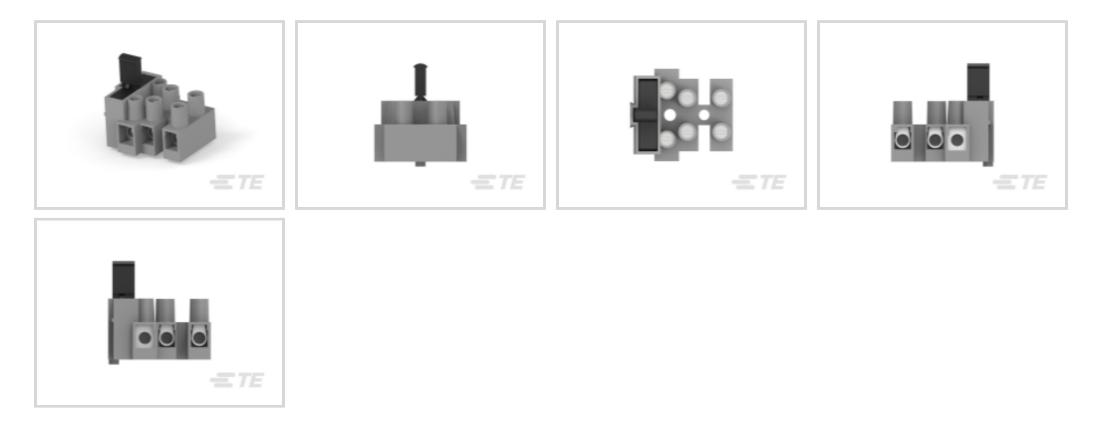

Connector System: Wire-to-Wire

Number of Positions: **3**

Centerline (Pitch): 10 mm [.394 in]

Number of Rows: 1

Operating Voltage: 400 V

Features

E T E connectivity

Product Type Features

Block Style	None				
Connector System	Wire-to-Wire				
Connector & Contact Terminates To	Wire & Cable				
Configuration Features					
Number of Levels	1				
Number of Positions	3				
Number of Rows	1				
Electrical Characteristics					
Operating Voltage	400 V				
Body Features					
Quick Connect Tab Plating Material	Tin				
Primary Product Color	Gray				
Product Orientation	Right Angle				

2-1776301-3

Barrier Strips, Wire-to-Wire, 3 Position, 10 mm [.394 in] Centerline, 1 Row, Operating Voltage 400 V, 22 – 12 AWG Wire Size, .326 – 3.31 mm² Wire Size



Contact Features

Contact Base Material	Brass				
Contact Current Rating (Max)	10 A				
Mechanical Attachment					
Screw Plating Material	Zinc Chromate				
Screw Material	Steel				
Mounting Options	3.1mm Diameter Mounting Holes				
Thread Size	M3				
Connector Mounting Type	Panel Mount				
Housing Features					
Housing Material	Polyamide 6				
Centerline (Pitch)	10 mm[.394 in]				
Dimensions					
Product Length	30 mm				
Wire Size	.326 – 3.31 mm²				
Operation/Application					
Circuit Application	Power				

Industry Standards

UL Flammability Rating	UL 94V-2	
Packaging Features		
Packaging Quantity	200	
Packaging Method	Package	
Product Compliance For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant with Exemptions	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (3% in Component Part)	

Barrier Strips, Wire-to-Wire, 3 Position, 10 mm [.394 in] Centerline, 1 Row, Operating Voltage 400 V, 22 – 12 AWG Wire Size, .326 – 3.31 mm² Wire Size



Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought



2-1776301-3

Barrier Strips, Wire-to-Wire, 3 Position, 10 mm [.394 in] Centerline, 1 Row, Operating Voltage 400 V, 22 – 12 AWG Wire Size, .326 – 3.31 mm² Wire Size



A123462 A123456	TE		
TE Part #5053044060	TE Part #F77529-000	TE Part #ZPF000000000106309	TE Part #ZPF000000000106308
RNF-100-3/16-0-SP	WP-381191-5-9	787-0015-02	787-0015-01



Documents

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_2-1776301-3_O1.3d_igs.zip

English

Customer View Model

ENG_CVM_2-1776301-3_O1.3d_stp.zip

English

Customer View Model

ENG_CVM_2-1776301-3_O1.2d_dxf.zip

English

Customer View Model ENG_CVM_CVM_2-1776301-3_O.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_2-1776301-3_O.3d_stp.zip

English

Customer View Model

ENG_CVM_CVM_2-1776301-3_O.2d_dxf.zip

English

3D PDF

3D

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

BUCHANAN TERMINAL BLOCKS CATALOG - EUROPA TERMINAL BLOCKS

S For support call+1 800 522 6752

2-1776301-3

Barrier Strips, Wire-to-Wire, 3 Position, 10 mm [.394 in] Centerline, 1 Row, Operating Voltage 400 V, 22 – 12 AWG Wire Size, .326 – 3.31 mm² Wire Size



English