

A

A

**NOTE:**

**1.MATERIAL**

- 1.1 Housing:PBT+GF,UL94V-0,Black
- 1.2 Contact:C2680,Au or Tin over Nickel

**2.ELECTRIC**

- 2.1 Contact Resistance:30 Milliohms Max.
- 2.2 Insulation Resistance:1000 Mega Ohms Min.
- 2.3 Dielectric Voltage:500V AC one Sec Level.

3.Operating Temperature:-55°C To +105°C


4.Packing:Tray

Order Code:A-BAT-CH-CA-EG-xTP2

G:Gold Flash  
Z:Tin

B

B

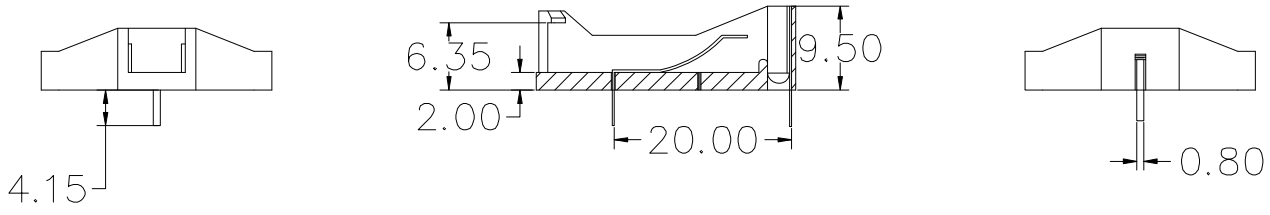


C

C

D

D

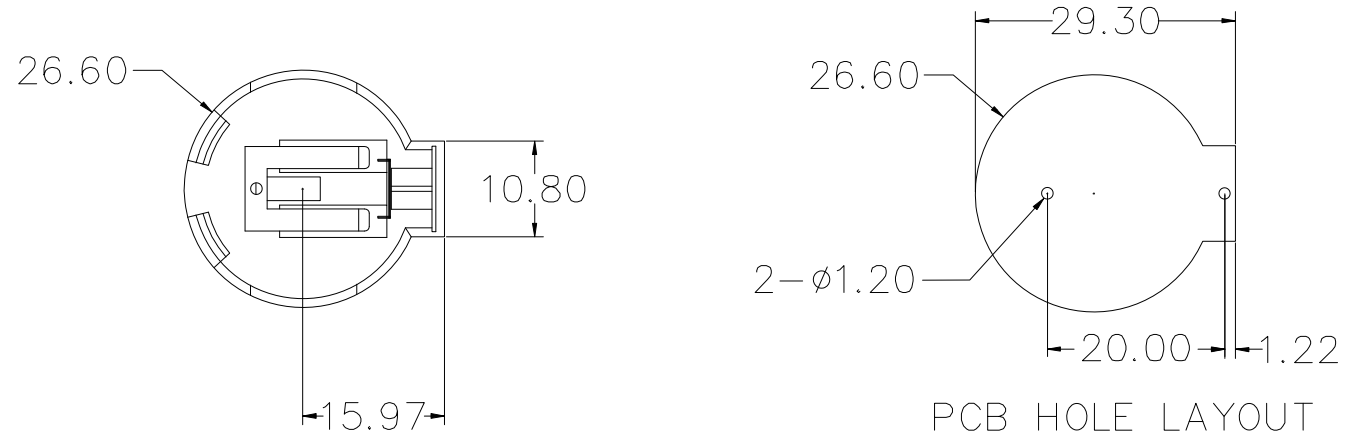

E

E

F

F

G

G

**RoHS compliant**  
unit:mm

Scale	Free
<b>TOLERANCE</b>	
X.	±0.35
.X	±0.25
.XX	±0.20
.XXX	±0.15
DIM	TOL
Angle	TOL

					Date	Name	Description: Coin Cell Holders CR2430 Type
				Drawn	12.20.2021	Peter	
				Approved	12.20.2021	Peter	ASSMANN WSW-NO.
							<b>A-BAT-CH-CA-EG-xTP2</b>
							Drawing-No.
							<b>ASS 9168 CO</b>
							rev00
							Customer-No.
							SHEET 1 / 1



H

H