

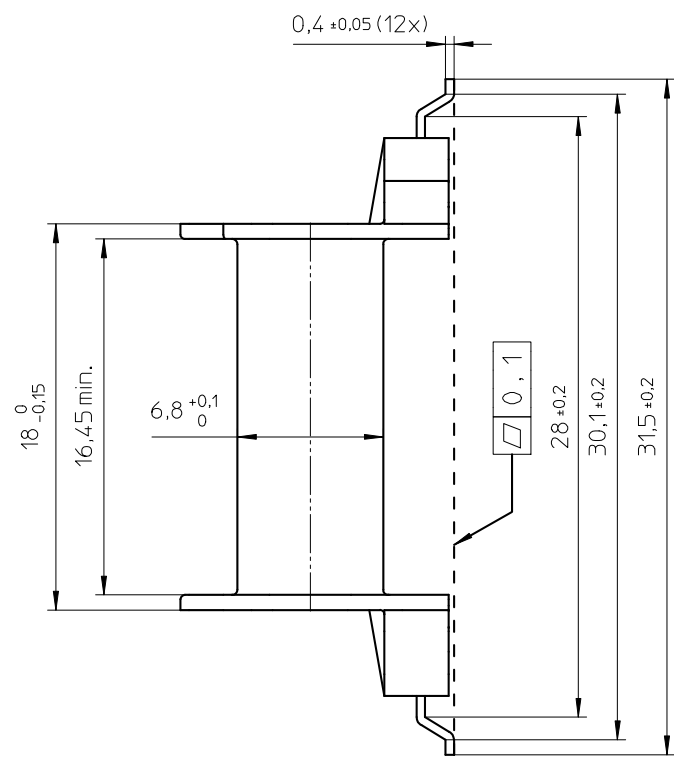
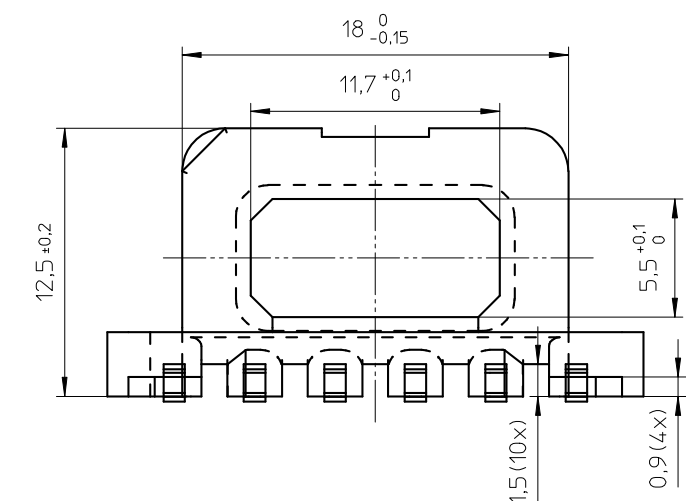


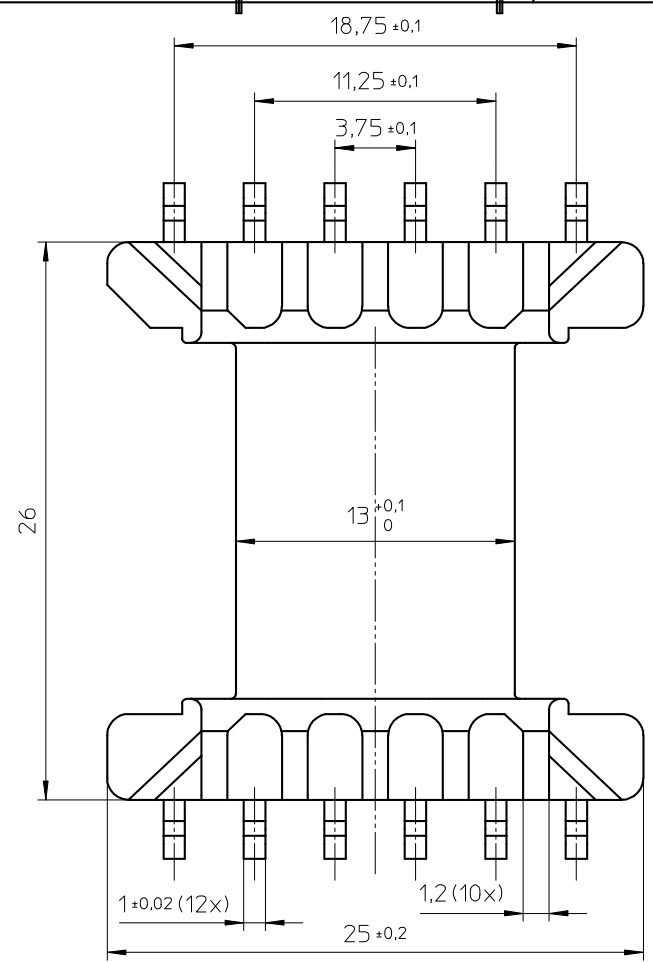

PROPOSED PAD ARRANGEMENT

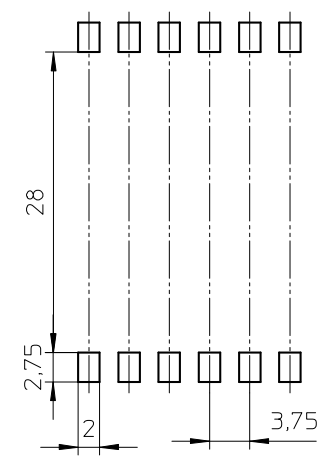

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
 UL file number E41429 - UL94V-0.

Pin material: CuSn, Ni flash, Sn plated (plating finish matte)


Max. operating temp.: acc. to IEC 85 class H, 180°C

Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C-3.5 s.

Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2s.

Min. winding area: 39,0 mm²

Mean length of turn: 46,4 mm.



CLASSNO.		CSHS-EFD25-1S-12P-TZ				4322 021 06811				07-10-19					
										07-11-06					
07-10-19															
NAME NAAM		A.Wojtasz		SUPERS. VERV.		001		SPRSH BL BL		112 - 001		069		A3	
MPA		CHECK CONTR.		DAT.		07-10-19		Property of Eigendom van		© FERROXCUBE 2007					