


Fits Packaging Tray
TY85x116-C



+/- .010 Inches
(mm), Actual Size

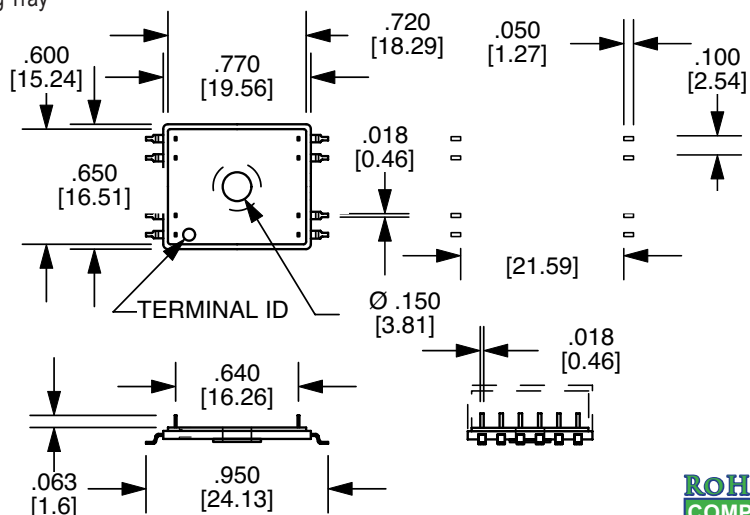

STM582-8

Material: DAP4 (Black)
UL Rating: UL94-VO, Class F
8 Terminals: Phosphorus Bronze
 100% Tin Plate
Solderability: MIL-STD-202
 Method 208

Package Tray: TY85X116-A (50tray)
 See RoHS compliant PET packaging trays
 options on page 47.

Application: For surface mounting
 of components, pot cores and wound
 toroids up to .580 inches in diameter.
 Potting cup PC581 may be used to
 encapsulate the component. (Page 18)
 Made in our China Factory