

G-INS-PG13,5-M68N-PNES-LG - Cable gland



1424488

<https://www.phoenixcontact.com/us/products/1424488>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Cable gland, material for screw connection: PA, external cable diameter 6 mm ... 12 mm, shielding: no, connecting thread: Pg13.5, color: lightgrey RAL 7035

Your advantages

- Plastic material conforms to UL 746C f1

Commercial data

Item number	1424488
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	BF68
Product key	BF7DCX
Catalog page	Page 687 (C-2-2019)
GTIN	4055626373188
Weight per piece (including packing)	10.9 g
Weight per piece (excluding packing)	10.9 g
Customs tariff number	39269097
Country of origin	TR

G-INS-PG13,5-M68N-PNES-LG - Cable gland



1424488


<https://www.phoenixcontact.com/us/products/1424488>

Technical data

Product properties

Product type	Cable screw gland
No. of conductors	1
Manufacturer	BIMED
Manufacturer Designation	BS-14
Shielded	no

Dimensions

Dimensional drawing	
Length	40 mm
Length of the connecting thread	10 mm
Hole diameter	20.5 mm ... 20.7 mm
Wrench size, union nut	24 mm
Wrench size, support	24 mm
Hexagon angular dimension	27.8 mm
Thread type connection side	Pg13.5

Material specifications

Color	light grey (RAL 7035)
Flammability rating according to UL 94	V2
Seal material Cable seal	CR
Material for screw connection	PA

Cable/line

External cable diameter (Cable 1)	6 mm ... 12 mm
External cable diameter ()	6 mm ... 12 mm (for UL 514 B)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP66
	IP68 (5 bar / 0.5 h)
Enclosure rating (NEMA)	1
	4
	4X
	12
	13

G-INS-PG13,5-M68N-PNES-LG - Cable gland



1424488

<https://www.phoenixcontact.com/us/products/1424488>

Ambient temperature (operation)	-40 °C ... 100 °C (static)
---------------------------------	----------------------------

Mounting

Assembly instructions	1) Mount screw connection support in the housing using the correct torque 2) Insert cable 3) Tighten union nut using the correct torque
-----------------------	---

G-INS-PG13,5-M68N-PNES-LG - Cable gland


1424488

<https://www.phoenixcontact.com/us/products/1424488>



Drawings

Dimensional drawing

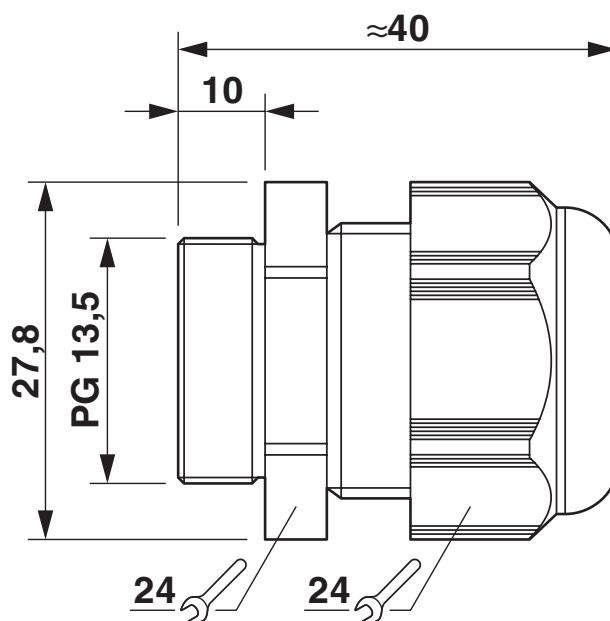

Dimensional drawing

G-INS-PG13,5-M68N-PNES-LG - Cable gland



1424488

<https://www.phoenixcontact.com/us/products/1424488>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1424488>

DNV

Approval ID: TAE00003WX



CSA

Approval ID: 115116



UL Listed

Approval ID: E199260



cUL Listed

Approval ID: E199260

cULus Listed

G-INS-PG13,5-M68N-PNES-LG - Cable gland



1424488

<https://www.phoenixcontact.com/us/products/1424488>

Classifications

ECLASS

ECLASS-11.0	27144432
ECLASS-12.0	27140801
ECLASS-13.0	27140801

ETIM

ETIM 9.0	EC000441
----------	----------

UNSPSC

UNSPSC 21.0	39121300
-------------	----------

G-INS-PG13,5-M68N-PNES-LG - Cable gland



1424488

<https://www.phoenixcontact.com/us/products/1424488>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

G-INS-PG13,5-M68N-PNES-LG - Cable gland

1424488

<https://www.phoenixcontact.com/us/products/1424488>



Accessories

A-INL-PG13,5-P-GY - Counter nut

1411224

<https://www.phoenixcontact.com/us/products/1411224>

Counter nut, for threads Pg13.5, color: silver-grey RAL 7001



SEALING PLUG 9X16 RD - Closing cap

1400259

<https://www.phoenixcontact.com/us/products/1400259>

Closing cap, color: red



Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com