



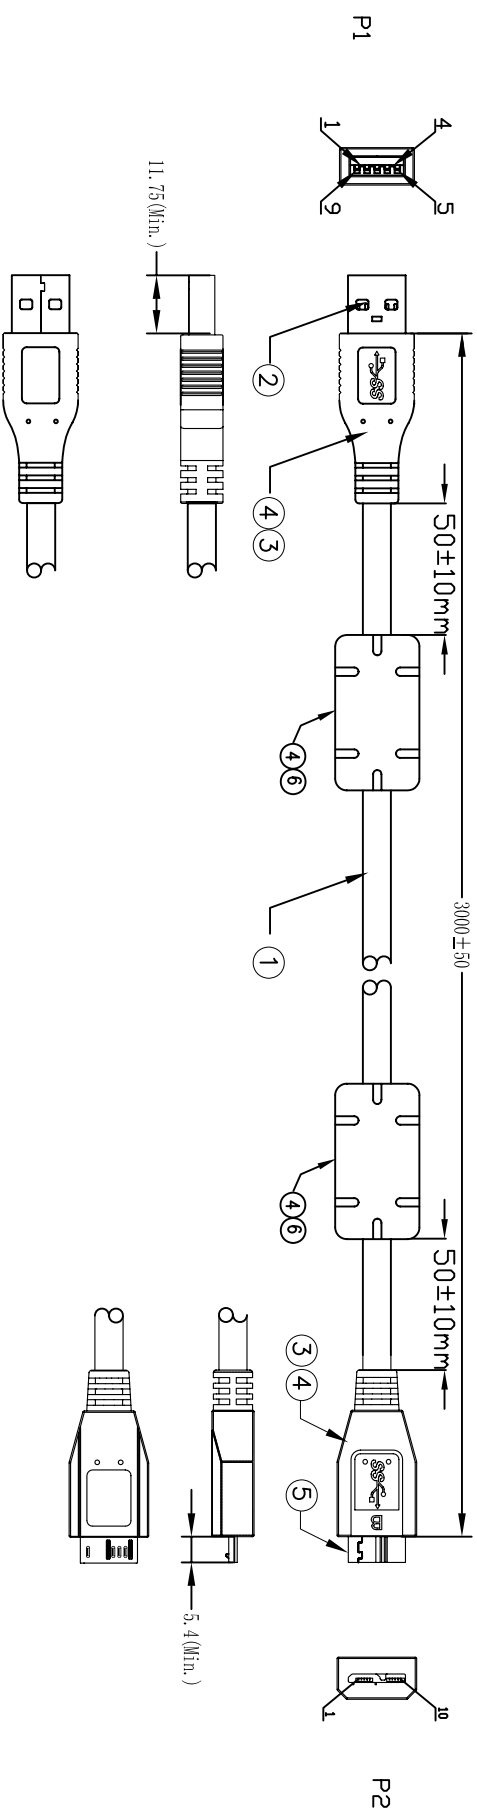

1.Wiring Diagram.

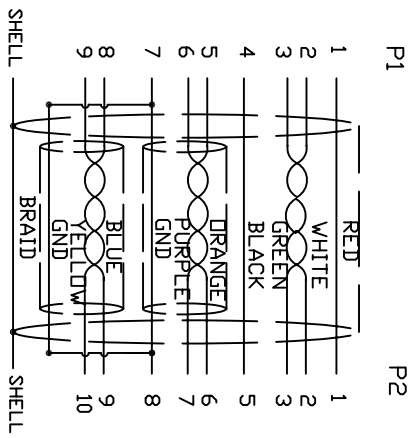

2.Cable test condition :

Open / Short : 100%

Insulation resistance : 5M ohms

Contact resistance : 2 ohm

Hipot : DC 300V / 1 sec

3.Each pcs with PE palybag

6	CORE	RH14.2*28.5*6.35mm	2		A	2015/11/24	DATE
5	CONN	USB3.0 MICRO B MAILE G/F BLACK	1	P2	REVECN#		DESCRIPTION
4	PVC	45P PVC BLACK OVERMOLD	25g				
3	PE	LLDPE 500026 6201	16g				
2	CONN	USB3.0 A/M G/F BLUE	1	P1			
1	CABLE	《28AWG (7/0.127T) *IP+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *IP+24AWG(7/0.21T)*2C+A+D+B (11/6/0.12AM) OD5.5 BLACK	1	3000mm			
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF	Cnc Tech,LLC		
BILL OF MATERIAL					DRAWN	EDWIN LAI	DATE
					CHECKED	WENC	11/24/15
					APPROVAL		
					SHEET 1 OF 1		