


Data sheet | Item number: 706-3033/203-200

System cable; for Schneider Modicon TM3; 16 digital outputs; Length: 2 m;  
 Conductor cross-section: 0.14 mm<sup>2</sup>



[www.wago.com/706-3033/203-200](http://www.wago.com/706-3033/203-200)

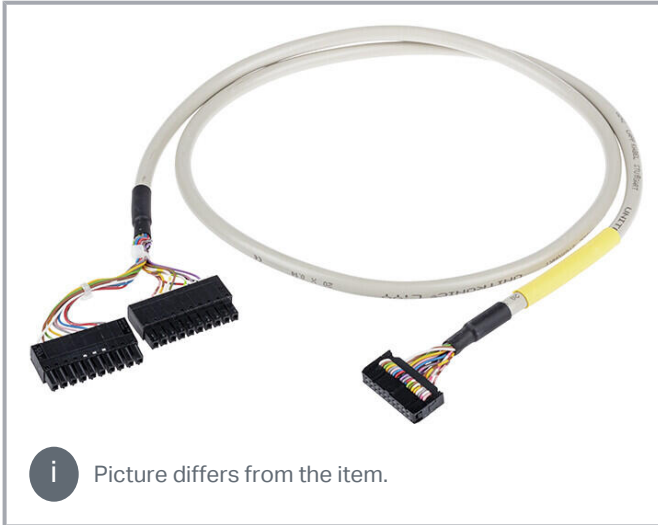

**i** Picture differs from the item.

Color coding acc. to DIN VDE 47100		20 poles flat connector		PLC connector	
		Pin number	Wiring	Pin number	Signal
White		1	0.0	1	OUT0
Brown		2	0.1	2	OUT1
Green		3	0.2	3	OUT2
Yellow		4	0.3	4	OUT3
Grey		5	0.4	5	OUT4
Pink		6	0.5	6	OUT5
Blue		7	0.6	7	OUT6
Red		8	0.7	8	OUT7
Black		9	1.0	11	OUT8
Violet		10	1.1	12	OUT9
Grey-Pink		11	1.2	13	OUT10
Red-Blue		12	1.3	14	OUT11
White-Green		13	1.4	15	OUT12
Brown-Green		14	1.5	16	OUT13
White-Yellow		15	1.6	17	OUT14
Yellow-Brown		16	1.7	18	OUT15
White-Grey		17	+24V	9	V+
Grey-Brown		18	0V	10	V-
White-Pink		19	+24V	19	V+
Pink-Brown		20	0V	20	V-

**Data  
Notes**

Note When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



## Electrical data

Inputs/outputs	16 digital outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

## Compatibility

### Schneider

Schneider Modicon TM3	TM3 DQ16T(G)
-----------------------	--------------

## Connection data

Cable type	LIYY
Color code	per DIN VDE 47100

## Connection 1

Connector	Pluggable connector per DIN 41651; female connector
Pole number 1	20
Connection type 1	System
Wire cross-section	0.14 mm <sup>2</sup>

## Connection 2

Connector 2	TM3 DQ16T(G)
Pole number 2	20
Connection type 2	System

## Physical data

Cable length	2 m
--------------	-----

## Material data

Weight	210 g
--------	-------

## Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
---------------------------------	----------------

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



## Commercial data

ETIM 8.0	EC000237
ETIM 7.0	EC000237
ECCN	NO DATA
PU (SPU)	1 pcs
Packaging type	bag
GTIN	4055143257527
Customs tariff number	85444290900

## Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

## Downloads

### Documentation

#### System Description

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 706-3033/203-200	URL	Download
System cable; for Schneider Modicon TM3; 16 digital outputs; Length: 2 m; Conductor cross-section: 0.14 mm <sup>2</sup>		

## Installation Notes

Subject to changes. Please also observe the further product documentation!