
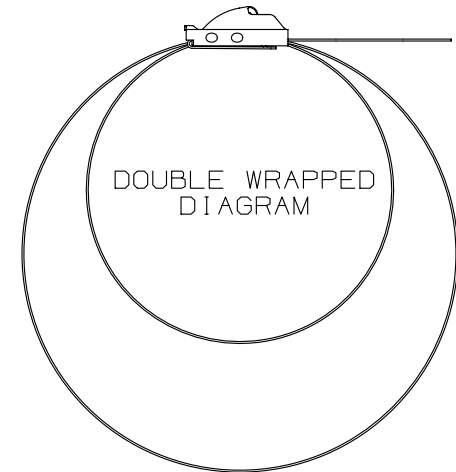



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	PACKAGE QUANTITY	MAXIMUM BUNDLE DIAMETER	LENGTH = "L" ±.2 [ 5 ]
MLT2DH-L	50	2.0" [ 50 ]	18.5" [ 470 ]
MLT4DH-L	50	4.0" [ 101 ]	28.0" [ 711 ]
MLT5DH-L	50	5.0" [ 127 ]	34.0" [ 863 ]
MLT6DH-Q	50	6.0" [ 152 ]	40.0" [ 1016 ]

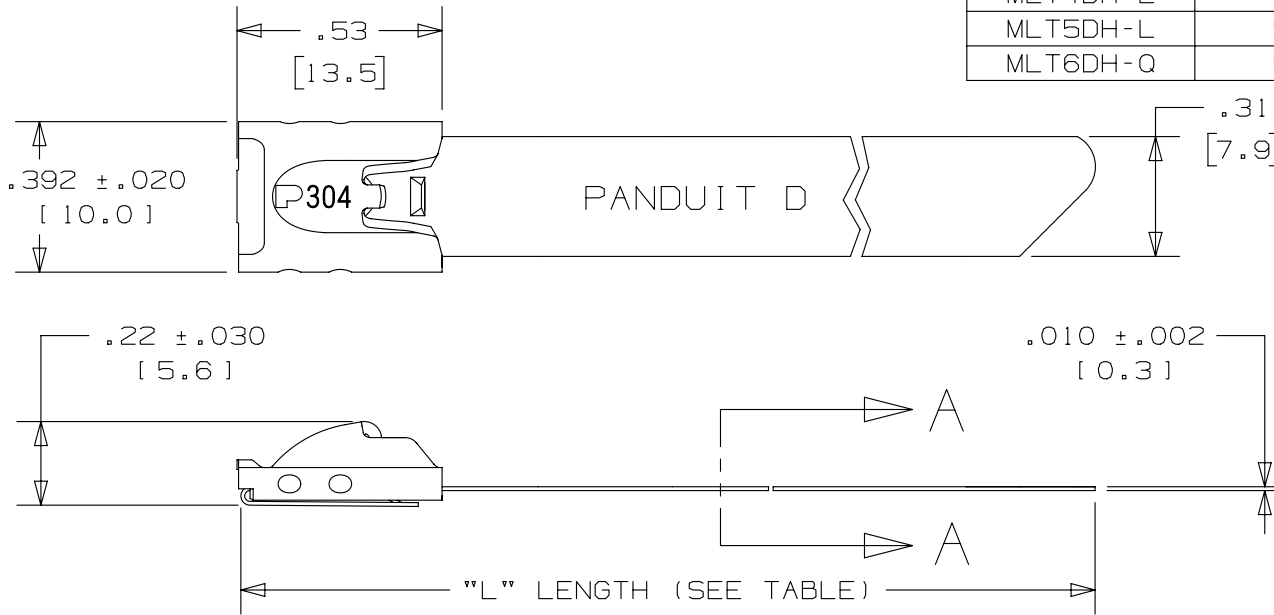

BODY WRAPS AROUND TWO TIMES ENTERING HEAD TWICE (NOT TO SCALE)

FULLY ROUNDED EDGES ALONG STRAP BODY

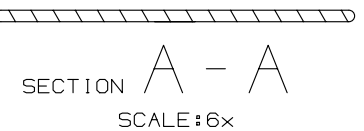

- NOTES:
- APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, AND HTMT
  - MINIMUM LOOP TENSILE STRENGTH - 600 LBS. (2669 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
  - BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
  - TOLERANCES:  
 .XXX = ±.010 [ .25 ]    .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]        ANGLES = ±2°
  - MATERIAL: 304 STAINLESS STEEL

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	MATERIAL:	DRAWING NUMBER:			
							DOUBLE WRAPPED METAL LOCKING TIE HEAVY SERIES	304 STAINLESS STEEL	N41142BS_DC			
							CUSTOMER DRAWING					
							ITEM REVISION NAME					
							N41142BS/05					
							DATASET FILE NAME					
							N41142BS/05					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]					
							.x ± .1 [ 2.54 ]    .xxx ± .005 [ .127 ]					
							.xx ± .01 [ .25 ]    ANGLES ± 5 °					
							THIRD ANGLE PROJECTION					
05A	3/13	JAMB	MIM	RGRO	UPDATE DRAWING TO NEW GLOBAL PANDUIT TITLE BLOCK WITH PANDUIT LOGO	SSECN01042						
04A	2/12	MIM	RGRO	----	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY	----						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
							JAMB	2/12	DPN	2:1		A