

## SPECIFICATION


**Material:** Nylon 6/6, 94V-2 certified by UL.

- Heat-resistant
- Acid & Erosion proof
- High Operating Temperature range

**Application Temperature:** -35°C to 85°C

**Installation Temperature:** -15°C to 85°C

Available Colors

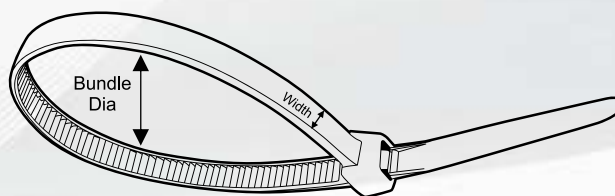

Model	Length (mm)	Width (mm)	Std. Loop Tensile Strength		Ø Max. Bundle Diameter	
			(Kgf)	(lbs)	(mm)	(Inches)
<b>MINIATURE SERIES</b>						
JG-100X2.5	100	1.9	8	18	22	0.87
JG-150X3	150	2	8	18	35	1.38
JG-200X3	200	2.2	8	18	50	1.97
JG-S100X2.5	100	2.5	8	18	22	0.87
JG-S150X2.5	150	2.5	8	18	35	1.38
JG-200X2.5	200	2.5	8	18	50	1.97
JG-250X4	250	2.8	18	40	65	2.56
<b>INTERMEDIATE SERIES</b>						
JG-150X4	150	3	18	40	35	1.38
JG-200X4	200	3	18	40	50	1.97
JG-300X4	300	3	18	40	80	3.15
JG-ST150X3.6	150	3.6	18	40	35	1.38
JG-S200X3.6	200	3.6	18	40	53	2.09
JG-S250X3.6	250	3.6	18	40	65	2.56
JG-300X3.6	300	3.6	18	40	80	3.15
JG-350X3.6	350	3.6	18	40	90	3.54
<b>STANDARD SERIES</b>						
JG-400X5	400	4	22	50	105	4.13
JG-250X5	250	4.3	22	50	65	2.56
JG-300X5	300	4.3	22	50	80	3.15
JG-350X5	350	4.3	22	50	90	3.54
JG-ST200X4.8	200	4.8	22	50	50	1.97
JG-ST250X4.8	250	4.8	22	50	65	2.56
JG-ST300X4.8	300	4.8	22	50	82	3.23
JG-ST350X4.8	350	4.8	22	50	90	3.54
JG-ST400X4.8	400	4.8	22	50	105	4.13
JG-ST450X4.8	450	4.8	22	50	130	5.12
JG-S500X4.8	500	4.8	22	50	150	5.91
<b>HEAVY SERIES</b>						
JG-H300X7.6	300	7.6	55	120	82	3.23
JG-H400X7.6	400	7.6	55	120	108	4.25
JG-H450X7.6	450	7.6	55	120	125	4.92
JG-550X9	550	7.6	55	120	160	6.30
JG-650X9	650	7.6	55	120	190	7.48
JG-760X9	760	7.6	55	120	220	8.66
JG-920X9	920	9	80	175	276	10.87
<b>MARKER TIE</b>						
JG-100 MARKER	100	2.5M	8	18	22	0.87
JG-200 MARKER	200	2.5M	8	18	50	1.97