



Product Description

Eulex ultra-high Q and ultra-low ESR XQ-series capacitors feature ultra-high Q, ultra-high self-resonance frequencies and ultra-low ESR. Manufactured with stable NP0 & X8G dielectrics ($\pm 30\text{ppm}/^\circ\text{C}$). Pb-free terminations and copper electrodes.


Features

- High Q
- Low ESR/ESL
- Ultra Stable Dielectric Characteristic $\pm 30\text{ppm}/^\circ\text{C}$
- Capacitance (0.1 pF to 1000pF)
- Size 01005 to 1111
- Voltage up to 1500V
- RoHS Compliant


Applications

- Power Station
- Base Station
- UHF/Microwave
- Timing Circuits
- Mixers

Ultra-High Q

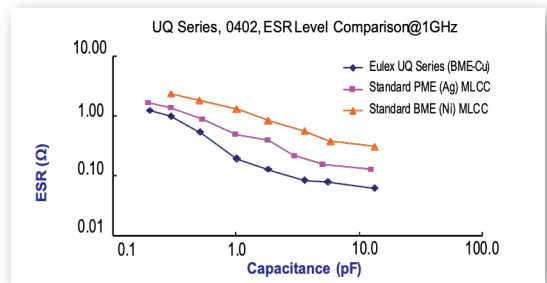

Ultra-Low ESR

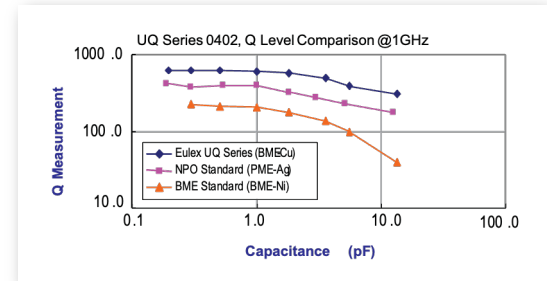

Part Numbering

XQ	G	02	N	0R5	B	N	T
Series	Voltage Code	Case Code	Dielectric Type	* Capacitance	Tolerance	Termination	** Packaging
Ultra-High Q	A = 6.3VDC	01 = 01005	N = NP0	R05 = 0.05pF	A = $\pm 0.05\text{pF}$	N = Cu/Ni/Sn	T = 7" reel
	C = 10VDC	02 = 0201	G = X8G	OR2 = 0.20pF	B = $\pm 0.10\text{pF}$		R = 13" reel
	E = 16VDC	04 = 0402		1R0 = 1.0pF	C = $\pm 0.25\text{pF}$		
	L = 25VDC	05 = 0505		2R7 = 2.7pF	D = $\pm 0.5\text{pF}$		
	G = 50VDC	06 = 0603		270 = 27pF	F = $\pm 1\%$		
	B = 100VDC	08 = 0805		271 = 270pF	G = $\pm 2\%$		
	R = 200VDC	11 = 1111		102 = 1000pF	J = $\pm 5\%$		
	H = 250VDC						
	S = 500VDC						
	F = 1500VDC						

* Below 10pF, R denotes a decimal point.

For 10pF and above, first 2 digits are significant values and 3rd digit indicates the number of zeros.


** 0505 and 1111 Case sizes shipped in plastic carrier tape. All other case sizes are shipped in paper carrier.





Standard Dimensions

Case Size EIA (metric)	Length (L) inch (mm)	Width (W) Inch (mm)	Thickness (T) inch (mm)	End-Band (B) inch (mm)
01 01005 (0402)	.016±.001 (0.40±0.02)	.008±.001 (0.20±0.02)	.008±.001 (0.20±0.02)	.004±.001 (0.10±0.03)
02 0201 (0603)	.024±.001 (0.60±0.03)	0.012±.001 (0.30±0.03)	0.012±.001 (0.30±0.03)	.006±.002 (0.15±0.05)
04 0402 (1005)	.039±.002 (1.00±0.05)	.020±.002 (0.50±0.05)	.020±.002 (0.50±0.05)	.010+.002/- .004 (0.25+0.05/-0.10)
05 0505 (1414)	.055+.015/- .010 (1.40+0.38/-0.25)	.055±.015 (1.40±0.38)	.045±.006 (1.15±0.15)	.010+.010/- .005 (0.25+0.25/-0.13)
06 0603 (1608)	.063±.004 (1.60±0.10)	.031±.004 (0.80±0.10)	.031±.003 (0.80±0.07)	.016±.005 (0.40±0.15)
06 * 0603 (1608)	.063+.006/- .004 (1.60+0.15/-0.10)	.031+.006/- .004 (0.80+0.15/-0.10)	.020±.004 (0.50±0.10)	.016±.005 (0.40±0.15)
08 0805 (2012)	.079±.006 (2.00±0.15)	.049±.004 (1.25±0.10)	.024±.004 (0.60±0.10)	.020±.008 (0.50±0.20)
08 * 0805 (2012)	.079±.008 (2.00±0.20)	.049±.008 (1.25±0.20)	.033±.004 (0.85±0.10)	.020±.008 (0.50±0.20)
11 1111 (2828)	.110+.020/- .010 (2.79+0.51/-0.25)	.110±.015 (2.79±0.38)	≤.070 (≤1.78)	.015±.010 (0.38±0.25)



Dielectric Properties & Electrical Summary

Dielectric	NPO (Class I)	X8G (Class I)
Size	01005, 0201, 0402, 0505, 0603, 0805, 1111	0603, 0805
Capacitance ₁	0.1pF to 1000pF	0.2pF to 82pF
Capacitance Tolerance	Cap≤5pF: A (±0.05pF), B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: B (±0.1pF), C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%)	
Rated Voltages (WVDC)	6.3V, 10V, 25V, 50V, 100V, 200V, 250V, 500V, 1500V	250V, 500V
Q ₂	01005, 0201, 0402/25V to 50V: Cap<30pF:Q≥400+20C; Cap≥30pF:Q≥1000 0402/100V~200V, 0603, 0805, 0505, 1111: Cap<30pF:Q≥800+20C; Cap≥30pF:Q≥1400	
Insulation Resistance	≥10GΩ @ 25°C or ≥100GΩ @ 125°C	
Operating Temperature	-55 to +125°C	-55 to +150°C
Capacitance Change (TC)	±30ppm/°C	
Dissipation Factor (DF)	0.10% Max	0.15% Max

1. Measured at 1.0±0.2Vrms, 1.0MHz±10% for capacitance values ≤1000pF and 1.0kHz±10% for capacitance>1000pF

2. Measured at 25°C and between 30% to 70% relative humidity.



Available Capacitance Values

X8G Dielectric (0603 - 0805)

Capacitance	Case Size		Tolerance
	0603	0805	
	250	500	
0.2pF (0R2)	●	●	A, B
0.3pF (0R3)	●	●	A, B
0.4pF (0R4)	●	●	A, B
0.5pF (0R5)	●	●	A, B, C
0.6pF (0R6)	●	●	A, B, C
0.7pF (0R7)	●	●	A, B, C
0.8pF (0R8)	●	●	A, B, C
0.9pF (0R9)	●	●	A, B, C
1.0pF (1R0)	●	●	A, B, C
1.1pF (1R1)	●	●	A, B, C
1.2pF (1R2)	●	●	A, B, C
1.3pF (1R3)	●	●	A, B, C
1.4pF (1R4)	●	●	A, B, C
1.5pF (1R5)	●	●	A, B, C
1.6pF (1R6)	●	●	A, B, C
1.7pF (1R7)	●	●	A, B, C
1.8pF (1R8)	●	●	A, B, C
1.9pF (1R9)	●	●	A, B, C
2.0pF (2R0)	●	●	A, B, C
2.1pF (2R1)	●	●	A, B, C
2.2pF (2R2)	●	●	A, B, C
2.3pF (2R3)	●	●	A, B, C
2.4pF (2R4)	●	●	A, B, C
2.5pF (2R5)	●	●	A, B, C
2.6pF (2R6)	●	●	A, B, C
2.7pF (2R7)	●	●	A, B, C
2.8pF (2R8)	●	●	A, B, C
2.9pF (2R9)	●	●	A, B, C
3.0pF (3R0)	●	●	A, B, C
3.1pF (3R1)	●	●	A, B, C
3.2pF (3R2)	●	●	A, B, C
3.3pF (3R3)	●	●	A, B, C
3.4pF (3R4)	●	●	A, B, C
3.5pF (3R5)	●	●	A, B, C
3.6pF (3R6)	●	●	A, B, C
3.7pF (3R7)	●	●	A, B, C
3.8pF (3R8)	●	●	A, B, C
3.9pF (3R9)	●	●	A, B, C
4.0pF (4R0)	●	●	A, B, C
4.1pF (4R1)	●	●	A, B, C
4.2pF (4R2)	●	●	A, B, C
4.3pF (4R3)	●	●	A, B, C
4.4pF (4R4)	●	●	A, B, C
4.5pF (4R5)	●	●	A, B, C
4.6pF (4R6)	●	●	A, B, C
4.7pF (4R7)	●	●	A, B, C
4.8pF (4R8)	●	●	A, B, C
4.9pF (4R9)	●	●	A, B, C
5.0pF (5R0)	●	●	A, B, C
5.1pF (5R1)	●	●	B, C, D
5.2pF (5R2)	●	●	B, C, D
5.3pF (5R3)	●	●	B, C, D
5.4pF (5R4)	●	●	B, C, D
5.5pF (5R5)	●	●	B, C, D
5.6pF (5R6)	●	●	B, C, D
5.7pF (5R7)	●	●	B, C, D
5.8pF (5R8)	●	●	B, C, D
5.9pF (5R9)	●	●	B, C, D
6.0pF (6R0)	●	●	B, C, D

CONTINUED - X8G Dielectric (0603 - 0805)

Capacitance	Case Size		Tolerance
	0603	0805	
	250	500	
6.1pF (6R1)	●	●	B, C, D
6.2pF (6R2)	●	●	B, C, D
6.3pF (6R3)	●	●	B, C, D
6.4pF (6R4)	●	●	B, C, D
6.5pF (6R5)	●	●	B, C, D
6.6pF (6R6)	●	●	B, C, D
6.7pF (6R7)	●	●	B, C, D
6.8pF (6R8)	●	●	B, C, D
6.9pF (6R9)	●	●	B, C, D
7.0pF (7R0)	●	●	B, C, D
7.1pF (7R1)	●	●	B, C, D
7.2pF (7R2)	●	●	B, C, D
7.3pF (7R3)	●	●	B, C, D
7.4pF (7R4)	●	●	B, C, D
7.5pF (7R5)	●	●	B, C, D
7.6pF (7R6)	●	●	B, C, D
7.7pF (7R7)	●	●	B, C, D
7.8pF (7R8)	●	●	B, C, D
7.9pF (7R9)	●	●	B, C, D
8.0pF (8R0)	●	●	B, C, D
8.1pF (8R1)	●	●	B, C, D
8.2pF (8R2)	●	●	B, C, D
8.3pF (8R3)	●	●	B, C, D
8.4pF (8R4)	●	●	B, C, D
8.5pF (8R5)	●	●	B, C, D
8.6pF (8R6)	●	●	B, C, D
8.7pF (8R7)	●	●	B, C, D
8.8pF (8R8)	●	●	B, C, D
8.9pF (8R9)	●	●	B, C, D
9.0pF (9R0)	●	●	B, C, D
9.1pF (9R1)	●	●	B, C, D
9.2pF (9R2)	●	●	B, C, D
9.3pF (9R3)	●	●	B, C, D
9.4pF (9R4)	●	●	B, C, D
9.5pF (9R5)	●	●	B, C, D
9.6pF (9R6)	●	●	B, C, D
9.7pF (9R7)	●	●	B, C, D
9.8pF (9R8)	●	●	B, C, D
9.9pF (9R9)	●	●	B, C, D
10pF (100)	●	●	F, G, J
11pF (110)	●	●	F, G, J
12pF (120)	●	●	F, G, J
13pF (130)	●	●	F, G, J
15pF (150)	●	●	F, G, J
16pF (160)	●	●	F, G, J
18pF (180)	●	●	F, G, J
20pF (200)	●	●	F, G, J
22pF (220)	●	●	F, G, J
24pF (240)	●	●	F, G, J
27pF (270)	●	●	F, G, J
30pF (300)	●	●	F, G, J
33pF (330)	●	●	F, G, J
36pF (360)	●	●	F, G, J
39pF (390)	●	●	F, G, J
43pF (430)	●	●	F, G, J
47pF (470)	●	●	F, G, J
56pF (560)	●	●	F, G, J
68pF (680)	●	●	F, G, J
82pF (820)	●	●	F, G, J

NPO Dielectric (01005)


Capacitance	Case Size		Tolerance
	01005		
	16	25	
0.2pF (0R2)	●	●	A, B
0.3pF (0R3)	●	●	A, B
0.4pF (0R4)	●	●	A, B
0.5pF (0R5)	●	●	A, B, C
0.6pF (0R6)	●	●	A, B, C
0.7pF (0R7)	●	●	A, B, C
0.75pF (R75)	●	●	A, B, C
0.8pF (0R8)	●	●	A, B, C
0.9pF (0R9)	●	●	A, B, C
1.0pF (1R0)	●	●	A, B, C
1.2pF (1R2)	●	●	A, B, C
1.5pF (1R5)	●	●	A, B, C
1.8pF (1R8)	●	●	A, B, C
2.0pF (2R0)	●	●	A, B, C
2.2pF (2R2)	●	●	A, B, C
2.7pF (2R7)	●	●	A, B, C
3.0pF (3R0)	●	●	A, B, C
3.3pF (3R3)	●	●	A, B, C
3.9pF (3R9)	●	●	A, B, C
4.0pF (4R0)	●	●	A, B, C
4.7pF (4R7)	●	●	A, B, C
5.0pF (5R0)	●	●	A, B, C
5.6pF (5R6)	●	●	B, C, D
6.0pF (6R0)	●	●	B, C, D
6.8pF (6R8)	●	●	B, C, D
7.0pF (7R0)	●	●	B, C, D
8.0pF (8R0)	●	●	B, C, D
8.2pF (8R2)	●	●	B, C, D
9.0pF (9R0)	●	●	B, C, D
10pF (100)	●	●	C, D, G
12pF (120)	●	●	J
15pF (150)	●	●	J
20pF (200)	●	●	J
22pF (220)	●	●	J

- Capacitance available
- ◐ Capacitance available (thin profile)






Frequency Characteristics

SRF vs Cap (0201 thru 111)

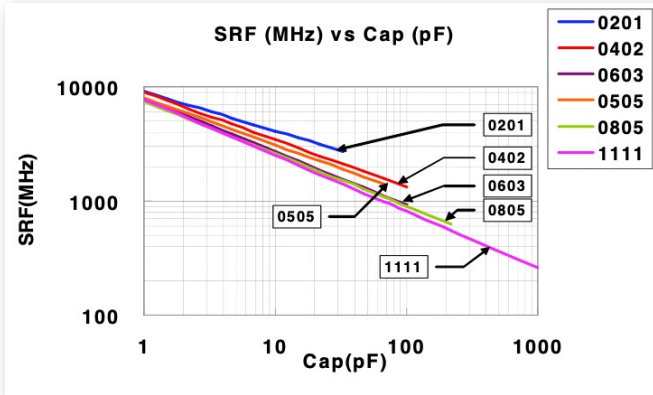


01005 Frequency Characteristics

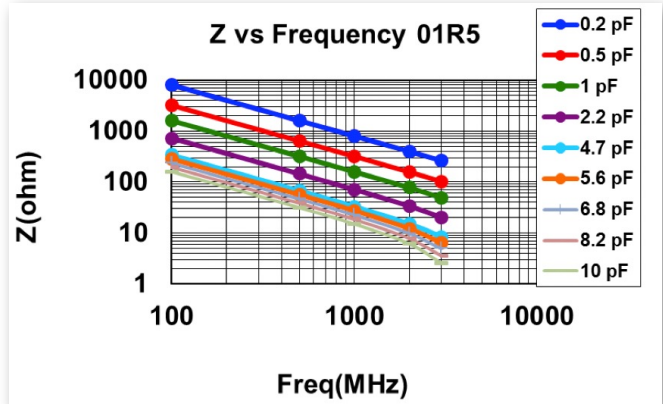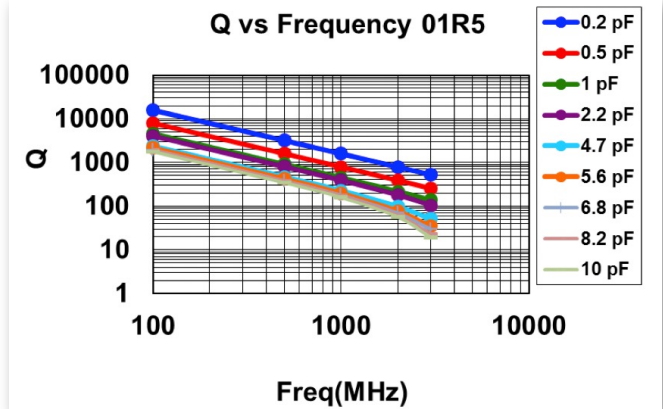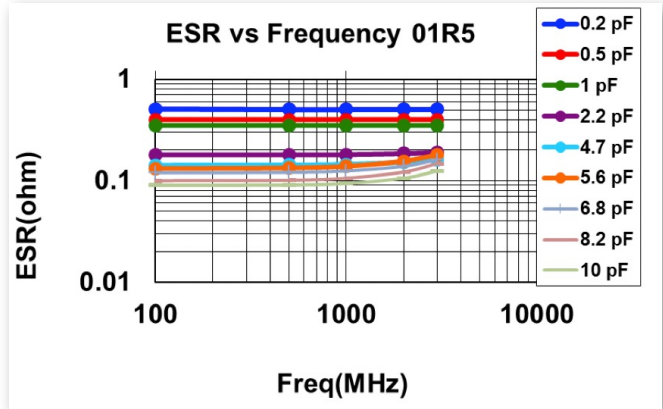








Frequency Characteristics

0201 Frequency Characteristics

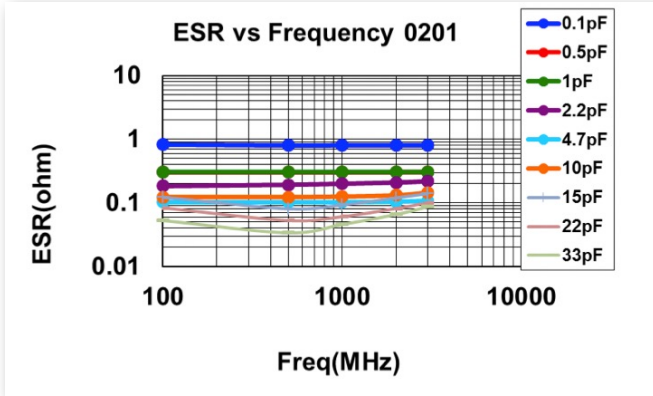


0402 Frequency Characteristics

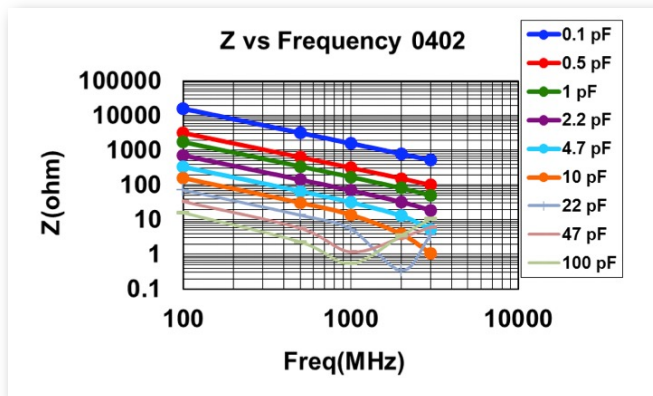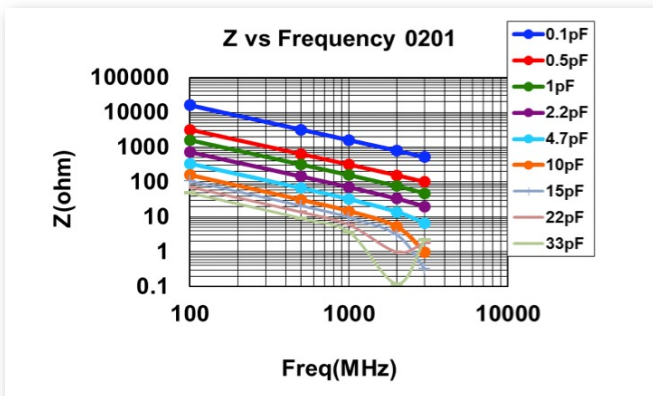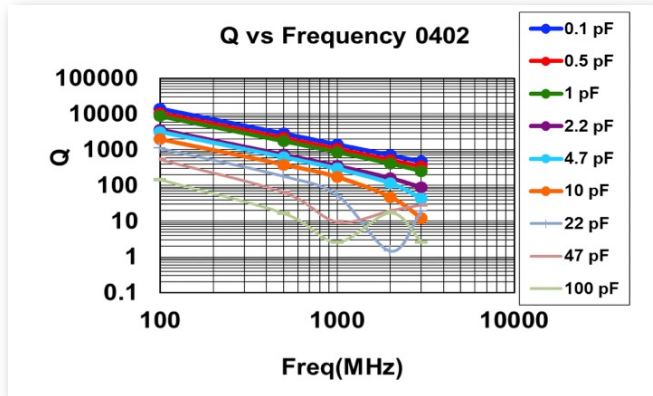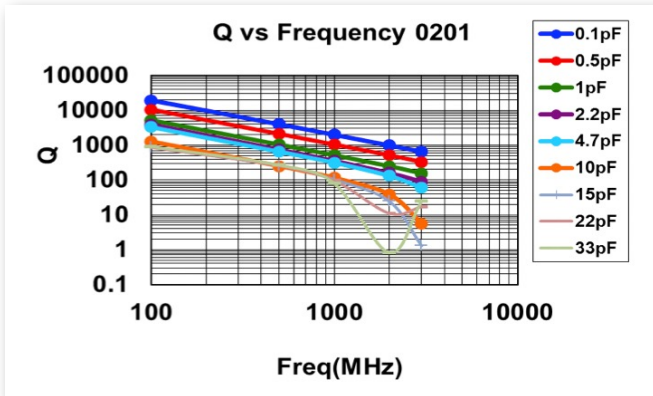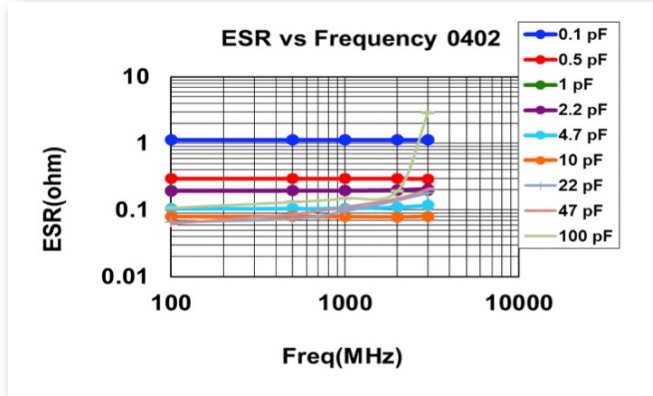








Frequency Characteristics

0603 Frequency Characteristics

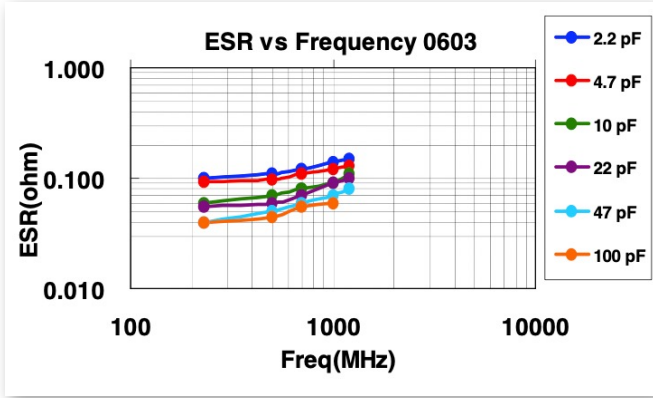


0805 Frequency Characteristics

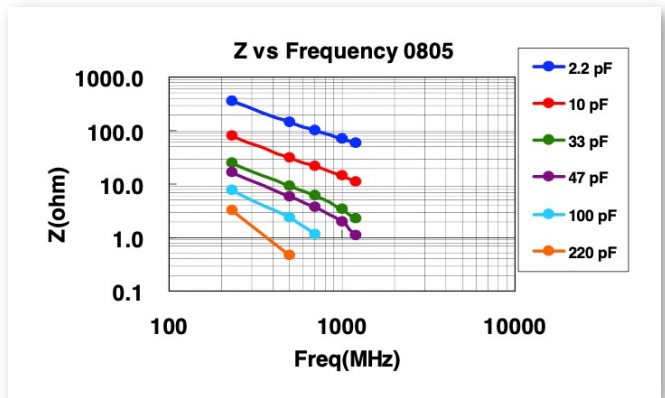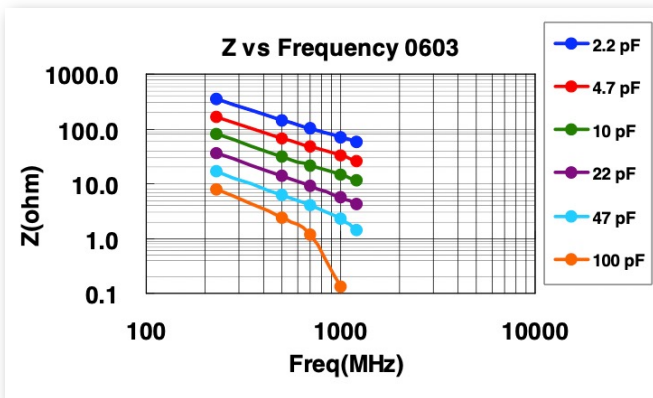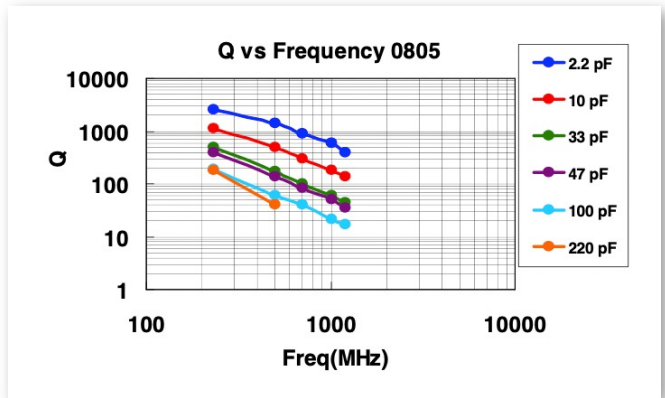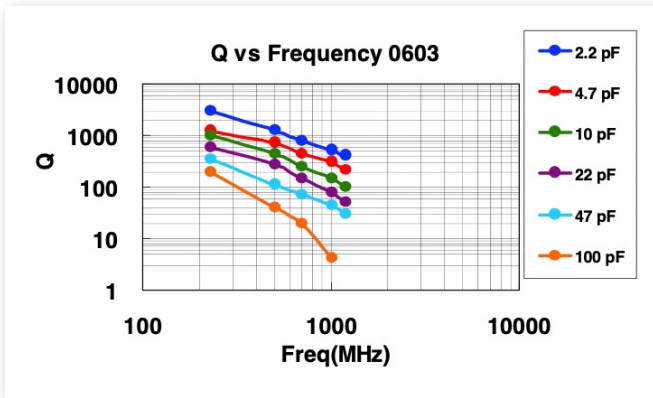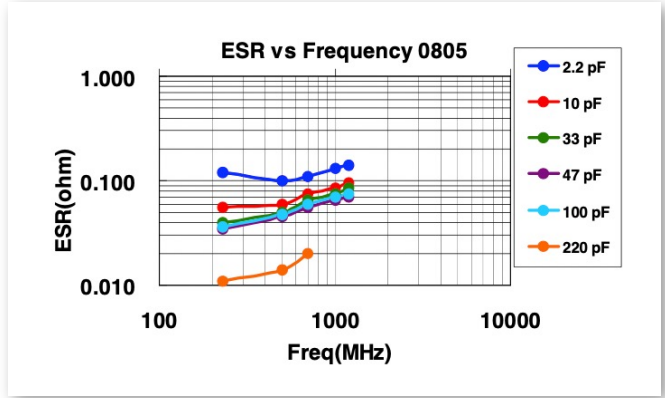








Frequency Characteristics

0505 Frequency Characteristics

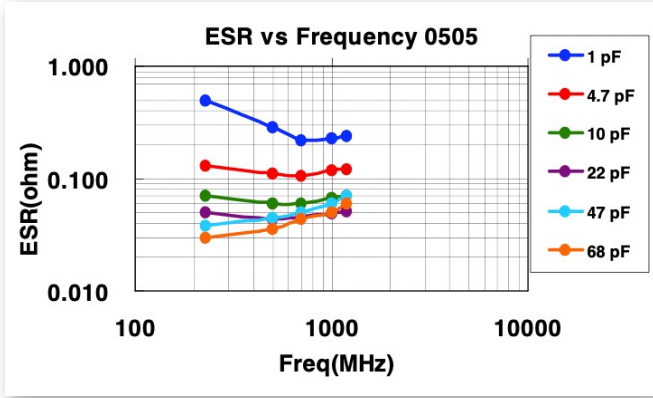

1111 Frequency Characteristics

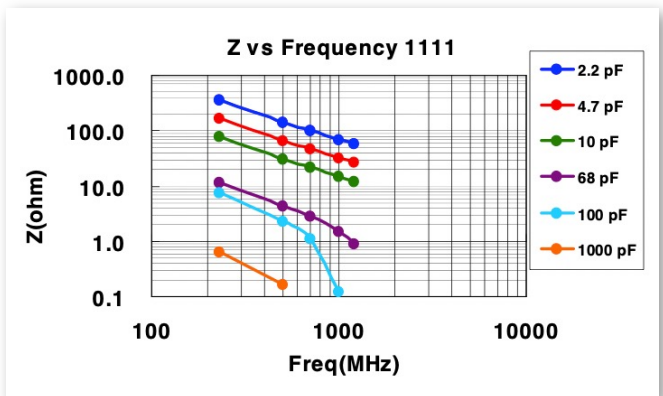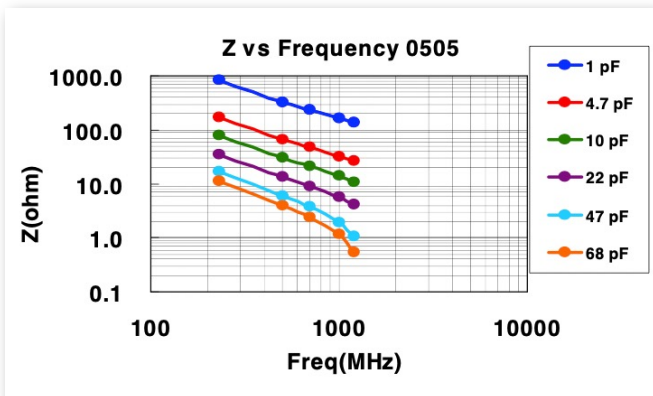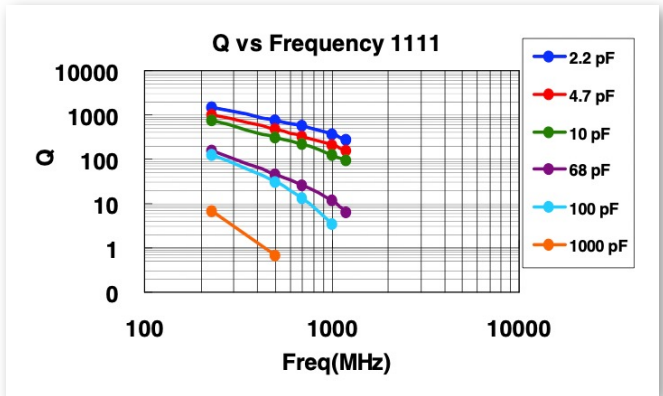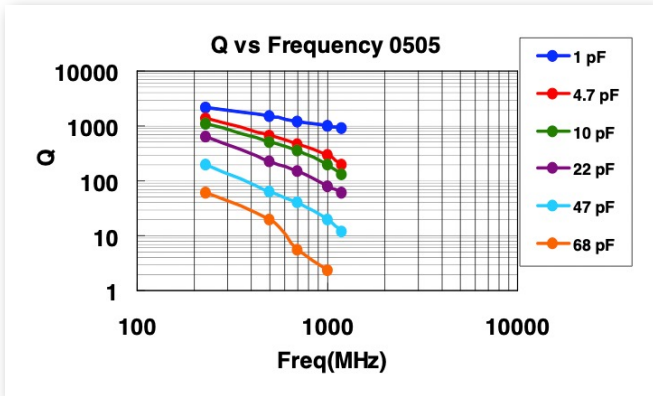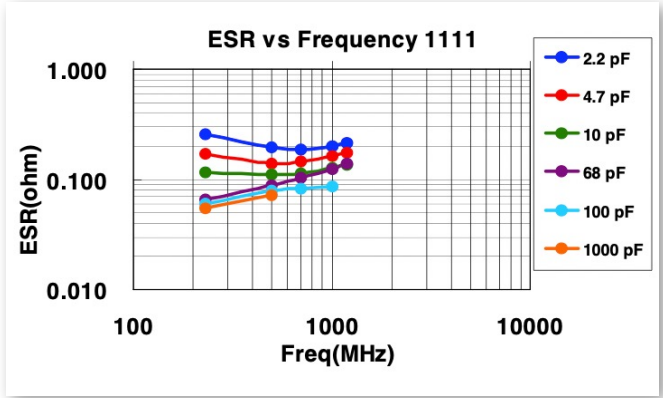



XQ – Series Test Conditions

No.	Item	Test Condition	Requirements
1	Visual & Dimensions	Suitable optical or mechanical measurement system	<ul style="list-style-type: none"> No major defects Conforms to individual specification sheet
2	Capacitance	<ul style="list-style-type: none"> For capacitance $\leq 1000\text{pF}$: $1.0 \pm 0.2V_{rms}$, $1.0\text{MHz} \pm 10\%$ 	<ul style="list-style-type: none"> Shall not exceed specified capacitance plus allowed tolerance
3	Q / DF	<ul style="list-style-type: none"> For capacitance values $> 1000\text{pF}$: $1.0 \pm 0.2V_{rms}$, $1.0\text{kHz} \pm 10\%$ Measured at room temperature 	
4	Dielectric Strength	<ul style="list-style-type: none"> Applied voltage: <ul style="list-style-type: none"> $\leq 100V$: 250% of rated voltage. (RF02: 300% rated voltage.) $200V \sim 300V$: 200% rated voltage. $500V \sim 999V$: 150% rated voltage. $1000V \sim 3000V$: 120% rated voltage. Duration: 1 to 5 sec. Charge & discharge current $< 50\text{mA}$. 	<ul style="list-style-type: none"> No evidence of damage or arc-over during test.
5	Insulation Resistance	<ul style="list-style-type: none"> Time rated voltage applied <ul style="list-style-type: none"> $\leq 100V \rightarrow$ max. 120 sec. $\geq 200V \rightarrow$ max 60 sec. (Max 500V) Test at room temperature 	<ul style="list-style-type: none"> $\geq 10G\Omega$ or $RxC \geq 100\Omega \cdot F$ whichever is smaller
6	Temperature Coefficient	<ul style="list-style-type: none"> No electrical load Allow temperature to equilibrate prior to measure 	<ul style="list-style-type: none"> Capacitance change: within $\pm 30\text{ppm}/^\circ\text{C}$; <ul style="list-style-type: none"> \rightarrow NP0: $-55 \sim 125^\circ\text{C}$ at 25°C \rightarrow X8G: $-55 \sim 150^\circ\text{C}$ at 25°C
7	Termination Adhesion Strength	<ul style="list-style-type: none"> Applied Force <ul style="list-style-type: none"> 01005: 1N; 0201: 2N; 0402 to 0603: 5N; > 0603: 10N Test time: 10 ± 1 sec. 	<ul style="list-style-type: none"> No major damage or removal of termination
8	Vibration Resistance	<ul style="list-style-type: none"> Vibration frequency: $10 \sim 55$ Hz/min. Total amplitude: 1.5mm Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.) Cap./DF(Q) Measurement to be made after de-aging at 150°C for 1hr then set for 24 ± 2 hrs at room temp 	<ul style="list-style-type: none"> No major damage Capacitance change, Q and DF to meet initial specification
9	Solderability	<ul style="list-style-type: none"> Solder temperature: $235 \pm 5^\circ\text{C}$ Dipping time: 2 ± 0.5 sec. 	<ul style="list-style-type: none"> 95% min. coverage of all metalized area.
10	Bend Test	<ul style="list-style-type: none"> Force applied to middle of substrate at a rate of approx. 1mm/s until 1mm deflection achieved, pressure maintained for 5 ± 1 sec. 	<ul style="list-style-type: none"> No major damage Capacitance change before and after test within $\pm 5.0\%$ or $\pm 0.5\text{pF}$ (whichever is larger).
11	Resistance to Soldering Heat	<ul style="list-style-type: none"> Solder temperature: $260 \pm 5^\circ\text{C}$ Dipping time: 10 ± 1 sec Preheating: $120 \sim 150^\circ\text{C}$ for 1 min before immersion Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then 24hr age at RT 	<ul style="list-style-type: none"> No major damage Capacitance change: within $\pm 2.5\%$ or $\pm 0.25\text{pF}$ whichever is larger. Q/D.F., I.R. and dielectric strength meet initial spec 25% max. leaching on each edge.



CONTINUED XQ – Series Test Conditions




No.	Item	Test Condition	Requirements																												
12	Temperature Cycle	<ul style="list-style-type: none"> Conduct 5-cycles: <ol style="list-style-type: none"> Min operating temp: +0/-3°C for 30±3mins Room temp for 2-3mins Max operating temp: +0/-3°C for 30±3mins Room Temp for 2-3 mins Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then 24±2hr age at RT 	<ul style="list-style-type: none"> No major defects Cap change: within ±2.5% or ±0.25pF whichever is larger. Q/D.F., I.R. and dielectric strength: To meet initial requirements. 																												
13	Humidity (Steady State)	<ul style="list-style-type: none"> Test temp.: 40±2°C Humidity: 90~95% RH Test time: 500+24/-0hrs. Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then 24±2hr age at RT 	<ul style="list-style-type: none"> No major damage Cap change: within ±5.0% or ±0.5pF whichever is larger. Q/D.F. value: Cap≥30pF, Q≥350; 10pF≤Cap<30pF, Q≥275+2.5C Cap<10pF; Q≥200+10C I.R. ≥1GΩ 																												
14	Humidity (Under Load)	<ul style="list-style-type: none"> Test temp.: 40±2°C Humidity: 90~95%RH Test time: 500+24/-0 hrs. Applied voltage: rated voltage (MAX. 500V) Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then 24±2hr age at RT 	<ul style="list-style-type: none"> No major damage Cap change: within ±7.5% or ±0.75pF whichever is larger. Q/D.F. value: Cap≥30pF, Q≥200; Cap<30pF, Q≥100+10/3C I.R.: ≥500MΩ. 																												
15	High Temperature Load	<ul style="list-style-type: none"> Test temp.: NP0: 125±3°C X8G: 150±3°C Applied voltage: <ol style="list-style-type: none"> (1) 10V≤Ur<500V: 200% rated voltage. (2) ≤6.3V or 500V: 150% rated voltage. (3) Ur≥630V: 120% rated voltage. Test time: 1000+24/-0 hrs. Cap. / DF(Q) / I.R. Measurement to be made after de-aging at 150°C for 1hr then 24±2hr age at RT 	<ul style="list-style-type: none"> No major damage Cap change: within ±3.0% or ±0.3pF whichever is larger. Q/D.F. value: Cap≥30pF, Q≥350; 10pF≤Cap<30pF, Q≥275+2.5C Cap<10pF; Q≥200+10C I.R. ≥1GΩ 																												
16	ESR	<ul style="list-style-type: none"> The ESR should be measured at room temperature and tested at 1.0±0.1 GHz. 	<table border="1"> <tr> <td rowspan="5">01005</td> <td>0.2pF≤Cap≤1pF: < 700mΩ/pF</td> <td rowspan="5">0201</td> <td>0.1pF≤Cap≤1pF: < 350mΩ/pF</td> </tr> <tr> <td>1pF<Cap≤2pF: < 600mΩ</td> <td>1pF<Cap≤5pF: < 300mΩ</td> </tr> <tr> <td>2pF<Cap≤5pF: < 500mΩ</td> <td>5pF<Cap≤10pF: < 300mΩ</td> </tr> <tr> <td>5pF<Cap≤10pF: < 300mΩ</td> <td>10pF<Cap≤22pF: < 350mΩ</td> </tr> <tr> <td>10pF<Cap≤22pF: < 350mΩ</td> <td></td> </tr> <tr> <td rowspan="3">0402</td> <td>0.1pF≤Cap≤1pF: < 350mΩ/pF</td> <td rowspan="3">0603</td> <td>0.1pF≤Cap≤1pF: < 1500mΩ</td> </tr> <tr> <td>1pF<Cap≤5pF: < 300mΩ</td> <td>1pF<Cap≤10pF: < 250mΩ</td> </tr> <tr> <td>5pF<Cap≤100pF: < 250mΩ</td> <td>10pF<Cap≤220pF: < 200mΩ</td> </tr> <tr> <td rowspan="3">0505</td> <td>0.4pF≤Cap<1.0pF: < 1500mΩ</td> <td rowspan="3">0805</td> <td>0.3pF≤Cap≤1pF: < 1500mΩ</td> </tr> <tr> <td>1.0pF≤Cap<10pF: < 250mΩ</td> <td>1pF<Cap≤10pF: < 250mΩ</td> </tr> <tr> <td>10pF≤Cap≤100pF: < 200mΩ</td> <td>Cap>10pF: < 200mΩ</td> </tr> </table>	01005	0.2pF≤Cap≤1pF: < 700mΩ/pF	0201	0.1pF≤Cap≤1pF: < 350mΩ/pF	1pF<Cap≤2pF: < 600mΩ	1pF<Cap≤5pF: < 300mΩ	2pF<Cap≤5pF: < 500mΩ	5pF<Cap≤10pF: < 300mΩ	5pF<Cap≤10pF: < 300mΩ	10pF<Cap≤22pF: < 350mΩ	10pF<Cap≤22pF: < 350mΩ		0402	0.1pF≤Cap≤1pF: < 350mΩ/pF	0603	0.1pF≤Cap≤1pF: < 1500mΩ	1pF<Cap≤5pF: < 300mΩ	1pF<Cap≤10pF: < 250mΩ	5pF<Cap≤100pF: < 250mΩ	10pF<Cap≤220pF: < 200mΩ	0505	0.4pF≤Cap<1.0pF: < 1500mΩ	0805	0.3pF≤Cap≤1pF: < 1500mΩ	1.0pF≤Cap<10pF: < 250mΩ	1pF<Cap≤10pF: < 250mΩ	10pF≤Cap≤100pF: < 200mΩ	Cap>10pF: < 200mΩ
			01005		0.2pF≤Cap≤1pF: < 700mΩ/pF		0201	0.1pF≤Cap≤1pF: < 350mΩ/pF																							
					1pF<Cap≤2pF: < 600mΩ			1pF<Cap≤5pF: < 300mΩ																							
					2pF<Cap≤5pF: < 500mΩ			5pF<Cap≤10pF: < 300mΩ																							
					5pF<Cap≤10pF: < 300mΩ			10pF<Cap≤22pF: < 350mΩ																							
				10pF<Cap≤22pF: < 350mΩ																											
			0402	0.1pF≤Cap≤1pF: < 350mΩ/pF	0603	0.1pF≤Cap≤1pF: < 1500mΩ																									
				1pF<Cap≤5pF: < 300mΩ		1pF<Cap≤10pF: < 250mΩ																									
				5pF<Cap≤100pF: < 250mΩ		10pF<Cap≤220pF: < 200mΩ																									
			0505	0.4pF≤Cap<1.0pF: < 1500mΩ	0805	0.3pF≤Cap≤1pF: < 1500mΩ																									
1.0pF≤Cap<10pF: < 250mΩ	1pF<Cap≤10pF: < 250mΩ																														
10pF≤Cap≤100pF: < 200mΩ	Cap>10pF: < 200mΩ																														
<ul style="list-style-type: none"> The ESR should be measured at room temperature and tested at 500±50 MHz. 	<p>0201, 22pF≤Cap≤33pF: < 300mΩ</p> <p>1111, 100pF<Cap≤1000pF: < 150mΩ</p>																														

"Room Temperature" or "RT" equivalent to 15 to 35°C, Relative humidity: 25 to 75%, Atmospheric pressure: 86 to 106kPa.



Packaging Dimensions & Part Count

SIZE	01005	0201	0402	0505	0603	0805	1111
A₀	0.25 ±0.05	0.40 ±0.10	0.70 ±0.20	<1.90	1.05 ±0.30	1.50 ±0.20	<3.05
B₀	0.45 ±0.05	0.70 ±0.10	1.20 ±0.20	<1.90	1.80 ±0.30	2.30 ±0.20	<3.80
T	≤ 0.50	≤ 0.55	≤ 0.80	0.23 ±0.10	≤ 1.20	≤ 1.20	0.23 ±0.10
K₀	N/A	N/A	N/A	<1.50	N/A	N/A	< 2.50
W	8.00 ±0.30	8.00 ±0.30	8.00 ±0.30	8.00 ±0.30	8.00 ±0.30	8.00 ±0.30	8.00 ±0.30
P₀	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10
10xP₀	40.00 ±0.1	40.00 ±0.1	40.00 ±0.1	40.00 ±0.1	40.00 ±0.1	40.00 ±0.1	40.00 ±0.1
P₁	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10	4.00 ±0.10
P₂	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05	2.00 ±0.05
D₀	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0	1.50 +0.1/-0
D₁	N/A	N/A	N/A	1.00 ±0.10	N/A	N/A	1.00 ±0.10
E	1.75 ±0.10	1.75 ±0.10	1.75 ±0.10	1.75 ±0.10	1.75 ±0.10	1.75 ±0.10	1.75 ±0.10
F	3.30 ±0.05	3.30 ±0.05	3.30 ±0.05	3.30 ±0.05	3.30 ±0.05	3.30 ±0.05	3.30 ±0.05

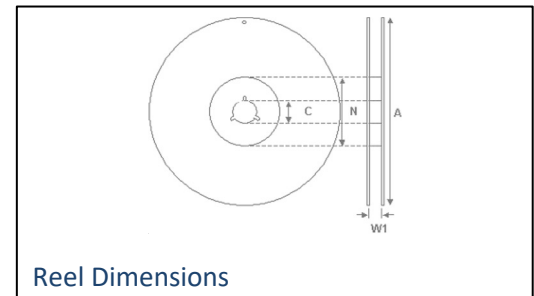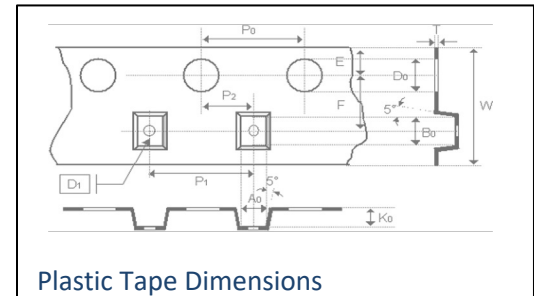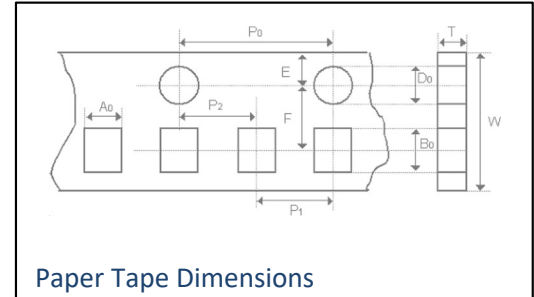

Size	Thickness (mm)	Type	7" Reel	13" Reel
01005	0.20±0.02	Paper	20,000	-
0201	0.30±0.03		15,000	70,000
0402	0.50±0.05		10,000	50,000
0603	0.80±0.07		4,000	15,000
	0.50±0.10		4,000	-
0805	0.60±0.10		4,000	15,000
	0.85±0.10	4,000	15,000	
0505	1.15±0.15	Plastic	3,000	-
1111	≤ 1.78		2,000	-

Reel Size	01001, 0201, 0402, 0505, 0603, 0805, 1111	
	7" Reel	13" Reel
C	13.0±0.5	13.0±0.5
W₁	10.0±1.5	10.0±1.5
A	178.0±2.0	330.0±2.0
N	60.0+1.0/-0.0	50.0 min



Storage & Handling Conditions


- Parts should be stored in their original packing where possible. Temperature should be between 5°C and 40°C. Relative humidity maintained between 20% to 70%
- Do not store in the presence of salts, hydrogen sulfide, sulfur dioxide, chloride gas, ammonia or other acid and alkali.
- It is recommended that the product be used within one year of receipt. Check solderability in case shelf-life extension is needed.

Soldering Conditions


Termination material is suitable for Pb-free soldering and high-Pb containing solder. Reflow and Wave solder profiles for SAC305 alloy are suggest below. The use of N₂ may be required to aide in solderability especially for higher temperature solder compositions. Case sizes ≤ 0402, 0505 and, 1111 should only be attached using reflow soldering.

Vapour phase soldering can expose parts to similar stresses to those experienced during wave reflow and similar pre-heat and cool down conditions should be considered.

Hand soldering and re-work using a soldering iron can expose the capacitors to very high temperature deltas increasing the risk to cracking of the ceramic body. If use of soldering iron can not be avoided, a fine tip iron not exceeding 30 watts should be used. Parts should be pre-heated carefully and the soldering iron tip must NOT touch the capacitor.

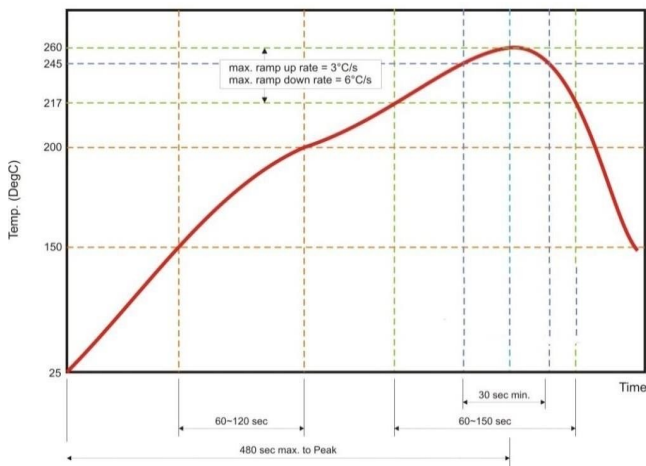

Recommended **reflow** profile for SAC305 (Sn/Ag/Cu alloy) solder pastes.

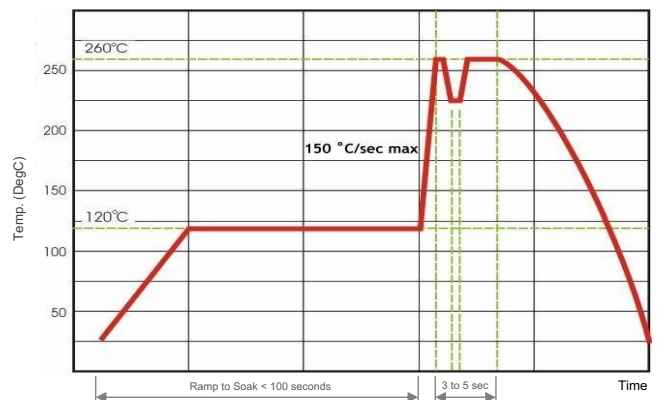

Recommended **wave** profile for SAC305 (Sn/Ag/Cu alloy) solder pastes.