
W67-X2Q110-20 - ACTIVE

Potter & Brumfield | Potter & Brumfield W6

TE Internal #: 4-1393252-3 Circuit Breakers, Magnetic, Series Trip, White, Operating Voltage 415 VAC / 240 VAC, 20A Current Rating, 1 Pole, Potter & Brumfield W6

View on TE.com >

Relays & Contactors > Circuit Breakers

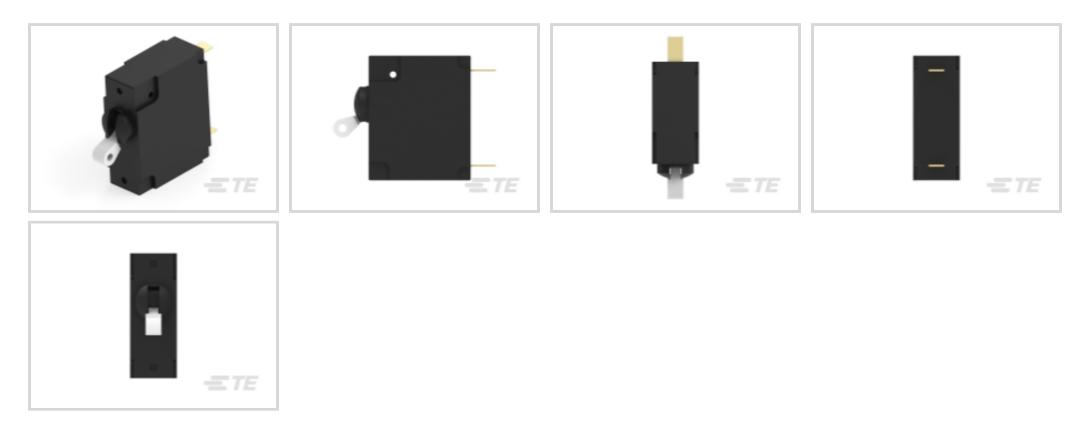

Circuit Breaker Type: Magnetic

Circuit Function: Series Trip

Illuminated: Without

Actuator Color: White

Operating Voltage: 240 VAC, 415 VAC

Features



Product Type Features

Illumination Type	No Light
Actuator Type	Toggle
Circuit Breaker Type	Magnetic
Illuminated	Without
Configuration Features	
	.75 x 1.66 in
Circuit Function	Series Trip
Number of Poles	1
Electrical Characteristics	
Operating Voltage	240 VAC, 415 VAC
Current Rating	20 A
Interrupt Capacity	5000A @ 277VAC
Body Features	
Actuator Color	White

C For support call +1 800 522 6752

W67-X2Q110-20

Circuit Breakers, Magnetic, Series Trip, White, Operating Voltage 415 VAC / 240 VAC, 20A Current Rating, 1 Pole, Potter & Brumfield W6



Contact Features	
Trip Time at 200%	9 - 100 seconds
Termination Features	
Terminal Configuration	6.35 [.25] Straight Quick Connect Tab
Mechanical Attachment	
Mounting Options	6-32 Mounting Threads
Dimensions	
	.04711 in
Product Height	50.8 mm[2 in]
Identification Marking	
Stamped Marking Type	International I/O
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant

China RoHS 2 Directive MIIT Order No 32 2016

Restricted Materials Above Threshold

China Rons 2 Directive Mint Order No 32, 2010	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Cadmium oxide (7.95% in Component part) Aticle Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

W67-X2Q110-20

Circuit Breakers, Magnetic, Series Trip, White, Operating Voltage 415 VAC / 240 VAC, 20A Current Rating, 1 Pole, Potter & Brumfield W6




requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



TE Part # 5-1393252-8 W67-X2Q12-20=M6/M7/M9/W6/W7



TE Part # 8-1393252-4 W67-X2Q52-20=M6/M7/M9/W6/W7



TE Part # 175022-1 250 PL EX REC. 18-14AWG PTBR




TE Part # 6-1393252-9 W67-X2Q13-20=M6/M7/M9/W6/W7

Also in the Series | Potter & Brumfield W6



Circuit Breakers(70)


Customers Also Bought

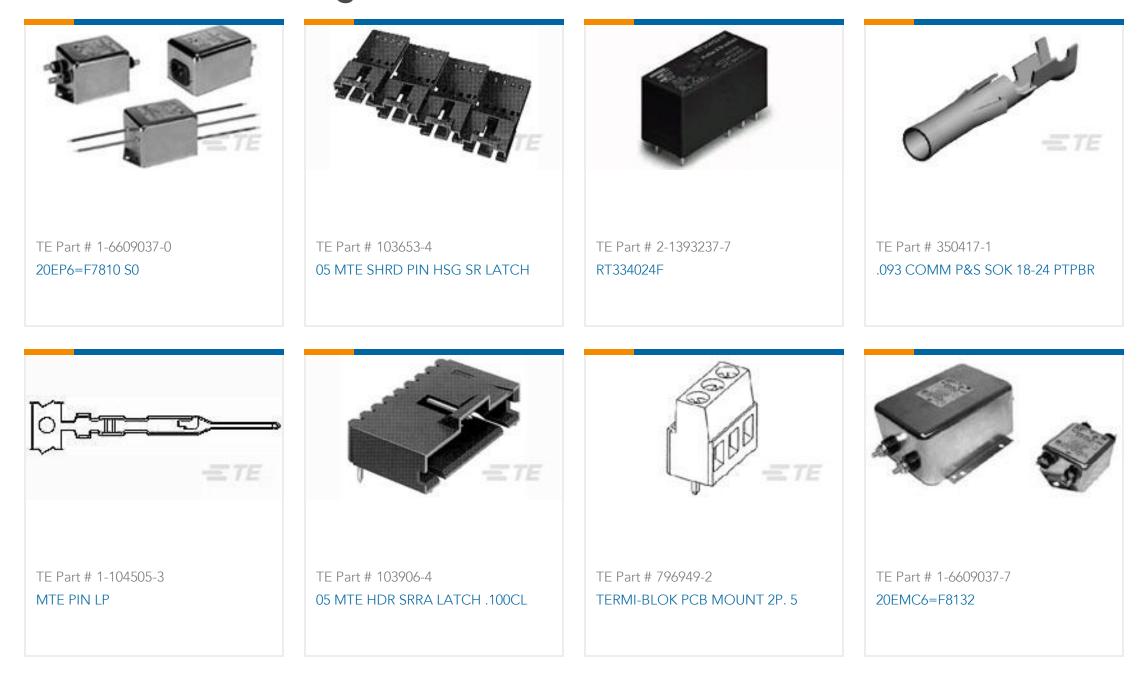

W67-X2Q110-20

Circuit Breakers, Magnetic, Series Trip, White, Operating Voltage 415 VAC / 240 VAC, 20A Current Rating, 1 Pole, Potter & Brumfield W6



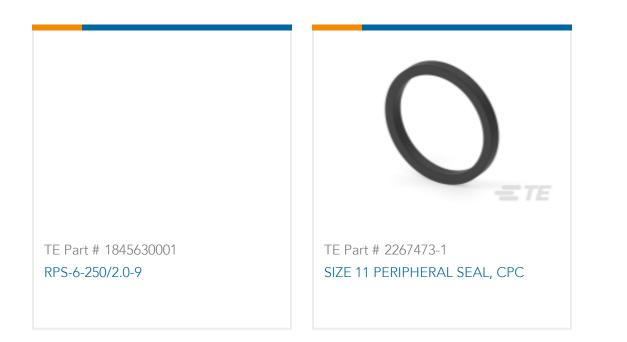

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_4-1393252-3_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_4-1393252-3_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_4-1393252-3_C.3d_stp.zip

English

Customer View Model ENG_CVM_4-1393252-3_1106.3d_igs.zip

English

Customer View Model

ENG_CVM_4-1393252-3_1106.3d_stp.zip

English

Customer View Model

ENG_CVM_4-1393252-3_1106.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Datasheets & Catalog Pages W6/W9 Magnetic Hydraulic Circuit Breaker

English

Agency Approvals UL

English