

Main

Range	Linergy
Product name	FT
Device short name	GV2G
Product or Component Type	Comb busbar
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys D TeSys GV2 TeSys K TeSys U
Number of tap-offs	4
[I _{th}] conventional free air thermal current	63 A
Connection pitch	2.83 in (72 mm)

Complementary

Mounting Location	On terminal
[Ui] Rated Insulation Voltage	690 V
Length	10.24 in (260 mm)
Net Weight	0.21 lb(US) (0.094 kg)




Ordering and shipping details

Category	US10I1122367
Discount Schedule	0I11
GTIN	3389110555868
Returnability	No
Country of origin	FR

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.47 in (1.2 cm)
Package 1 Width	1.26 in (3.2 cm)
Package 1 Length	10.24 in (26 cm)
Package 1 Weight	3.88 oz (110 g)
Unit Type of Package 2	S01
Number of Units in Package 2	40
Package 2 Height	5.91 in (15 cm)
Package 2 Width	5.91 in (15 cm)
Package 2 Length	15.75 in (40 cm)
Package 2 Weight	9.93 lb(US) (4.502 kg)


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	 REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	 China RoHS Declaration
RoHS exemption information	 Yes
Environmental Disclosure	 Product Environmental Profile
Circularity Profile	 End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------

Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

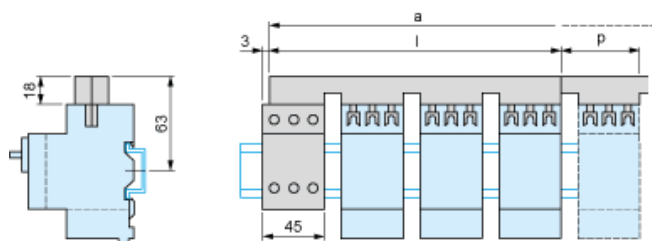

	l		p	
GV2G445 (4 x 45 mm)	179		45	
GV2G454 (4 x 54 mm)	206		54	
GV2G472 (4 x 72 mm)	260		72	

Number of tap-offs	a			
	5	6	7	8
GV2G445	224	269	314	359
GV2G454	260	314	368	422
GV2G472	332	404	476	548