


Product data sheet

Characteristics

QON124L200PDL

Load center interior, QO, mounting base,
1 phase, 24 spaces, 200A main lugs, PoN,
double lugs, OEM

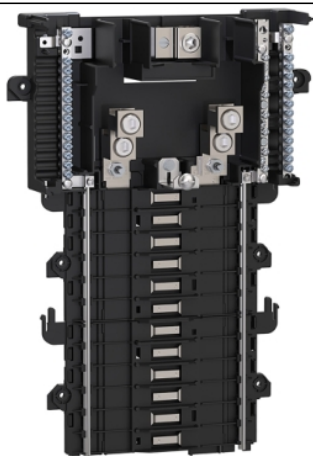

Main

Product Type	Mounting base
Marketing Trade Name	QO
Load Center Type	PoN Convertible Mains (lugs)
Rated Current	200 A
Number of Spaces	24
Max Short Circuit Current Rating	10 kA
Number of Phases	1 phase
Voltage Rating	120/240 V AC

Complementary

Wire Size	AWG 4...250 kcmil aluminium/copper
Wiring Configuration	3-wire
Height	15.12 in (384 mm)
Width	10.63 in (270 mm)
Depth	2.60 in (66 mm)
Net Weight	3.00 lb(US) (1.361 kg)

Environment

Ambient Air Temperature for Operation	23 °F (-5 °C) 104 °F (40 °C)
---------------------------------------	---------------------------------

Ordering and shipping details

Category	US1DE3A00909
Discount Schedule	DE3A
GTIN	785901453383
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.12 in (38.4 cm)
Package 1 Width	10.63 in (27.0 cm)
Package 1 Length	2.68 in (6.8 cm)
Package 1 Weight	1.97 oz (55.792 g)

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
China RoHS Regulation	China RoHS Declaration
RoHS exemption information	Yes