



Connector Location A

Connector Location B

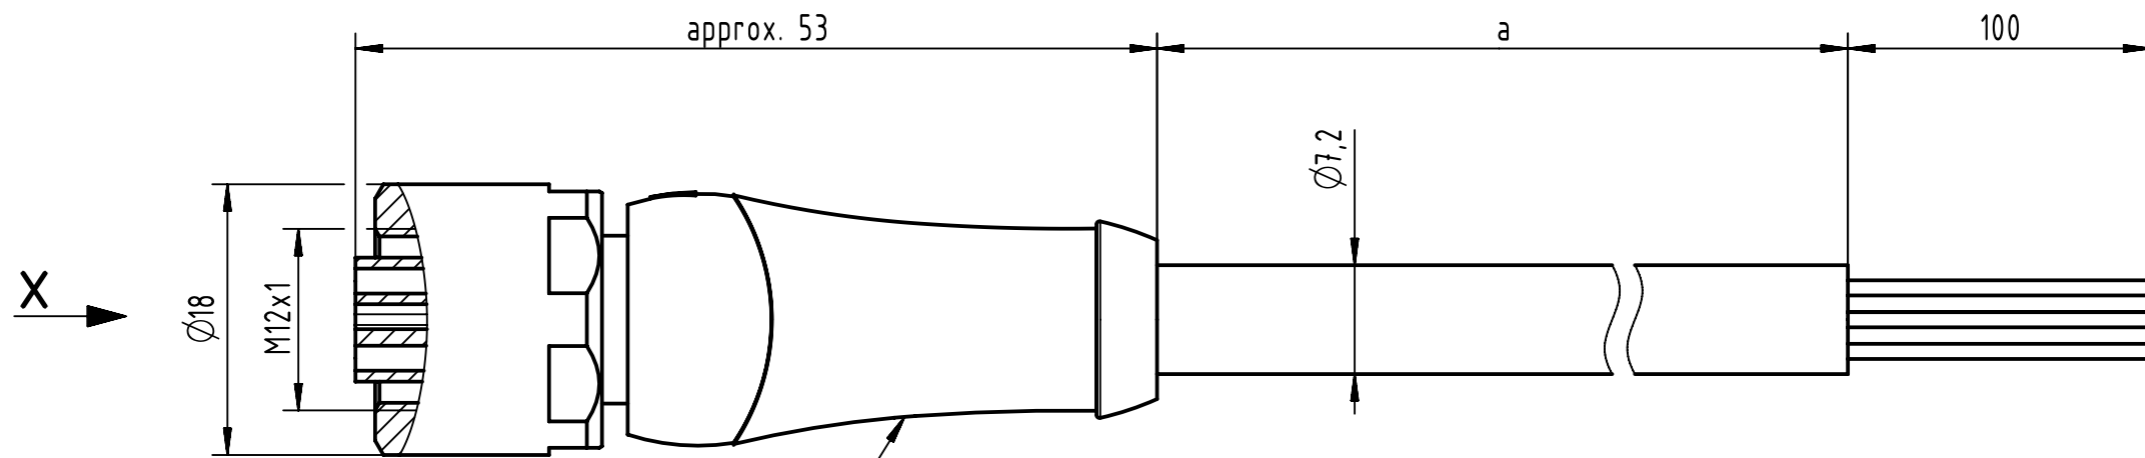


M12 S-cod 3+PE straight overmolded unshielded

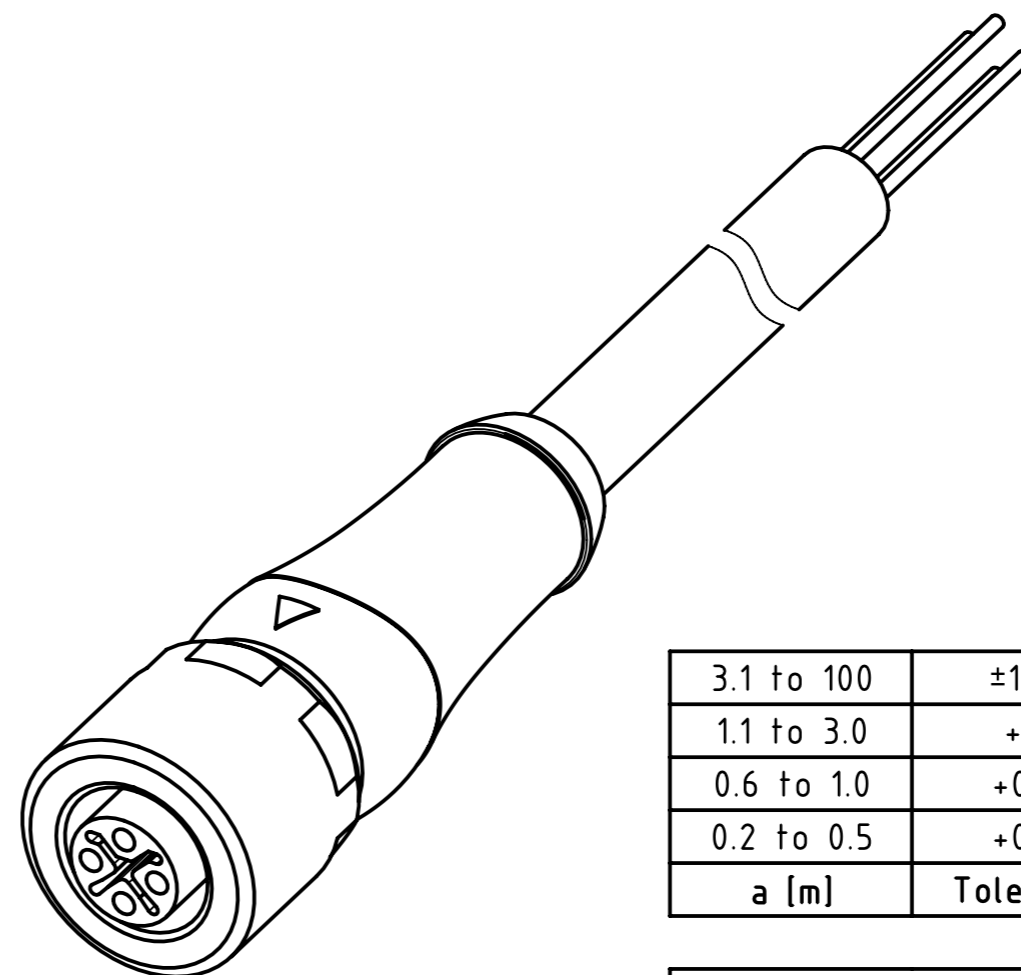

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
	11	XXX=110
length in "0.1m" step	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
Step	0.4	XXX=004
	0.3	XXX=003
Step	0.2	XXX=002
	a [m]	XXX

X female

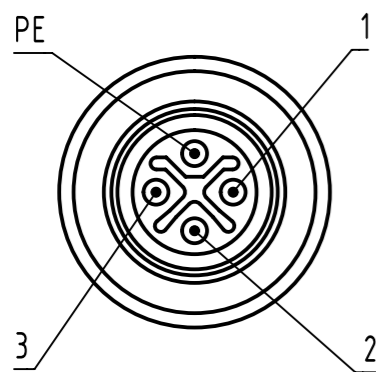

Loading Plan

- 1 brown
- 2 white
- 3 blue
- PE green/yellow

3.1 to 100	±1.5%
1.1 to 3.0	+0.1
0.6 to 1.0	+0.05
0.2 to 0.5	+0.03
a [m]	Tolerance

PUR black 4x1.5mm ²	21343500445XXX
Type of cable	Part no.

- Protection level: IP65/67
 - Temperature range: -25°C ... +80°C

	All rights reserved Department HCS - RO	Created by 407576 Stoica	Inspected by COSTEA Costea	Standardisation BANCIUD Banciu	Date 2023-11-08	State Final Release	Doc-Key / ECM-Nr. 100958248/UGD/001/C 50000256959
HARTING Customised Solutions D-32339 Espelkamp		Title M12 S-cod 3+PE st/- f/- PUR		Type TB		Number 21343500445XXX	
						Rev. C	Page 1/1