

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948

<https://www.phoenixcontact.com/us/products/1095948>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 5-position, PVC, gray, shielded (Plastic-coated aluminum foil connection with a drain wire), Plug straight M12, coding: A, on free cable end, cable length: 15 m, Foil shielding plus drain wire

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 1095948 |
| Packing unit | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | BF13 |
| Product key | BF1IEC |
| GTIN | 4055626928999 |
| Weight per piece (including packing) | 22.22 g |
| Weight per piece (excluding packing) | 22.22 g |
| Country of origin | US |

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948

<https://www.phoenixcontact.com/us/products/1095948>

Technical data

Product properties

| | |
|----------------------|-----------------------|
| Product type | Sensor/actuator cable |
| Application | Standard, U.S. cables |
| Number of positions | 5 |
| No. of cable outlets | 1 |
| Shielded | yes |
| Coding | A |

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 3 |

Material specifications

| | |
|----------------------------------------|---------------------------------------------|
| Flammability rating according to UL 94 | HB |
| Material of grip body | TPU, hardly inflammable, self-extinguishing |
| Contact material | CuSn |
| Contact surface material | Ni/Au |
| Contact carrier material | TPU GF |
| Material for screw connection | Zinc die-cast, nickel-plated |

Electrical properties

| | |
|-----------------------|----------------------------|
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage U_N | 48 V AC |
| | 60 V DC |
| Nominal current I_N | 4 A |

Mechanical properties

Mechanical data

| | |
|-----------------------------|------------|
| Insertion/withdrawal cycles | ≥ 100 |
|-----------------------------|------------|

Signaling

| | |
|------------------------|----|
| Status display | No |
| Status display present | No |

Connection data

Conductor connection

| | |
|-------------------|------------------------|
| Tightening torque | 0.4 Nm (M12 connector) |
|-------------------|------------------------|

Connector

Connection 1

| | |
|------|-------------------|
| Type | Plug straight M12 |
|------|-------------------|

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948

<https://www.phoenixcontact.com/us/products/1095948>

| | |
|-------------|---|
| Coding type | A |
|-------------|---|


Connection 2

| | |
|------|----------------|
| Type | free cable end |
|------|----------------|

Cable/line

| | |
|--------------|------|
| Cable length | 15 m |
|--------------|------|

PVC, gray, 105°C [680]

| | |
|-----------------------------------------------|------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Cable weight | 46.03 kg/km |
| UL AWM Style | 2517 (105 °C / 300 V) |
| Number of positions | 5 |
| Shielded | yes |
| Cable type | PVC, gray, 105°C [680] |
| AWG signal line | 22 |
| Wire diameter incl. insulation | 1.27 mm ±0.03 mm |
| External cable diameter | 5.44 mm ±0.2 mm |
| Outer sheath, material | PVC |
| External sheath, color | gray |
| Conductor material | Tin-plated Cu litz wires |
| Material wire insulation | PVC (Signal line) |
| Single wire, color | brown, white, blue, black, gray |
| Type of pair shielding | Plastic-coated aluminum foil, aluminum side inside |
| Overall twist | Conductors, fillers, and drain wire are twisted with left-hand lay |
| Max. conductor resistance | max. 51.1 Ω/km (20 °C) |
| Insulation resistance | ≥ (550 M Ohms/m @ 500V) |
| Nominal voltage, cable | 300 V |
| Minimum bending radius, flexible installation | 8 x D |
| Smallest bending radius, movable installation | 44 mm |
| Flame resistance | FT4 |
| Other resistance | UV resistant |
| Special properties | UL standards PLTC and ITC |
| Ambient temperature (operation) | -30 °C ... 105 °C (cable, fixed installation) |

Environmental and real-life conditions

Ambient conditions

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948
<https://www.phoenixcontact.com/us/products/1095948>

| | |
|---------------------------------|------------------------------------------------|
| Degree of protection | IP65 |
| | IP67 |
| | IP68 |
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| | -40 °C ... 80 °C (cable, fixed installation) |
| | -5 °C ... 80 °C (Cable, flexible installation) |

Standards and regulations

| | |
|--------------------------|-----------------|
| Standard designation | M12 connector |
| Standards/specifications | IEC 61076-2-101 |

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable




1095948


<https://www.phoenixcontact.com/us/products/1095948>

Drawings

Circuit diagram

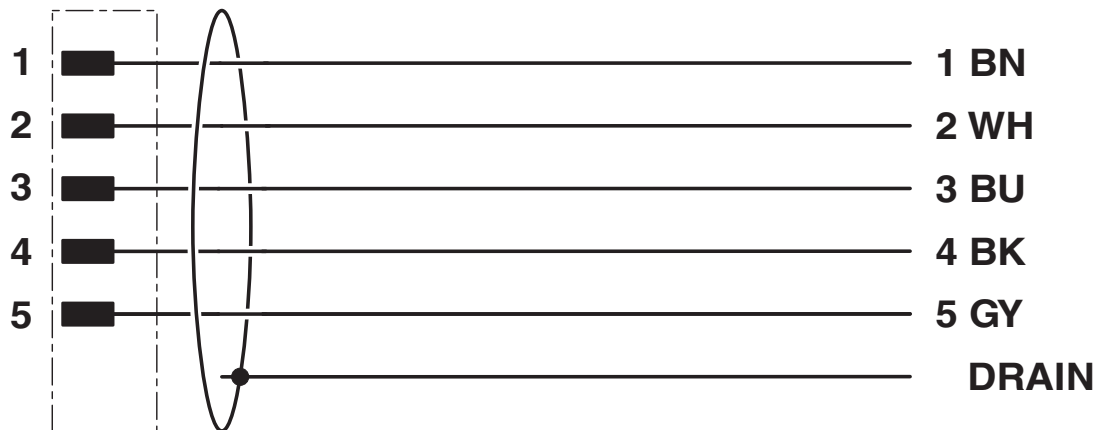

Dimensional drawing

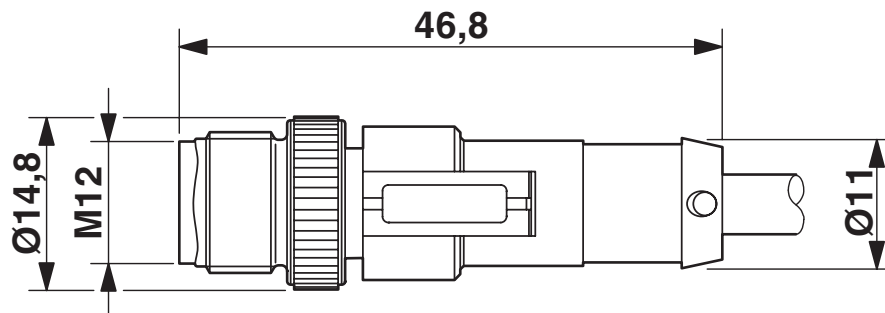


Plug, M12 x 1, straight

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable

1095948

<https://www.phoenixcontact.com/us/products/1095948>

Schematic diagram

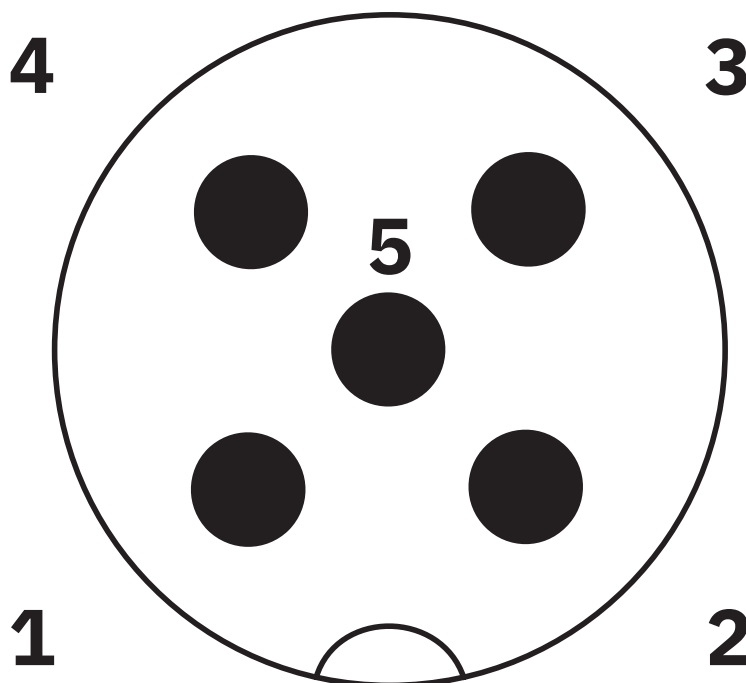

Pin assignment M12 male connector, 5-pos., A-coded, male side

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948
<https://www.phoenixcontact.com/us/products/1095948>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1095948>

| | | | | |
|--|------------------------------------------------|--------------------------------|-------------------|-------------------------------|
| | UL Listed Approval ID: FILE E 221474 | | | |
| | Nominal voltage U _N | Nominal current I _N | Cross section AWG | Cross section mm ² |
| | 125 V | 4 A | - | - |

| | | | | |
|--|-------------------------------------------------|--------------------------------|-------------------|-------------------------------|
| | cUL Listed Approval ID: FILE E 221474 | | | |
| | Nominal voltage U _N | Nominal current I _N | Cross section AWG | Cross section mm ² |
| | 125 V | 4 A | - | - |

| |
|---------------------|
| cULus Listed |
|---------------------|

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948
<https://www.phoenixcontact.com/us/products/1095948>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27060311 |
| ECLASS-12.0 | 27060311 |
| ECLASS-13.0 | 27060311 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31251501 |
|-------------|----------|

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948
<https://www.phoenixcontact.com/us/products/1095948>

Environmental product compliance

| | |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948

<https://www.phoenixcontact.com/us/products/1095948>

Accessories

PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

<https://www.phoenixcontact.com/us/products/1430873>

M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs



SAC-M12-EXCLIP-M - Locking clip

1558988

<https://www.phoenixcontact.com/us/products/1558988>

Locking clip for the pin side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948

<https://www.phoenixcontact.com/us/products/1095948>

PROT-M12 MS-PA-CHAIN - Screw plug

1430899

<https://www.phoenixcontact.com/us/products/1430899>

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



SAC-M12-EXCLIP-F - Locking clip

1558991

<https://www.phoenixcontact.com/us/products/1558991>

Locking clip for the socket side of sensor/actuator cables with M12 connector and M12 connectors for assembly, for knurl diameter: 15 mm or for Allen key with a wrench size of 14 mm, prevents the disconnection of plug-in connections without tools



SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948

<https://www.phoenixcontact.com/us/products/1095948>

TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/us/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/us/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

SAC-5P-M12MS/15,0-680 FDN - Sensor/actuator cable



1095948

<https://www.phoenixcontact.com/us/products/1095948>

TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/us/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/us/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com