
1-2273107-5 - ACTIVE

TE Internal #: 1-2273107-5 M12 Cable Assembly, 4 Position, 2 m, Sensor/Actuator, Code A, M12 Plug, M12 Socket, Double Ended, Plastic View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies > M12 A-Code Y-Cable Assembly

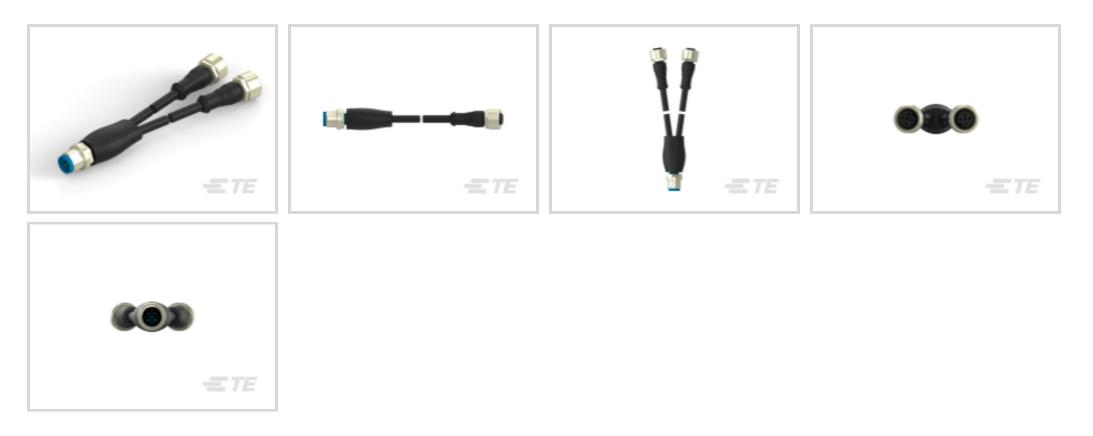

M8/M12 Application Type: Sensor/Actuator

Number of Positions: 4

Connector & Keying Code: A

Connector Type (End A): M12 Plug

Connector Type (End B): M12 Socket

All M12 A-Code Y-Cable Assembly (10)

### Features

### Product Type Features

| Connector Type (End A)     | M12 Plug                  |
|----------------------------|---------------------------|
| Connector Type (End B)     | M12 Socket                |
| Cable Assembly Type        | M12                       |
| Configuration Features     |                           |
| Number of Positions        | 4                         |
| Electrical Characteristics |                           |
| Operating Voltage          | 250 VAC                   |
| Body Features              |                           |
| Cable Color                | Black                     |
| Connector Color (End B)    | Black                     |
| Connector Color (End A)    | Black                     |
| Jacket Material            | PVC                       |
| Wire Color (Base)          | Brown, White, Blue, Black |

## 1-2273107-5

M12 Cable Assembly, 4 Position, 2 m, Sensor/Actuator, Code A, M12 Plug, M12 Socket, Double Ended, Plastic



| Connector & Keying Code       | A                         |
|-------------------------------|---------------------------|
| Contact Features              |                           |
| Contact Current Rating (Max)  | 4 A                       |
| Mechanical Attachment         |                           |
| Thread Size                   | M12                       |
| Connector Orientation (End A) | Straight                  |
| Connector Orientation (End B) | Straight                  |
| Housing Features              |                           |
| Housing Material              | Plastic                   |
| Dimensions                    |                           |
| Outside Cable Diameter        | 4.9 mm[.192 in]           |
| Wire Size                     | .326 mm <sup>2</sup>      |
| Usage Conditions              |                           |
| Operating Temperature Range   | -30 – 80 °C[-22 – 176 °F] |
| Operation/Application         |                           |
| M8/M12 Application Type       | Sensor/Actuator           |
| Shielded                      | No                        |

## Packaging Features

| Packaging Method             | Box          |
|------------------------------|--------------|
| Other                        |              |
| Field Serviceable            | Yes          |
| Cable Assembly Length        | 2 m          |
| Cable Assembly Configuration | Double Ended |

# Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant  |
|---|--|
| EU ELV Directive 2000/53/EC                   | Compliant  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2024<br>(240)<br>Candidate List Declared Against: JAN 2022<br>(223) |

## 1-2273107-5

M12 Cable Assembly, 4 Position, 2 m, Sensor/Actuator, Code A, M12 Plug, M12 Socket, Double Ended, Plastic



Does not contain REACH SVHC

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Halogen Content

Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



# **Customers Also Bought**



## Documents

Product Drawings M12 Y conn Male to 2xM12 Female A

English

### **CAD** Files

3D PDF

3D

## 1-2273107-5

M12 Cable Assembly, 4 Position, 2 m, Sensor/Actuator, Code A, M12 Plug, M12 Socket, Double Ended, Plastic



Customer View Model

ENG\_CVM\_CVM\_1-2273107-5\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-2273107-5\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-2273107-5\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

English

Product Specifications Product Specification

English