50-00959


2

3

Sheet 1 of 1

white

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00952	Connector, 4 pin M12 A-code socket, 12xL22mm, gold plated, molding style, solder cup, IP67	1	
2	50-00959	Connector, 4 pin M12 A-code plug, 12xL22mm, gold plated, molding style, solder cup, IP67	1	
3	30-01658	Wire, 4C TS, 22 AWG, UL20387, 300V, 105C, 60C oil, UV, 5.6 mm, VW-1, PVC, 80A, black	1	
4	24-00349	Overmold, M12 plug and jack, 180°	2	PVC, black

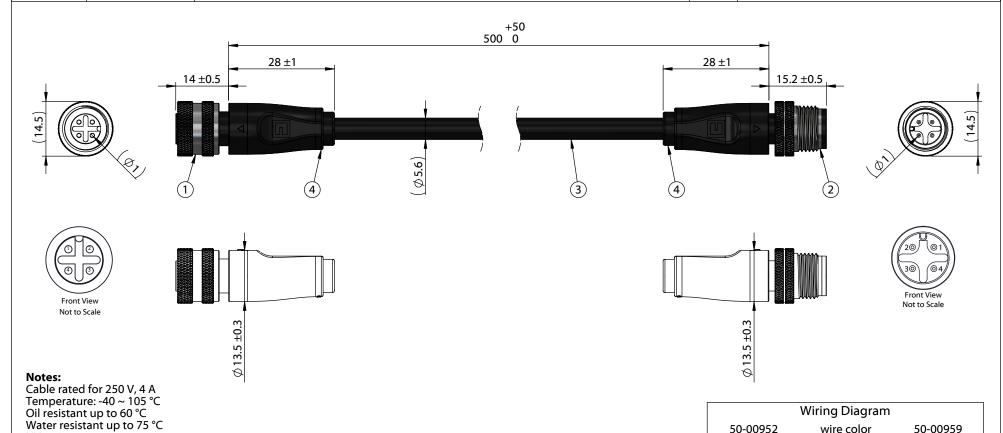

Water resistant up to 75 °C UV resistant	50-00952	wire color
ov resistant	1	red
IP67 waterproof rating when mated with corresponding	2	yellow
(IP67) connector	3	black

Functionally equivalent components may be substituted

5

Revision:	Date:	Description:	Prepared:	Notes:					
A 1	12/29/2021	Initial release		RoHS compliant		TENSILITY			
			Verified: Dimensions are in	Function test: no open, no short circuit, no intermittent	tel 1.541.323.3228 800 877.670 fax 1.541.323.4202 web tensility.			877.670.7118	
			millimeters. Tolerances: X: ± 0.5 mm	Description: Colerances: (: ± 0.5 mm (.X: ± 0.3 mm Description: Cable, 500 mm, 1.0 mm 4C 50-00952 M12 socket to 1.0 mm 50-00959 M12 plug, 22 AWG, 30-01658 wire	Size:	: Part number: 10-04515			
			X.X: ± 0.3 mm X.XX: ± 0.05 mm		Scale:	1:1		Sheet 1 of	

3 2