



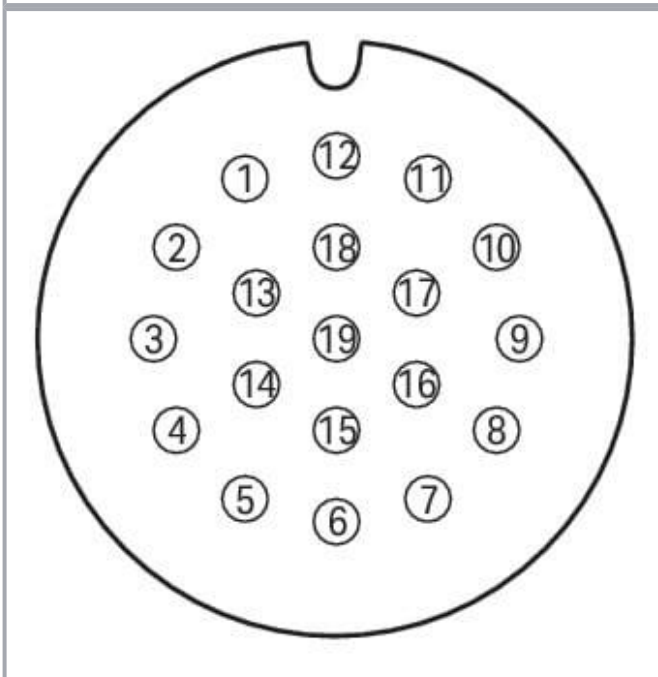

Pin 6, 12, 19: 1,00 mm²;
Pin 1 - 5, 7 - 11, 13 - 19: 0,34 mm²

1	violett	11	schwarz
2	rot	12	grün-gelb
3	grau	13	gelb-braun
4	rot-blau	14	braun-grün
5	grün	15	weiß
6	blau	16	gelb
7	grau-rosa	17	rosa
8	weiß-grün	18	grau-braun
9	weiß-gelb	19	braun
10	weiß-grau		

Subject to changes. Please also observe the further product documentation!

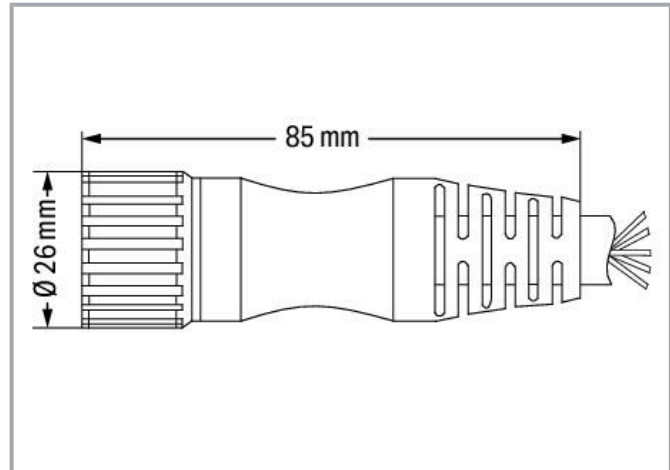

Data

Technical data

Connection type	M23 socket - free end
Pole number	19
Cable connection direction to mating direction	0 °
Cable length	5 m
Operating voltage	≤ 300 V
Operating current	8 A
Operating current	10 mm ² 1 A
Rated surge voltage	≥ 2.0 kV rms

Mechanical data

Bending cycles	2 Mio.
Drag chain capability	yes
Sheathed cable diameter	11.3 ... 11.9 mm
Weight	748 g
Color	black

Environmental requirements

Ambient (operating) temperature (dynamic)	-25 ... +80 °C
Ambient (operating) temperature (static)	-40 ... +90 °C
Protection type	IP67

Commercial data

Product Group	23 (I/O passive and accessories)
eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
ECCN	NO DATA
PU (SPU)	1 pcs
Packaging type	box
Country of origin	DE
GTIN	4044918569040
Customs tariff number	85444290900

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Downloads
Documentation

System Description

Sensor/Actuator Boxes – General Product Information	pdf 438.6 kB	Download
---	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-3203/190-050	URL	Download
WSCAD Universe 756-3203/190-050	URL	Download

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-3203/190-050 Connecting cable; 19-pole; Length: 5 m	URL	Download
---	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!