



Data sheet | Item number: 756-5404/040-010

Sensor/Actuator cable; M12A socket; angled; M12A plug; angled; 4-pole;
Length: 1 m

www.wago.com/756-5404/040-010



 Picture differs from the item.

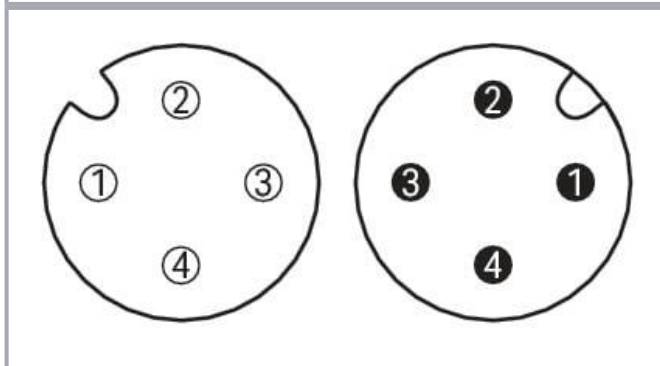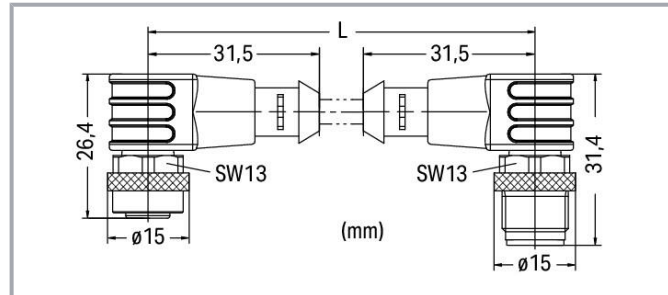

Pin 1 ... 4: 0.34 mm²

1	brown	1
2	white	2
3	blue	3
4	black	4

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Data****Technical data****General information**

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	1.5 kV
Insulation resistance	$>10^9 \Omega$
Contact resistance	10 m Ω
Conductor resistance	$\leq 60 \Omega/\text{km}$
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Drag chain compatible

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	1 m
Type code	LiF9YH-11YH or LiF9YC11YFHF
Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	4.5 ... 4.9 mm

Connector

Connection type	M12 Socket - M12 plug
-----------------	-----------------------

Subject to changes. Please also observe the further product documentation!



Pole number	4
Cable connection direction to mating direction	90 °
Cable connection direction to mating direction (2)	90 °
Connector interface coding (cable/adaptor) 1 1	A-coded
Connector interface coding (cable/adaptor) 2 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
ECCN	NO DATA
PU (SPU)	10 (1) pcs
Packaging type	Box
Country of origin	HU
GTIN	4044918975582
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant, With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	9f2c0cf0-b4cf-4816-9d2b-28adfd222cc4
SCIP notification number (Belgium)	e0cf6d9f-c84d-44a3-9eb3-06928e19aebc
SCIP notification number (Bulgaria)	638f59fa-cb6a-48b8-89f3-7854601a5dd3
SCIP notification number (Czech Republic)	180ba053-8535-4c18-a32b-93f690dc7786
SCIP notification number (Denmark)	feffc341f-a8e1-46a6-a499-a52af47a5e1b
SCIP notification number (Finland)	f6580a0f-1c65-4f7e-983c-559c21503ded
SCIP notification number (France)	21e69472-176c-46d7-b81e-8eeb1475f1b5
SCIP notification number (Germany)	95602137-7703-47e1-a8e5-39e5bc7ac7f3
SCIP notification number (Hungary)	3f9c6772-4520-46d9-90b2-882f77554480
SCIP notification number (Italy)	9bc59a38-2ee6-4e3a-b038-ade99391389d
SCIP notification number (Netherlands)	42924365-ffb8-42bb-919b-af5cf9775268

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (Poland)	ebcd2143-263b-4dc1-ae5b-dcdbc1d51b8c
SCIP notification number (Romania)	23322b14-7dbc-4210-a891-d6f5f7ae97c9
SCIP notification number (Sweden)	bdbf3d2c-541b-4625-a3ff-1152b0da5e35

Commercial data

eCl@ss 9.0
ETIM 8.0
ETIM 7.0
Customs tariff number

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5404/040-010 X81 - Datei	2019 年2月19 日	xml 3.3 kB	Download
756-5404/040-010 doc - Datei	2017 年9月20 日	doc 27.1 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 130.8 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5404/040-010	URL	Download
---------------------------------	-----	----------

Subject to changes. Please also observe the further product documentation!



WSCAD Universe 756-5404/040-010

[URL](#) [Download](#)

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5404/040-010	URL	Download
Sensor/Actuator cable; M12A socket; angled; M12A plug; angled; 4-pole; Length: 1 m		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.