



Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



Operating Temperature (Max): 150 °C
Expanded Inside Diameter (Min): 3.05 mm [.12 in]
Recovered Inside Diameter (Max): 1.78 mm [.07 in]
Pre-Installed Lead: No
Wire Temperature (Max): 150 °C

Features

Product Type Features

| | |
|---------------------------------|--------------|
| Interconnect Device Splice Type | SolderSleeve |
| Temperature Indicator | No |
| Temperature Indicator Type | None |

Configuration Features

| | |
|--------------------|----|
| Pre-Installed Lead | No |
|--------------------|----|

Dimensions

| | |
|---------------------------------|-----------------|
| Expanded Inside Diameter (Min) | 3.05 mm[.12 in] |
| Recovered Inside Diameter (Max) | 1.78 mm[.07 in] |

Usage Conditions

| | |
|-----------------------------|--------|
| Operating Temperature (Max) | 150 °C |
| Wire Temperature (Max) | 150 °C |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|--------------------------------------|
| EU RoHS Directive 2011/65/EU | Not Compliant |
| EU ELV Directive 2000/53/EC | Not Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | |



Current ECHA Candidate List: JAN 2024
(240)
Candidate List Declared Against: JAN 2024
(240)
SVHC > Threshold:
Pb (37% in Solder)
Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

| | |
|---------------------------|--|
| Halogen Content | Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Also in the Series | RAYCHEM Soldersleeve Device for Space Applications

SolderSleeve Shield Terminators(3)

Customers Also Bought

TE Part #321884
TERM, STRAT,SOLIS, HT, 22-16, #4

TE Part #322797
SOLIS R HR 22-16COM 22-18MIL 6

TE Part #53401-1
TERMINAL,PIDG PVF2 R 26-24 4

TE Part #915879-000
55A1122-24-9/96-9CS2275



TE Part #CW2908-000
R85049/88-9W03




TE Part #EM7794-000
S01-7-R



TE Part #EM7795-000
S01-8-R



TE Part #456329-000
55A6418-20-MST3-9CS2275

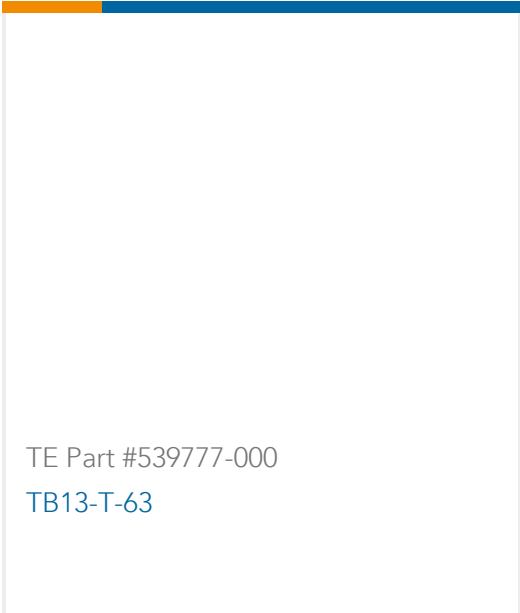

TE Part #539777-000
TB13-T-63

Documents

Product Drawings

S01-6-R

English

Datasheets & Catalog Pages

1654025_Sec8_B-155_CWT_SO63_S01to03_SO96

English

SolderSleeve for Space

English