


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV	ECN NO	DATE	SIGN	DESCRIPTION
C	C201284	2020-08-25	Allen Pan	△C X1
D	C220438	2022-03-21	Ruru	△D X4
E	C230124	2023-02-06	Ruru	△E X4

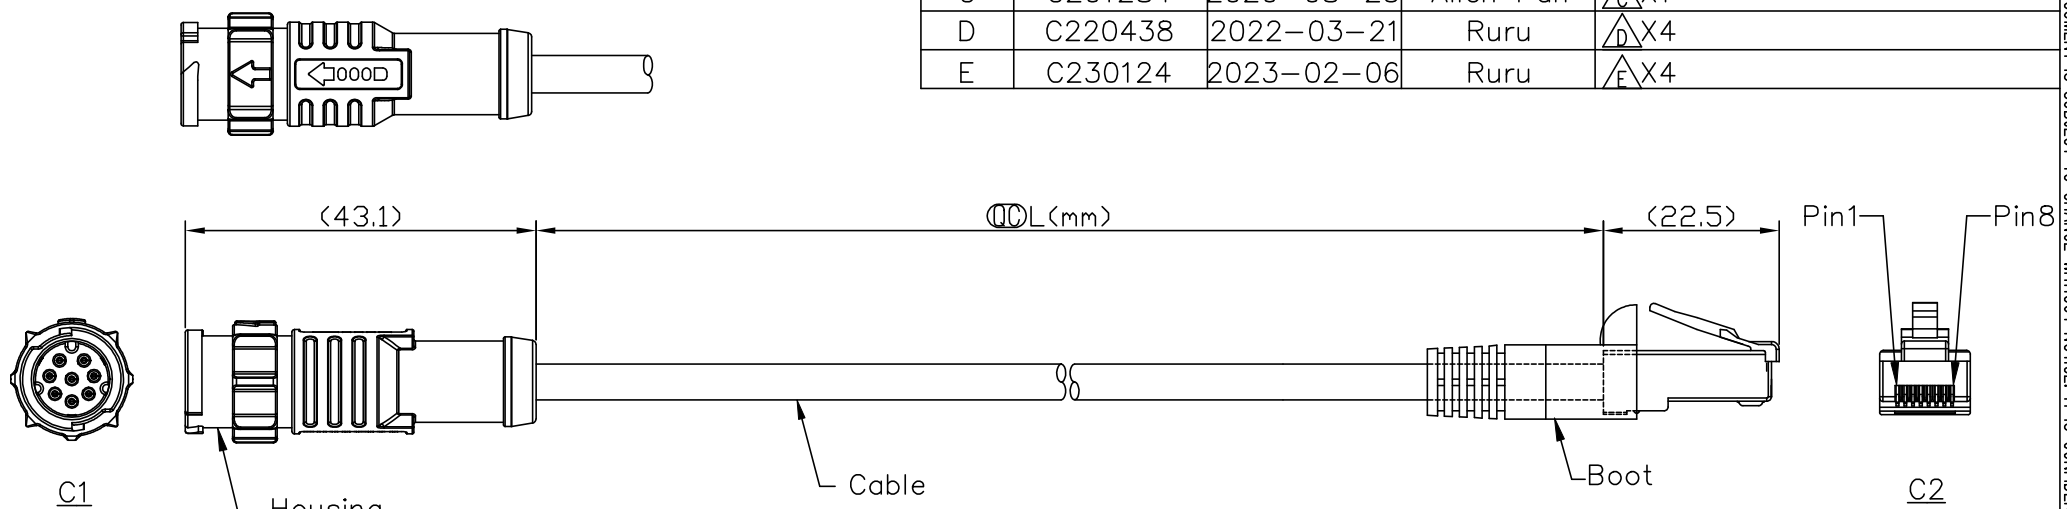


AB-AUXXML-UPBML-QHXXX

△D
XX: No. Of Pin

△B XXX: 0.5~40Meters
A05: 0.5Meter
001: 01Meter
002: 02Meters
:
:
△B040: 40Meters

Note: △D
 * RoHS Compliant
 * (L) Important dimension
 * C1
 △E Waterproof rate: IP68, mated 1m/24h
 Housing: Thermoplastic, Black
 Pin: Copper Alloy, Gold Plated
 Outer mold: Thermoplastic, Black
 * C2
 Waterproof rate: Non-Waterproof
 Plug: RJ45, Shielded
 △C * Cable: CAT-5E, UTP, 24#*4P, OD=6mm, PVC Jacket, Black
 * Cable length tolerance
 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 40M: ±500 mm



C1
Pin Assignments
Front View

△B	△B	△B	△B	
3	Brown	棕	8	Twist 對線
2	White/Brown	白/棕	7	
8	Green	綠	6	Twist 對線
5	White/Green	白/綠	3	
7	Blue	藍	4	Twist 對線
1	White/Blue	白/藍	5	
4	Orange	橘	2	Twist 對線
6	White/Orange	白/橘	1	
C1	Wire Color		C2	

UNIT: mm	
TOLERANCE	±0.5 mm

TITLE ACC, XLOK, A-2A, DB-ENDED MM	
SCALE Free	SHEET 1 OF 1
REV. E	SIZE A4
◎: Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	AB-AUXXML-UPBML-QHXXX △D
CUSTOMER	ALTW

DRAWN BY Allen Pan	DATE 2020-03-16
CHECKED BY Sam Ho	DATE 2020-03-16
APPROVED BY Fred Lee	DATE 2020-03-16