






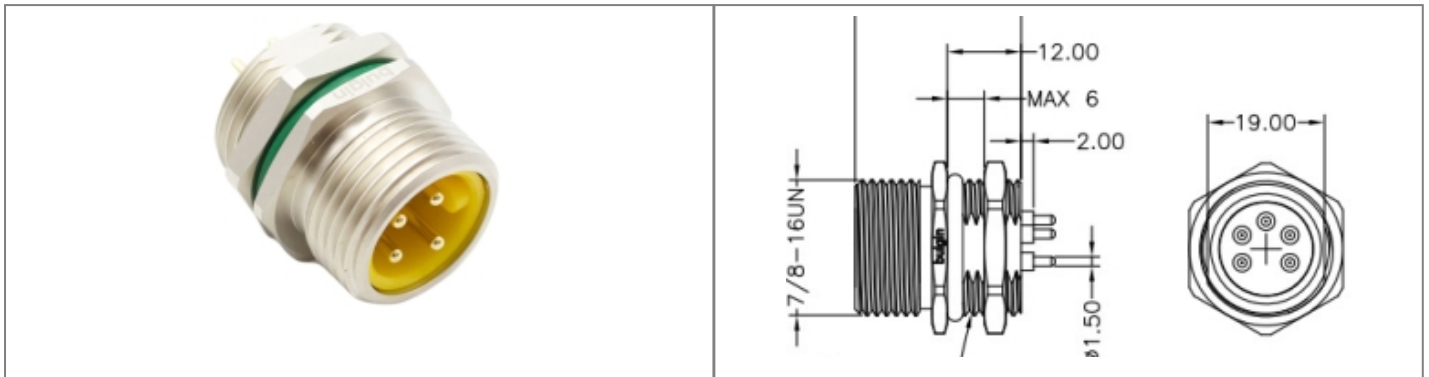

**Product Name // 4 Contacts 7/8" Front Panel Mounting
Male Connector**
 [View Product Page](#)

// Product Description:

-  3 Contacts 7-8" Front Panel Mounting Male Connector
-  IP67 rated when mated
-  Mechanical Cycles >100
-  Operating Temperature -25°C to +85°C
-  Rated Voltage 300 V
-  ROHS compliance

// General Information:

| | |
|----------------------------|--|
| Product Display Title: | 7/8" Front Panel Mounting Male Connector |
| Product Family: | Circular Automation Connectors |
| Product Series: | 7/8" Series |
| Connection Method: | PCB |
| Contact Pin Material: | Brass gold plated 1u" |
| Contact Type: | Plug Contact |
| Current Max: | 9A |
| Durability: | >100 Cycles |
| Function: | Front Panel Mounting Male Connector |
| Insulation Resistance: | >100MOhm |
| Ip Rating: | IP67 |
| Max Operating Temperature: | +85°C |
| Min Operating Temperature: | -25°C |
| Max Panel Thickness: | 6.0mm |
| Number Of Contacts: | 4 Contacts |
| Panel Cut Out: | 22.20mmx19.20mm |
| Pcb Thickness: | >2.5mm |
| Pin Layout Code: | A Code |
| Rohs Compliant: | Yes |
| Thread Size: | 7/8-16UN |
| Voltage Max: | 300V |

// Product PDF Links
 [78 Series Circular connectors...](#)
// Product 3D CAD Model Links
 [PXMBNI78FPM04APC783D CAD Model](#)