





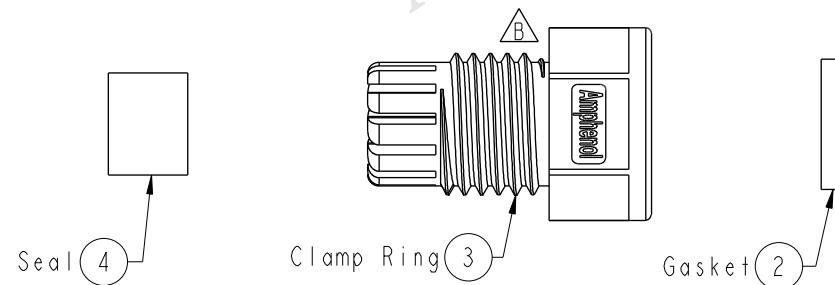


1	2	3	4	5	6	7	8
F	E	D	C	B	A		
				REV. B	ECN NO. LENI4C0417	DATE 2014/12/10	SIGN Vicky
							DESCRIPTION Update Logo & Dimension



Pin Assignments
Front View

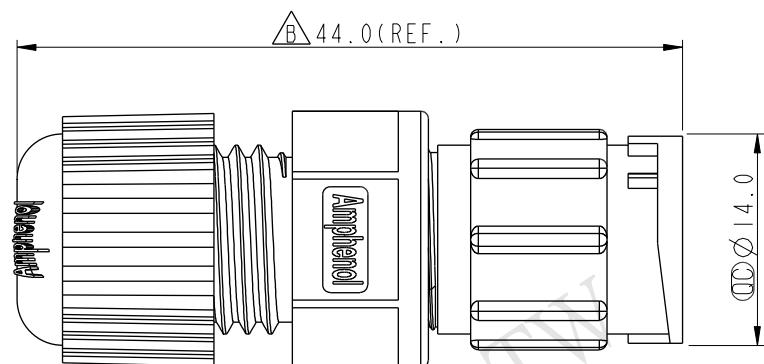

Note:

- * **(QC)** Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Gold Plated
- * Gasket: EPDM, Black
- * Clamp Ring: Nylon, Black
- * Seal: EPDM, Black
- * Sealing Nut: Nylon, Black
- * Seal For Cable OD: Ø 4.5mm~Ø 6.5mm
(防水墊圈線徑: Ø 4.5mm~Ø 6.5mm)
- * One Set Unassembled In One PE Bag
(每一組未組裝, 放置於一個PE袋, 並封口)

UNIT:mm			TITLE Standard, Assy Lock 6Pin M Conn F Pin		
TOLERANCE	.X ±0.25	.XX ±0.1	SCALE 3:2	SIZE A4	SHEET 1 OF 1
.XXX	±0.05		REV. B	WC-REV. A.4	(QC): Inspection item
ANGLES	±1°				

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO BBD-06BMFA-LL7001	DRAWN BY Vicky	DATE 2014-12-10
DWG NO BBD-06BMFA-LL7001	CHECKED BY Sam	DATE 2014-12-10
CUSTOMER ALTW	APPROVED BY Rita	DATE 2014-12-10