
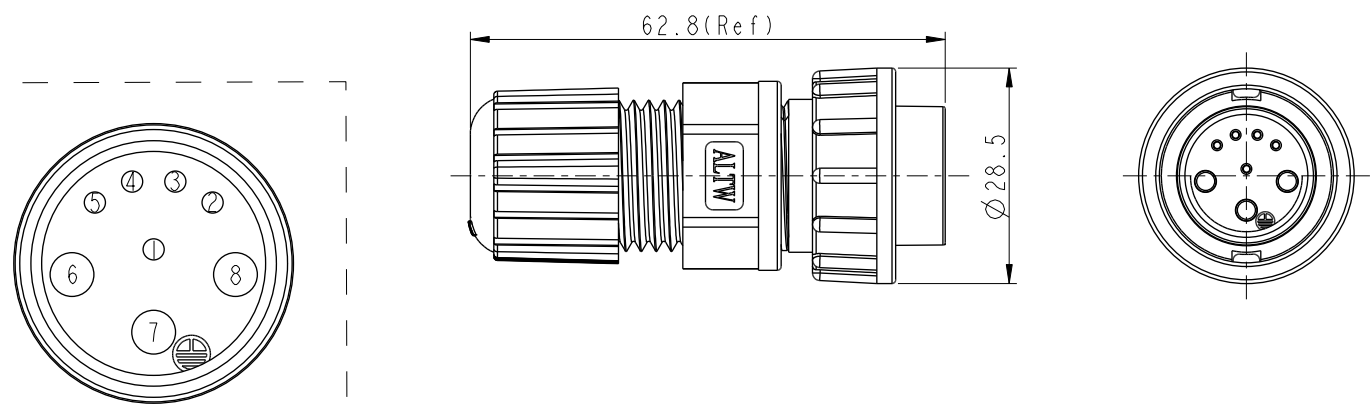


										</					

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LENI350058	2013/04/24	Ruru	Modify Cable OD Max
C	LENI670219	2016/07/18	Joyy	Modify The Color Of The Gasket
D	C231273	2023/10/04	Ruru	△X2

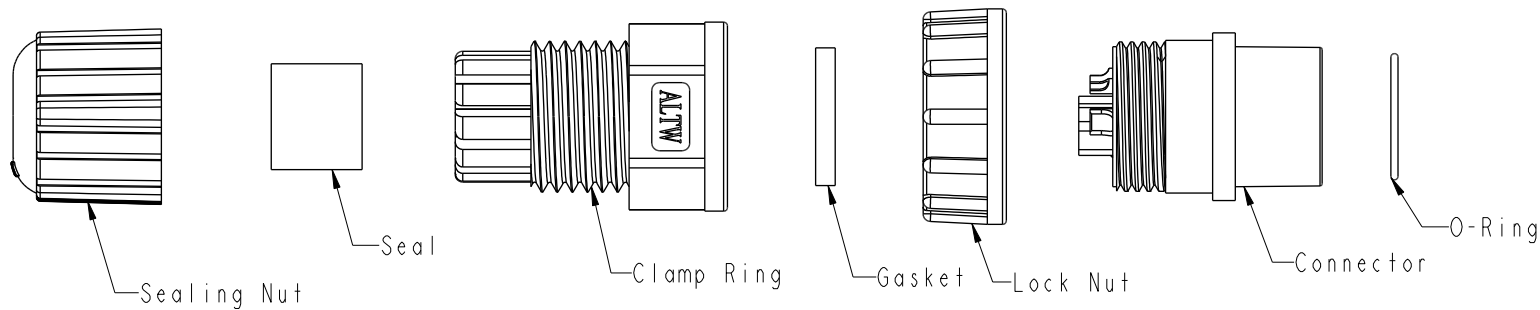

Conn.
Pin Assignments
Front View

- △Note:
- * ⌀ Important Dimension To Check
 - * Waterproof Rate: IP67, Mated
 - * O-Ring: Rubber, Gray
 - * Connector: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Lock Nut: Thermoplastic, Black
 - △ * Gasket: Rubber, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Seal: Rubber, Gray
 - * Sealing Nut: Thermoplastic, Black
 - △ * Cable OD Max: $\varnothing 9.5 \sim \varnothing 10.8 \text{mm}$
 - * One set unassembled in one pe bag

UNIT:mm		TOLERANCE		TITLE				ITEM NO		DRAWN BY		DATE	
				O CERES, D-20A+2A, 08P, CABLE W/O SR				DCU-08BFEA-LL7001		Joyy		2016-07-18	
				F, M PWR+F SIG, FI SOLDER, 2LOCK △				DWG NO		CHECKED BY		DATE	
								DCU-08BFEA-LL7001		Ma Fei		2016-07-18	
								CUSTOMER		APPROVED BY		DATE	
								ALTW		Joyy		2016-07-18	

SCALE	1:1	SIZE	A4	SHEET	1	OF	1
REV.	D	WC-REV.	B.3	QC:Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司