T4145015081-002 - ACTIVE

M12 Connector

TE Internal #: T4145015081-002 Standard Circular Connectors, Wire-to-Panel, 8 Position, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, M12 Connector

View on TE.com >

Connectors > Circular Connectors > Standard Circular Connectors





Connector Mounting Type: Panel Mount

Number of Positions: 8

Sealable: Yes

Connector & Contact Terminates To: Wire & Cable

Features



Product Type Features

Product Type	Connector Assembly				
Accessory Color	Black				
Assembly Requirement	Factory Assembled				
Assembly Type	Electrical Connector				
Circular Connector Shell Type	Metal-Shell				
Connector Product Type	Connector Assembly				
Connector System	Wire-to-Panel				
Sealable	Yes				
Connector & Contact Terminates To	Wire & Cable				
Circular Connector Type	Receptacle				
Shell Type	Metal				
Configuration Features					
Keying & Polarized Position Locations	0				
Number of Positions	8				

Standard Circular Connectors, Wire-to-Panel, 8 Position, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, M12 Connector



Number of Power Positions	0				
Number of Signal Positions	8				
Contacts Preloaded	Yes				
Electrical Characteristics					
Operating Voltage	30 VAC				
Voltage	30 Vrms				
Body Features					
Peripheral Seal Material	Silicone				
Environmental Protection	IP67				
Weight	11.94 g[.026 lb]				
O-Ring Material	Silicone				
Environmental Protection Type	Elastomer Sealed				
Shell Plating Material	Nickel				
Shell Base Material	Copper Alloy				
Circular Connector Insulation Material Type	Polyamide GF				
Hermetically Sealed	Yes				
Contact Features					

Contact reatures

Contact Current Rating (Max)	2 A			
Reverse Gender	Yes			
Circular Connector Contact Type	Socket			
Mechanical Attachment				
Connector Mounting Type	Panel Mount			
Polarization Code	A			
Mating Alignment Type	Keyed			
Housing Features				
Circular Connector Shell Size	18			
Usage Conditions				
IP Dust Sealing Level	6			
IP Water Sealing Level	7			
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]			
Operation/Application				
Circuit Application	Signal			

Standard Circular Connectors, Wire-to-Panel, 8 Position, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, M12 Connector



Shielded	No	
Industry Standards		
UL Flammability Rating	UL 94HB	
Packaging Features		
Packaging Quantity	120	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant with Exemptions	
EU ELV Directive 2000/53/EC	Compliant with Exemptions	
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Db (4% in Pb-Alloy in Copper) Atile Safe Usage Statements Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.	

Not Low Halogen - contains Br or Cl > 900

ppm.

Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | M12 Connector

Standard Circular Connectors, Wire-to-Panel, 8 Position, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, M12 Connector



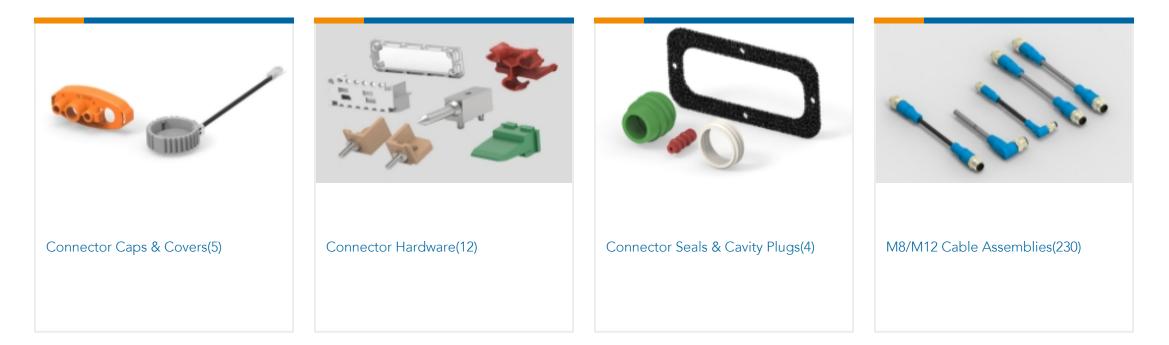



Customers Also Bought



TE Part # T4145015051-001 M12 R/A F PNLREAR STAMPED PIN A- CODE 5P	TE Part # 160917-2 FF 250 REC 1-2.5MM2 TPBR	TE Part # 280919-4 FF 187 REC 0.5-1.5MM2 TPPB	TE Part # 281197-2 FF 187 REC 1.0-2.5MM2 PTBR
TE	ETE		
TE Part # 6368120-1 MJ,8POS,2PORT,UNSHLD,CAT 5e	TE Part # 625160-000 D-110-41	TE Part # 929938-1 JPT REC 2.8 Contact SWS Sn (LP)	TE Part # 6-1393292-3 V23074A2002A403-EV-CBOX



Documents

Standard Circular Connectors, Wire-to-Panel, 8 Position, Sealable, Wire & Cable, Signal, Panel Mount, Reverse Gender, Nickel, M12 Connector



Product Drawings M12 RA PCB CONN. Female 8 P UN SHIELD

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_T4145015081-002_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_T4145015081-002_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_T4145015081-002_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions**of use.

Product Specifications Application Specification

English