

**Style**  
M8 Socket, shielded  
6 pin  
A-coding

**Ratings**  
Voltage: 30 V  
Current: 1 A


**Operating Temperature Range**  
-40~105 °C

- Materials**
- ① Insulator: PA66, UL 94 HB, black
  - ② Pin: C3604 brass, gold flashing
  - ③ Nut: C3604 brass, nickel plated
  - ④ Shell: C3604 brass, nickel plated
  - ⑤ O-ring: Nitrile rubber, black & green

**Electrical Requirements**  
Dielectric strength: 1 min @ 500 Vac  
Insulation resistance: 100 MΩ @ 500 Vdc  
Contact resistance: 10 mΩ or less

**Mechanical Requirements**  
Life cycle: 1000 mating cycles minimum

**Environmental Requirements**  
Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 24 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 mΩ.  
Waterproof: IP67

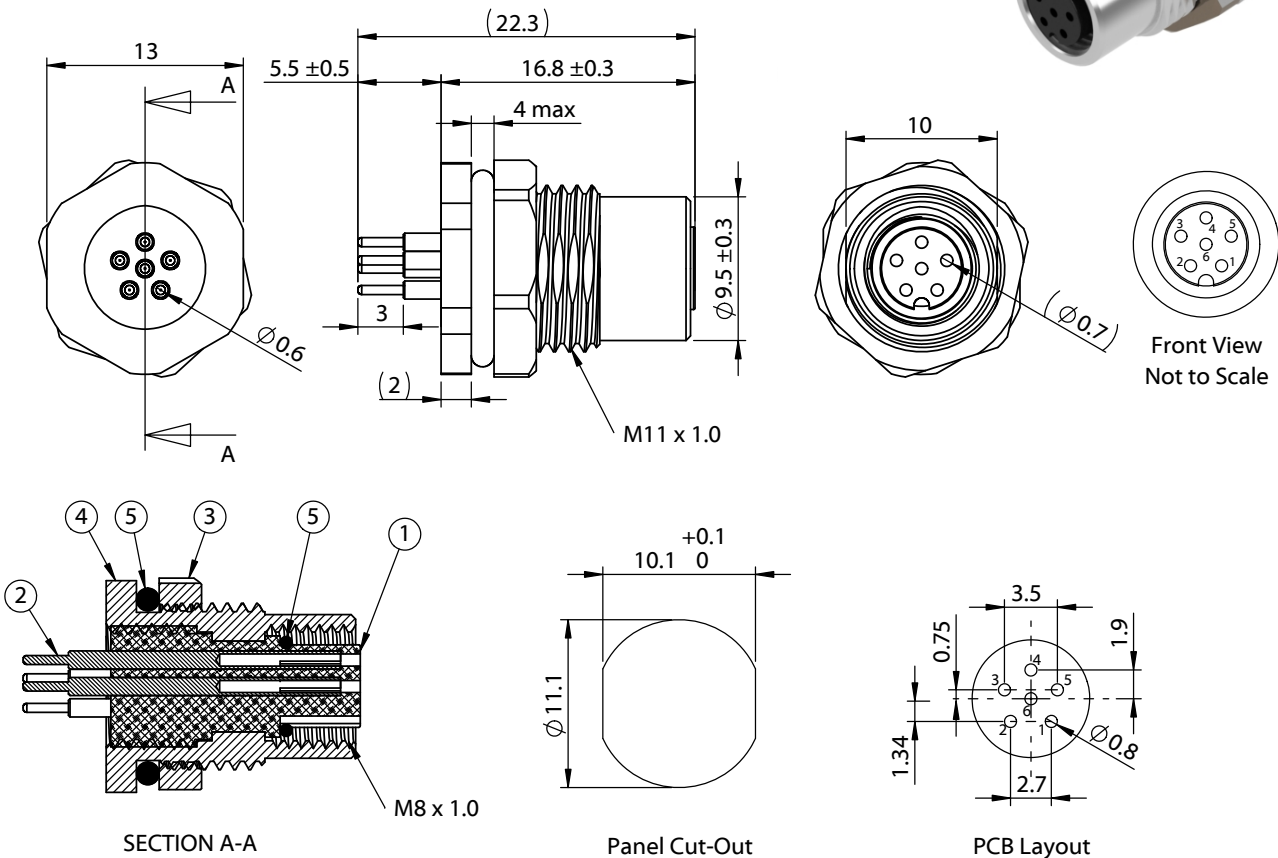

Revision:	Date:	Description:
A	1/13/23	Initial Release

Prepared:
Verified:
Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm

Notes:
RoHS compliant
Function test: no open, no short circuit, no intermittent
Description: Connector, 6 pin M8 A-code socket, 8x22.3 mm, gold plated, panel mount, PCB, IP67

**TENSILITY**

tel 1.541.323.3228 800 877.670.7118  
fax 1.541.323.4202 web tensility.com

Size:	Part number:
A	54-00323
Scale: 2:1	Sheet 1 of 1