


-XX IN THE ENDING OF THE CABLE PART NUMBER IS CALLING OUT THE LENGTH OF THE ASSEMBLY FROM CENTER TO MATING FLANGE OF CONNECTORS. EXAMPLES SHOWN BELOW:

LTI P/N: CB1.37-IPXLK-MCMGT-4IN (4 INCHES)  
CB1.37-IPXLK-MCMGT-10IN (10 INCHES)



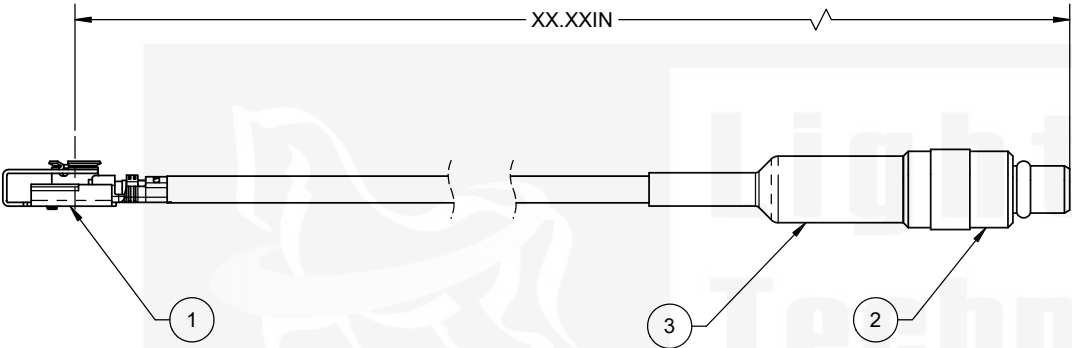

ITEM	PART NUMBER	DESCRIPTION	QTY
1	CB1.37-IPXLK-500MM	IPXLK (MHF1 LK) LOCKING, RHT ANGLE, JACK, USING 1.37 CABLE, BLACK, (I-PEX 20351-112R-37)	0.5
2	MCSM11GT-178	MMCX, STRAIGHT, PLUG, CABLE CRIMP	1
3	1635F-1/8"	.125 (1/8) DIA, .75 LENGTH, GREEN	1

SCALE: NONE

IPX® AND MHF® ARE REGISTERED TRADEMARKS OF I-PEX CO., LTD. CORPORATION

PROPRIETARY AND CONFIDENTIAL  
UNLESS OTHERWISE SPECIFIED: THIS DOCUMENT CONTAINS LIGHTHORSE TECHNOLOGIES INFORMATION. REPRODUCTION, USE, DISCLOSURE OR TRANSMITTAL OF ALL OR ANY PART OF THIS DOCUMENT IS PROHIBITED EXCEPT TO THE EXTENT APPROVED IN WRITING BY AN AUTHORIZED REPRESENTATIVE OF LIGHTHORSE TECHNOLOGIES. LIGHTHORSE TECHNOLOGIES RESERVES ALL RIGHTS UNDER PATENTS, TRADEMARKS, COPYRIGHTS AND TRADE SECRETS. COPY RIGHTS OF LIGHTHORSE TECHNOLOGIES 2011, ALL RIGHTS RESERVED.



DO NOT SCALE DRAWING					<b>Lighthouse Technologies</b> San Diego, CA WWW.RFCONNECTOR.COM	
TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS X = ±0.5 X.X = ±0.25 X.XX = ±0.13 ANGLE = ±30°					TITLE: CABLE ASSEMBLY, IPXLK (MHF1 LK), LOCKING, R/A JACK, CRIMP TO MMCX, PLUG, CRIMP USING 1.37 MICRO COAX	
CUSTOMER APPROVAL						
SIGN / DATE:						
ENG APPR.	P. BURDGE	06/07/2022				
CHECKED	M. HELD	06/07/2022				
DRAWN	M. LARSEN	06/07/2022				
NAME		DATE				
SIZE	PART/DWG. NO:		REV			
B	CB1.37-IPXLK-MCMGT-xxIN		A			
SCALE: 4:1		FILE NAME		SHEET 1 OF 1		