



UHF Sexless Connector Accessories Attachment For RG59, RG62, RG71

TECHNICAL DATA SHEET

PE4021

UHF Sexless Connector Accessories Attachment For RG59, RG62, RG71

Configuration

Connector	UHF Sexless
Connector Interface Type	RG59,RG62,RG71
Cable Attachment Method (Shield/Contact)	Accessories
Body Style	Straight

Electrical Specifications

Impedance, Ohms	50
-----------------	----

Mechanical Specifications

Size

Length, in [mm]	0.985 [25.02]
Width/Dia., in [mm]	0.433 [11.00]
Weight, lbs [g]	0.027 [12.25]

Connector

Type	UHF Sexless
Body Material and Plating	Brass, Nickel

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Plotted and Other Data


Notes:	Values at 25 °C, sea level
--------	----------------------------

UHF Sexless Connector Accessories Attachment For RG59, RG62, RG71 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [UHF Sexless Connector Accessories Attachment For RG59, RG62, RG71 PE4021](http://www.pasternack.com/uhf-sexless-standard-rg59-connector-pe4021-p.aspx)

URL: <http://www.pasternack.com/uhf-sexless-standard-rg59-connector-pe4021-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

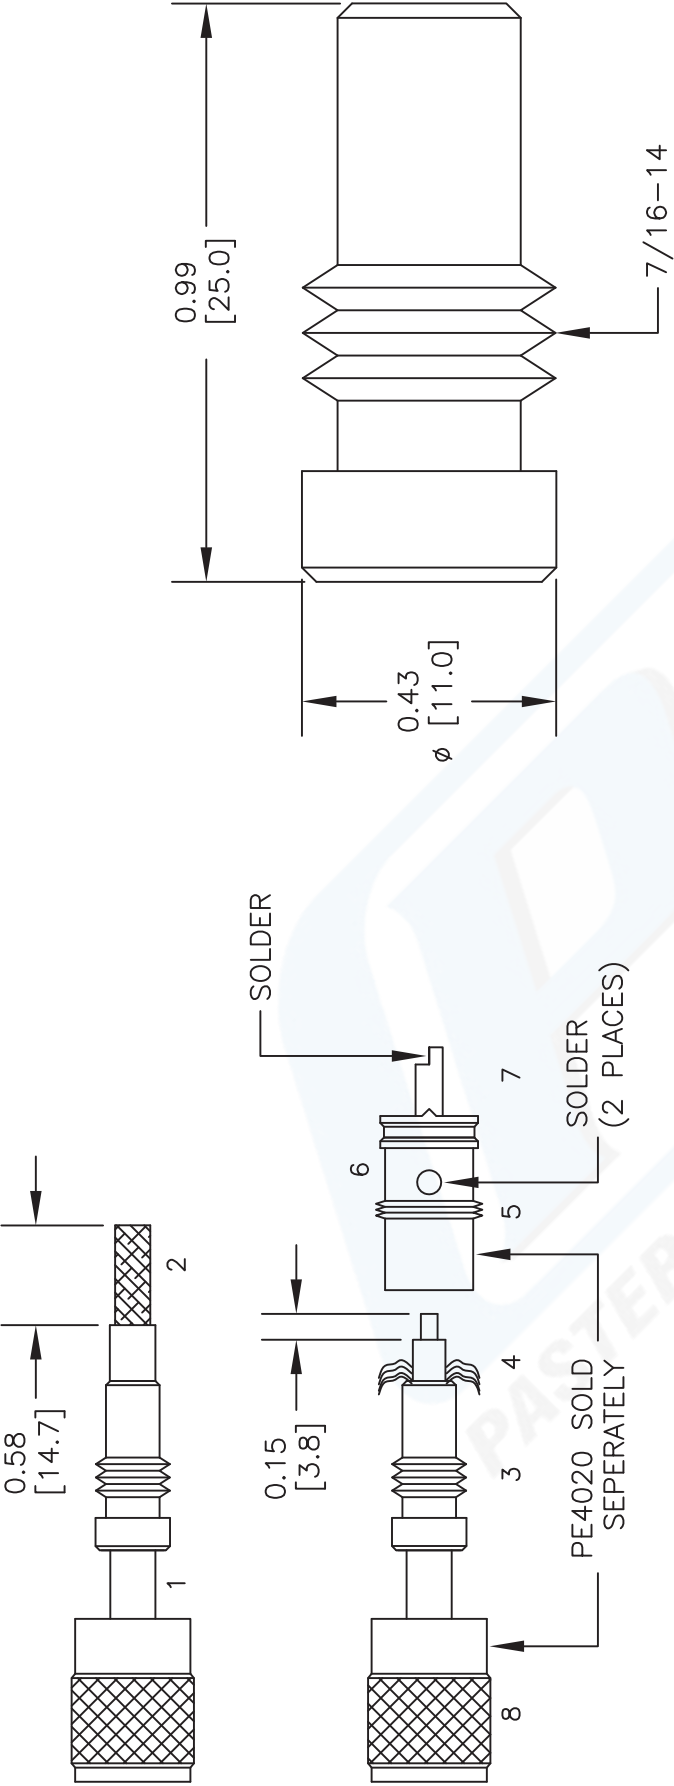

ASSEMBLY PROCEDURES

1. SLIDE : COUPLING NUT & CLAMP OVER THE JACKET OF COAX CABLE.
2. STRIP TO GIVEN DIMENSIONS.
3. SLIDE CLAMP TOWARD THE BEGINNING OF THE STRIPPED AREA.
4. FLARE / COMB BRAID BACK ONTO THE CLAMP AND STRIP CENTER CONDUCTOR.
5. THREAD CONNECTOR BODY ONTO CLAMP.
6. SOLDER CONNECTOR BODY ON TO THE BRAIDED & CLAMP THROUGH SOLDER HOLE.
7. SOLDER CENTER CONTACT ONTO THE CENTER CONDUCTOR.
8. SLIDE COUPLING NUT FORWARD & THREAD ONTO THE CONNECTOR BODY.



Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE4021

FSCM NO. 53919

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

CAD FILE 040113-A

SCALE N/A

SIZE A

2233