

SMA-SMA SWEPT ADAPTERS


SM5280, SM5285, SM5290, SM5295

SPECIFICATIONS


ELECTRICAL
50 OHMS
VSWR 1.30:1 MAX @ 18 GHZ
FREQUENCY: 0-18 GHZ

MECHANICAL
500 CYCLES MIN
INTERFACE: MIL-STD-348A


MATERIALS
BODY PASSIVATED STAINLESS STEEL
CONTACTS BeCu(f), BRASS(m)
CONTACT PLATING: Au MIL-G-45204
DIELECTRIC: TEFLON
OP TEMP -55°-125°C
TORQUE: 7.5-8 in-IBS
ROHS COMPLIANT




SM5290



SM5285




SM5280



SM5295

MEASUREMENTS BELOW ARE TYPICAL

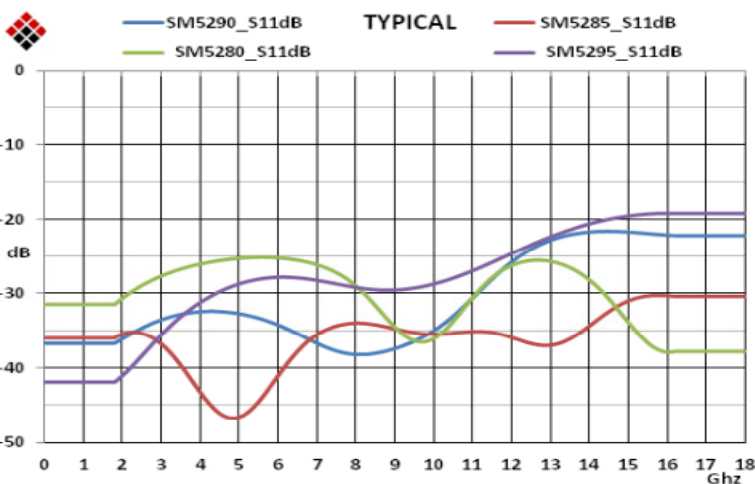

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA-SMA SWEPT ADAPTERS

SIZE

A

CAGE CODE

3FKR5

DWG NO

SM5280 - SM5295

REV

F

SCALE

SHEET