



REV.	DATE	ECR NO.	DESCRIPTION
NC	04/10/12	—	INITIAL RELEASE

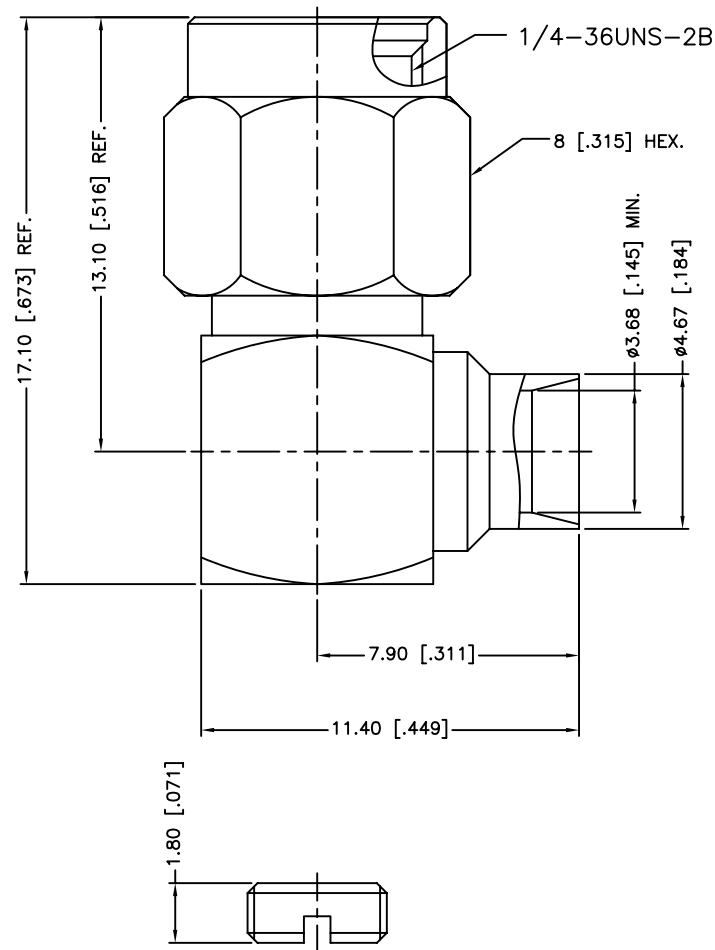

RECOMMENDED
CABLE STRIPPING DIM'S

1. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
7	COVER	BRASS	GOLD	1	DRAWN	M.ZHANG	04/10/12								
6	GASKET	SILICON RUBBER	RED	1	CHECKED			PART DESCRIPTION SMA R/A DIRECT SOLDER PLUG (FOR .141” SEMI-RIGID CABLE)							
5	RETAINER RING	SUS 304	NATURAL	1	ISSUED										
4	CONTACT PIN	BRASS	GOLD	1	SHEET	1 OF 1		PART NO. 132112SS							
3	INSULATOR	PTFE	NATURAL	1	CAD FILE										
2	HOUSING WITH BARREL	BRASS	GOLD	1	C:/CONNEX/132112SS.DWG			DWG. NO.	132112SS.DWG	REV.	NC	SIZE	A	SCALE	NA
1	SHELL	STAINLESS STEEL	PASSIVATED	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											