

QMA Male Snap-On Connector Crimp/Solder Attachment For LMR-200 Cable

QMA male snap-on for LMR-200, part number FMCN1102, from Fairview Microwave is in-stock and ships same day. This QMA male connector operates up to a maximum frequency of 6 GHz and offers good VSWR of 1.5:1.

Fairview's QMA male connector FMCN1102 datasheet specifications and outline drawing are shown in this PDF below. Our extensive offering of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. From providing an I/O for a board design to creating a custom cable assembly configuration, Fairview Microwave has a connector solution to meet your needs. Fairview Microwave also has the expertise to build your custom cable assemblies for you and ship them same-day.

Electrical Specifications

Description	Min	Typ	Max	Units
Frequency Range	DC		6	GHz
VSWR			1.5:1	
Operating Voltage (AC)			335	Vrms
DWV (AC)			1,000	Vrms
Insulation Resistance	5,000			MOhms

Mechanical Specifications

Size	
Length	1.12 in [28.45 mm]
Width/Dia.	0.41 in [10.41 mm]
Weight	0.0175 lbs [7.94 g]
Mating Cycles	100 Cycles

Material Specifications

Description	Material	Plating
Contact	Brass	Gold 51µ in. minimum
Insulation	PTFE	
Body	Brass	Tri-Metal
Coupling Nut	Brass	Tri-Metal

Environmental Specifications

Temperature	
Operating Range	-40 to +80 deg C
Hermetic Seal	ATM. cm3/s

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:



Configuration:

- Snap-On QMA Male Connector
- 50 Ohms
- Straight Body Geometry
- LMR-200 Interface Type
- Crimp/Solder Attachment

Features:

- Operating Frequency of 6 GHz Max.
- Good VSWR of 1.5:1
- Gold Plated Brass Contact
- 51µ in. minimum contact plating
- Snap-On Quick Locking Connection
- Snap-On features allows reduced connector spacing
- 100 mating cycles typical
- Capable of 360 degree rotation reducing strain
- QN Interface is electrically equivalent to Type-N interface

Applications:

- General Purpose Test
- Custom Cable Assemblies
- Telecom systems including DAS
- Equipment rack applications
- High connection density systems

Fairview Microwave
 1130 Junction Dr. #100
 Allen, TX 75013
 Tel: 1-800-715-4396 / (972) 649-6678
 Fax: (972) 649-6689
www.fairviewmicrowave.com
sales@fairviewmicrowave.com


QMA Male Snap-On Connector Crimp/Solder Attachment For LMR-200 Cable from Fairview Microwave is in-stock and available to ship same-day. All of our RF/microwave products are available off-the-shelf from our ISO 9001:2008 certified facilities in Allen, Texas. Fairview Microwave is RF on-demand.

For additional information on this product, please click the following link: [QMA Male Snap-On Connector Crimp/Solder Attachment For LMR-200 Cable FMCN1102](#)

URL: <https://www.fairviewmicrowave.com/qma-male-snap-on-lmr-200-connector-fmcn1102-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Fairview Microwave reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Fairview Microwave does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Fairview Microwave does not assume any liability arising out of the use of any part or documentation.



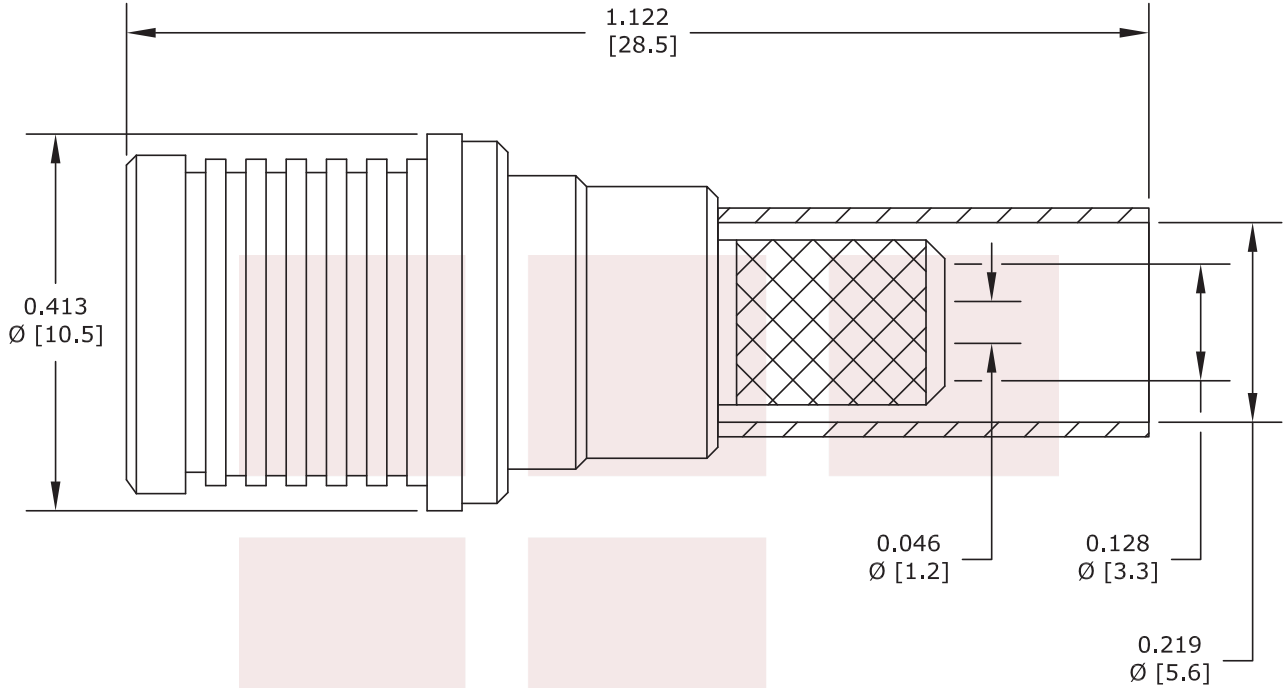

STRIPPING DIMENSIONS

CRIMP SIZE REQUIRED

CONTACT: SOLDER
 FERRULE: .213" HEX CRIMP TOOL

FAIRVIEW MICROWAVE INC. ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].			
TITLE QMA Male Snap-On Connector Crimp/Solder Attachment For LMR-200 Cable		DWG NO FMCN1102		CAGE CODE 3FKR5	
CAD FILE	061716	SHEET	SCALE	N/A	SIZE A 2233