

SMA-M .085SR 27GHZ CAPT PIN TRIM SLIDE SOLDER

SC3025

SPECIFICATIONS

ELECTRICAL:


FREQUENCY: 0-27 GHZ
IMPEDANCE: 50 OHMS

MECHANICAL:

MATERIAL BODY: BeCu
MATERIAL NUT: PASSIVATED STAINLESS STEEL
CENTER CONTACT: BRASS
CONTACT PLATING: Au MIL-G-45204
INTERFACE: MIL-STD-348A
INSULTAOR: PTFE

OP. TEMP RANGE: -55°C to +120°C

ROHS COMPLIANT

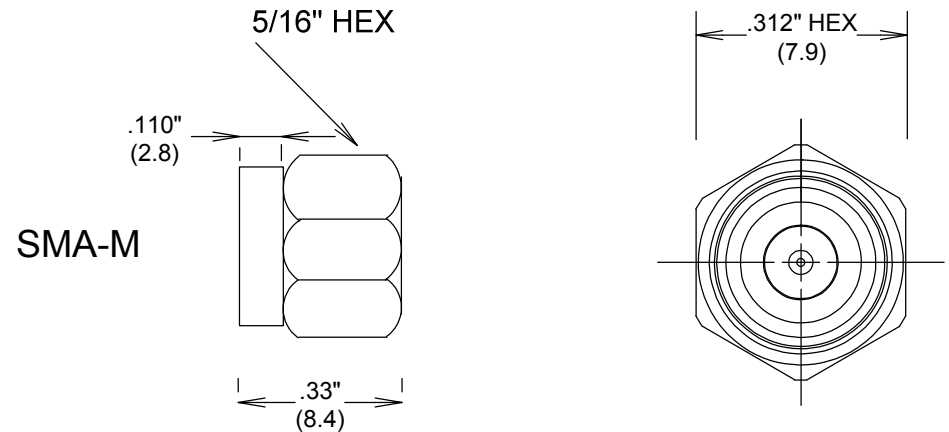

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**SMA-M .085SR 27GHZ CAPT PIN
TRIM SLIDE SOLDER**

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC3025	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(MM) Typical