

SMP-F .086" SR MP CABLE CONN

SC5155

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-40 GHZ
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL BODY: BeCu
CENTER CONTACTS: BeCu
PLATING: Au PER MIL-G-45204
INSULATOR: TEFLON
INTERFACE: SMP DESC 94008
ROHS COMPLIANT

SMP-F
DESC 94008

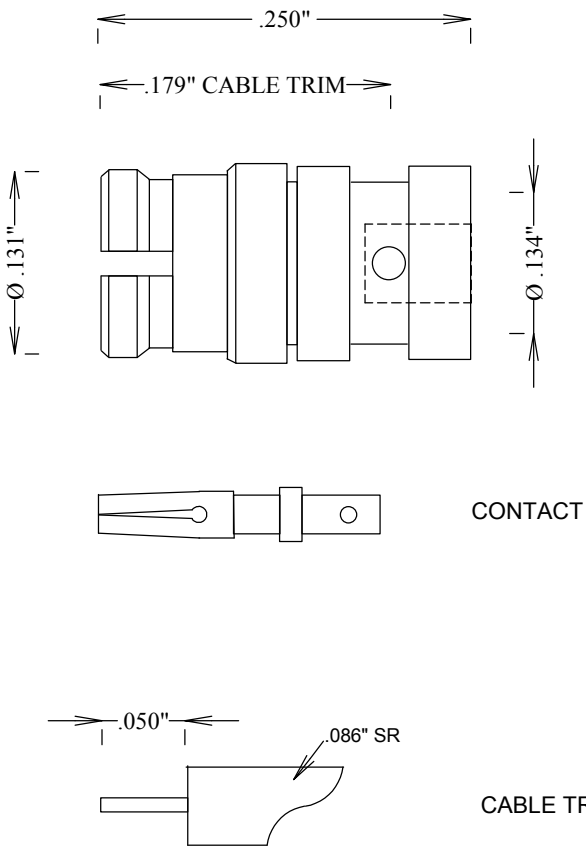

FAIRVIEW MICROWAVE INC.				
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM				
TITLE				
SMP-F .086" SR MP CABLE CONN				
SIZE	CAGE CODE	DWG NO	REV	
A	3FKR5	SC5155	--	
SCALE	SHEET			