

SMP MALE FULL DETENTE HERMETIC SHROUD

SC5271


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-40 GHZ
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55°C to +125°C

MECHANICAL:

MATERIAL: KOVAR
PLATING: Au PER MIL-G-45204
INTERFACE: SMP DESC 94007
FULL DETENTE
FORCE TO ENGAGE: 15.0 LBS MAX
FORCE TO DISENGAGE: 5.0 LBS MIN
ROHS COMPLIANT

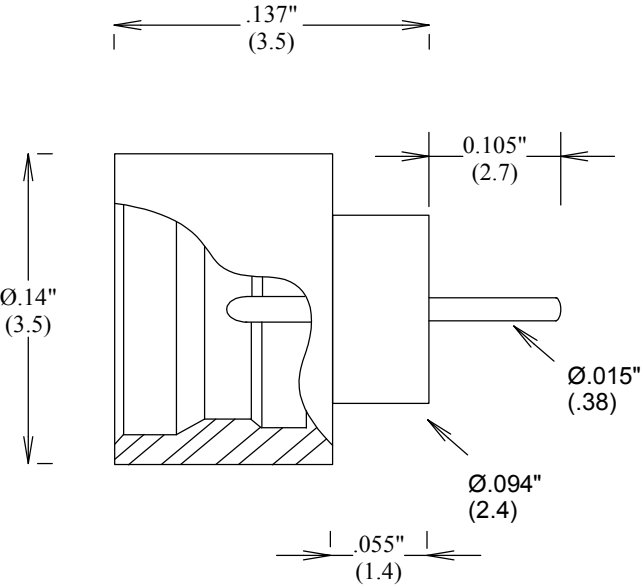

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**SMP MALE FULL DETENTE
HERMETIC SHROUD**

ALL DIMENSIONS IN inches(MM) Typical	SIZE	CAGE CODE	DWG NO	REV
	A	3FKR5	SC5271	--
	SCALE		SHEET	