

SMP MALE SMOOTH BORE HERMETIC SHROUD

SC5274


SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-40 GHZ
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL: KOVAR
PLATING: Au PER MIL-G-45204
INTERFACE: SMP DESC 94007
SMOOTH BORE
FORCE TO ENGAGE: 2.0 LBS MAX
FORCE TO DISENGAGE: 0.5 LBS MIN
ROHS COMPLIANT

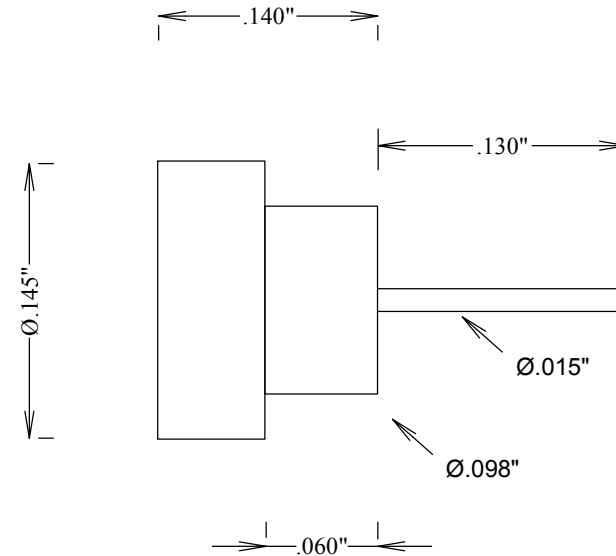

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

**SMP MALE SMOOTH BORE
HERMETIC SHROUD**

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC5274	--

SCALE

SHEET