

# SMP MALE THREAD IN SHROUD

## LIMITED DETENTE

SC5508


### SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-40 GHZ  
IMPEDANCE: 50 OHMS  
OP. TEMP RANGE: -55° to +125°C

MECHANICAL:

MATERIAL: PASSIVATED S STEEL  
INTERFACE: SMP DESC 94007  
LIMITED DETENTE  
FORCE TO ENGAGE: 10.0 LBS MAX  
FORCE TO DISENGAGE: 2.0 LBS MIN  
ROHS COMPLIANT

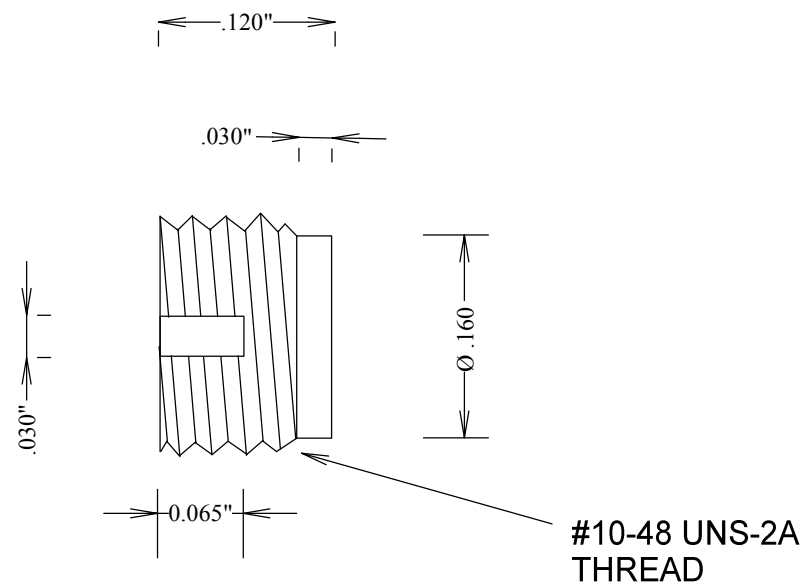

|       |  |                                              |        |  |       |
|-------|--|----------------------------------------------|--------|--|-------|
|       |  | FAIRVIEW MICROWAVE INC.                      |        |  |       |
|       |  | ALLEN, TX 75013    WWW.FAIRVIEWMICROWAVE.COM |        |  |       |
|       |  | TITLE                                        |        |  |       |
|       |  | SMP MALE THREAD IN SHROUD<br>LIMITED DETENTE |        |  |       |
| SIZE  |  | CAGE CODE                                    | DWG NO |  | REV   |
| A     |  | 3FKR5                                        | SC5508 |  | A     |
| SCALE |  |                                              |        |  | SHEET |