


COAXIAL CONNECTOR, QMA, 50 Ohm, Straight bulkhead cable jack (female)

24_QMA-50-3-2/133_N

Properties

- Excellent electrical performance
- High packing density
- Applicable in frequencies up to 18 GHz
- Easy to mate - No torque or tooling required
- Return loss optimized DC to 6 GHz

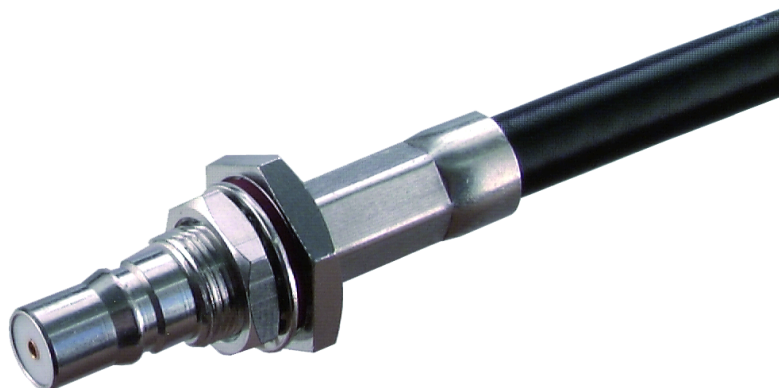

Product configuration		
Interface type	Gender	Standard
QMA	jack	QMA QLF compliant

Interface and material data		
Piece parts	Material	Plating
Centre contact	Copper Beryllium Alloy	SUCOPRO Plating
Outer conductor	Brass	SUCOPLATE (R) Plating
Body	Brass	SUCOPLATE (R) Plating
Insulator	PFA / PTFE	
Gasket	VMQ (Silicone rubber)	
Fastening nut	Brass	SUCOPLATE (R) Plating
Washer	Bronze	SUCOPLATE (R) Plating
Crimp ferrule	Copper	SUCOPLATE (R) Plating

Electrical data		
Impedance		50 Ω
Interface frequency		6 GHz

Electrical Data (frequency related)		
Frequency range	Return loss	VSWR
0 GHz ... 1 GHz	32 dB	1.051

Mechanical data	
Weight	0.0053 kg
Mating cycles	100
Cable entry centre contact	soldered
Cable entry outer contact	crimped

COAXIAL CONNECTOR, QMA, 50 Ohm, Straight bulkhead cable jack (female)

24_QMA-50-3-2/133_N

Environmental data		
Operation temperature	-40 °C ... 85°C	
Ordering Information Table		
Item number	Item description	Packaging type
23017795	24_QMA-50-3-2/133_NE	Single
Suitable cables		
Cable group	U7 - 3 mm / 50 Ohm	
Suitable cables	GX_03272-04	
	G_03232	
	RG_58_C/U	
Additional Information		
Only as assembly	No	

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2594 / Date of publication: 25.11.2023 / uncontrolled copy