



BNC Twinax Jack Connector Solder Attachment 4 Hole Flange Mount Solder Cup Terminal, .500 inch Threaded Hole Spacing

RF Connectors Technical Data Sheet

PE4324

Configuration

- BNC Twinax Jack Connector
- MIL-STD-348
- 78 Ohms
- Straight Body Geometry
- Solder Cup Interface Type
- Solder Attachment
- 4 Hole Flange

Features

- Silver Plated Contact
- Contact plating according to QQ-S-365

Applications

- General Purpose Test
- Rack and Panel Mount Applications

Description

Pasternack's PE4324 BNC Twinax jack connector solder attachment 4 hole flange mount solder cup terminal, .500 inch threaded hole spacing is part of our full line of RF components available for same-day shipping. This BNC Twinax 4 hole flange connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our 78 ohm BNC Twinax jack 4 hole flange connector PE4324 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable connector assemblies for you and ship same-day.

Mechanical Specifications

Size

| | |
|------------|---------------------|
| Length | 1.03 in [26.16 mm] |
| Width/Dia. | 0.687 in [17.45 mm] |
| Height | 0.687 in [17.45 mm] |
| Weight | 0.013 lbs [5.9 g] |

Material Specifications

| Description | Material | Plating |
|-------------|----------|--------------------|
| Contact | | Silver QQ-S-365 |
| Insulation | PTFE | |
| Body | Brass | Nickel QQ-N-290 |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Jack Connector Solder Attachment 4 Hole Flange Mount Solder Cup Terminal, .500 inch Threaded Hole Spacing PE4324](#)



BNC Twinax Jack Connector Solder Attachment 4 Hole Flange Mount Solder Cup Terminal, .500 inch Threaded Hole Spacing

RF Connectors Technical Data Sheet

PE4324

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

BNC Twinax Jack Connector Solder Attachment 4 Hole Flange Mount Solder Cup Terminal, .500 inch Threaded Hole Spacing from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Twinax Jack Connector Solder Attachment 4 Hole Flange Mount Solder Cup Terminal, .500 inch Threaded Hole Spacing PE4324](#)

URL: <https://www.pasternack.com/bnc-twinax-jack-standard-solder-cup-terminal-connector-pe4324-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE4324 CAD Drawing

BNC Twinax Jack Connector Solder Attachment 4 Hole Flange Mount
Solder Cup Terminal, .500 inch Threaded Hole Spacing

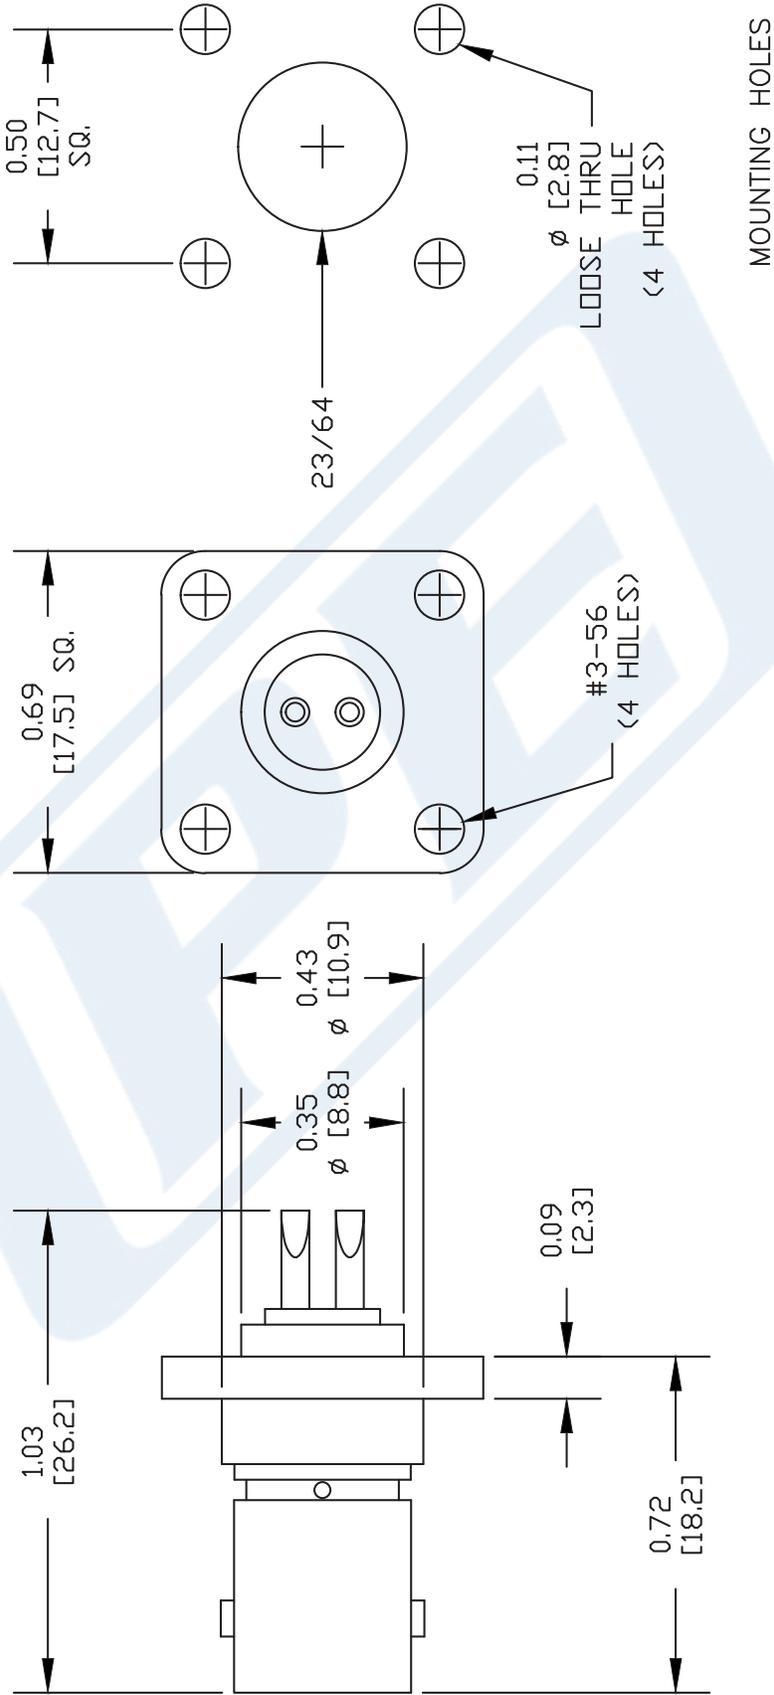

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE4324

FSCM NO. 53919

CAD FILE 020513 SCALE N/A SIZE A 2231

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com