

# N Male Connector Clamp/Solder Attachment for PE-C600, 0.600 inch, LMR-600



### RF Connectors Technical Data Sheet

PE44349

# Configuration

- N Male Connector
- MIL-STD-348
- 50 Ohms

- Straight Body Geometry
- PE-C600, 0.600 inch, LMR-600 Interface Type
- Clamp/Solder Attachment

#### **Features**

Silver Plated Contact

Contact plating according to QQ-S-365

# **Applications**

• General Purpose Test

• Custom Cable Assemblies

# Description

Pasternack's PE44349 type N male connector with clamp/solder attachment for PE-C600, 0.600 inch and LMR-600 is part of our full line of RF components available for same-day shipping.

Our type N male connector PE44349 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

#### **Mechanical Specifications**

Size

 Length
 1.93 in [49.02 mm]

 Width/Dia.
 0.8 in [20.32 mm]

 Weight
 0.162 lbs [73.48 g]

#### **Material Specifications**

Description	Material	Plating
Contact		Silver QQ-S-365
Insulation	PTFE	
Body	Brass	Nickel QQ-N-290
Coupling Nut	Brass	Nickel QQ-N-290

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Connector Clamp/Solder Attachment for PE-C600, 0.600 inch, LMR-600 PE44349

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 Phone: (866) 727-8376 or (949) 261-1920 • Fax: (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com



# N Male Connector Clamp/Solder Attachment for PE-C600, 0.600 inch, LMR-600



### RF Connectors Technical Data Sheet

PE44349

# Environmental Specifications Temperature

**Operating Range** 

-65 to +165 deg C

Compliance Certifications (see product page for current document)

#### **Plotted and Other Data**

Notes:

N Male Connector Clamp/Solder Attachment for PE-C600, 0.600 inch, LMR-600 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male Connector Clamp/Solder Attachment for PE-C600, 0.600 inch, LMR-600 PE44349

URL: https://www.pasternack.com/n-male-standard-pe-c600-connector-pe44349-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com

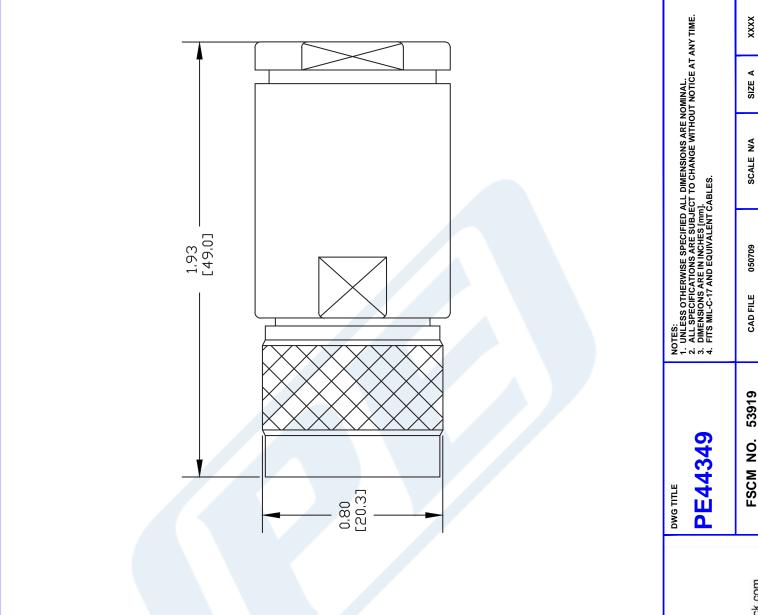



Pasternack Enterprises, Inc. P.O. Box 16759 | Irvine | CA | 92623

Website: www.pasternack.com | E-Mail: sales@pasternack.com Phone: (949) 261-1920 | Fax: (949) 261-7451

[11,4] 0,45

ASSEMBLY PROCEDURES

SLIDE BRAID CLAMP (4) OVER BRAID & SEAT AGAINST JACKET. PERMIT ASSEMBLY OF BRAID CLAMP (4)

GASKET (3) OVER CABLE. STRIP CABLE AS SHOWN. DO NOT NICK BRAID WHILE

CUTTING JAKET. TAPER END OF BRAID

SLIDE CLAMP NUT (1), WASHER (2) &

FORM BRAID OVER CLAMP NUT (4). TRIM BRAID FLUSH WITH SHOULDER. CUT

ö

0.075 [1,9] DIELECTRIC & CENTER CONDUCTOR TO DIMENSION SHOWN. SLIDE WASHER (5) INSERT CABLE ASSEMBLY INTO BODY &

TIGHTEN.

CONTACT (7) TO CENTER CONDUCTOR.

INSULATOR (6) OVER CABLE. SOLDER