



75 Ohm 1.0/2.3 Plug Push-On Connector Crimp/ Crimp Attachment for BELDEN 735A1

RF Connectors Technical Data Sheet

PE45227

Configuration

- Push-On 1.0/2.3 Plug Connector
- 75 Ohms
- Straight Body Geometry
- BELDEN 735A1 Interface Type
- Crimp/Crimp Attachment

Features

- Max. Operating Frequency 3 GHz
- Excellent VSWR of 1.15:1
- Gold Plated Brass Contact
- Push-On connection
- Secure locking mechanism
- Performance to 3 GHz
- 500 Mating cycles

Applications

- General Purpose Test
- Custom Cable Assemblies
- Data Communications
- Video Processors
- Switching Equipment

Description

Pasternack's PE45227 75 ohm 1.0/2.3 plug push-on connector with crimp/crimp attachment for BELDEN 735A1 is part of our full line of RF components available for same-day shipping. Our 1.0/2.3 plug connector operates up to a maximum frequency of 3 GHz and offers excellent VSWR of 1.15:1. Pasternack's 75 Ohm DIN 1.0/2.3 connectors allow for a secure locking push-pull connection. These 1.0/2.3 connectors have an impedance of 75 Ohms and operate to 3 GHz, making these RF connectors an excellent choice for many data communications and audio/video applications. The small size of these 75 ohm 1.0/2.3 DIN connectors allows for a dense connector-to-connector footprint, saving valuable space in panels and other applications requiring a high number of interconnects. The durable positive locking connectors have a mating life of up to 500 connections.

Our 75 ohm 1.0/2.3 plug connector PE45227 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.15:1	

Mechanical Specifications

Size	
Length	1.06 in [26.92 mm]
Width/Dia.	0.307 in [7.80 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm 1.0/2.3 Plug Push-On Connector Crimp/Crimp Attachment for BELDEN 735A1 PE45227](#)



75 Ohm 1.0/2.3 Plug Push-On Connector Crimp/ Crimp Attachment for BELDEN 735A1

RF Connectors Technical Data Sheet

PE45227

Weight 0.01 lbs [4.54 g]

Material Specifications

Description	Material	Plating
Contact	Brass	Gold
Insulation	PTFE	
Body	Brass	Nickel
Coupling Nut	Brass	Nickel
Crimp Sleeve	Brass	Nickel

Environmental Specifications

Temperature

Operating Range -65 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Assembly Instruction

75 Ohm 1.0/2.3 Plug Push-On Connector Crimp/Crimp Attachment for BELDEN 735A1 from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm 1.0/2.3 Plug Push-On Connector Crimp/Crimp Attachment for BELDEN 735A1 PE45227](#)

URL: <https://www.pasternack.com/1.0-2.3-plug-push-on-belden-735a1-connector-pe45227-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE45227 CAD Drawing

75 Ohm 1.0/2.3 Plug Push-On Connector Crimp/Crimp Attachment for BELDEN 735A1

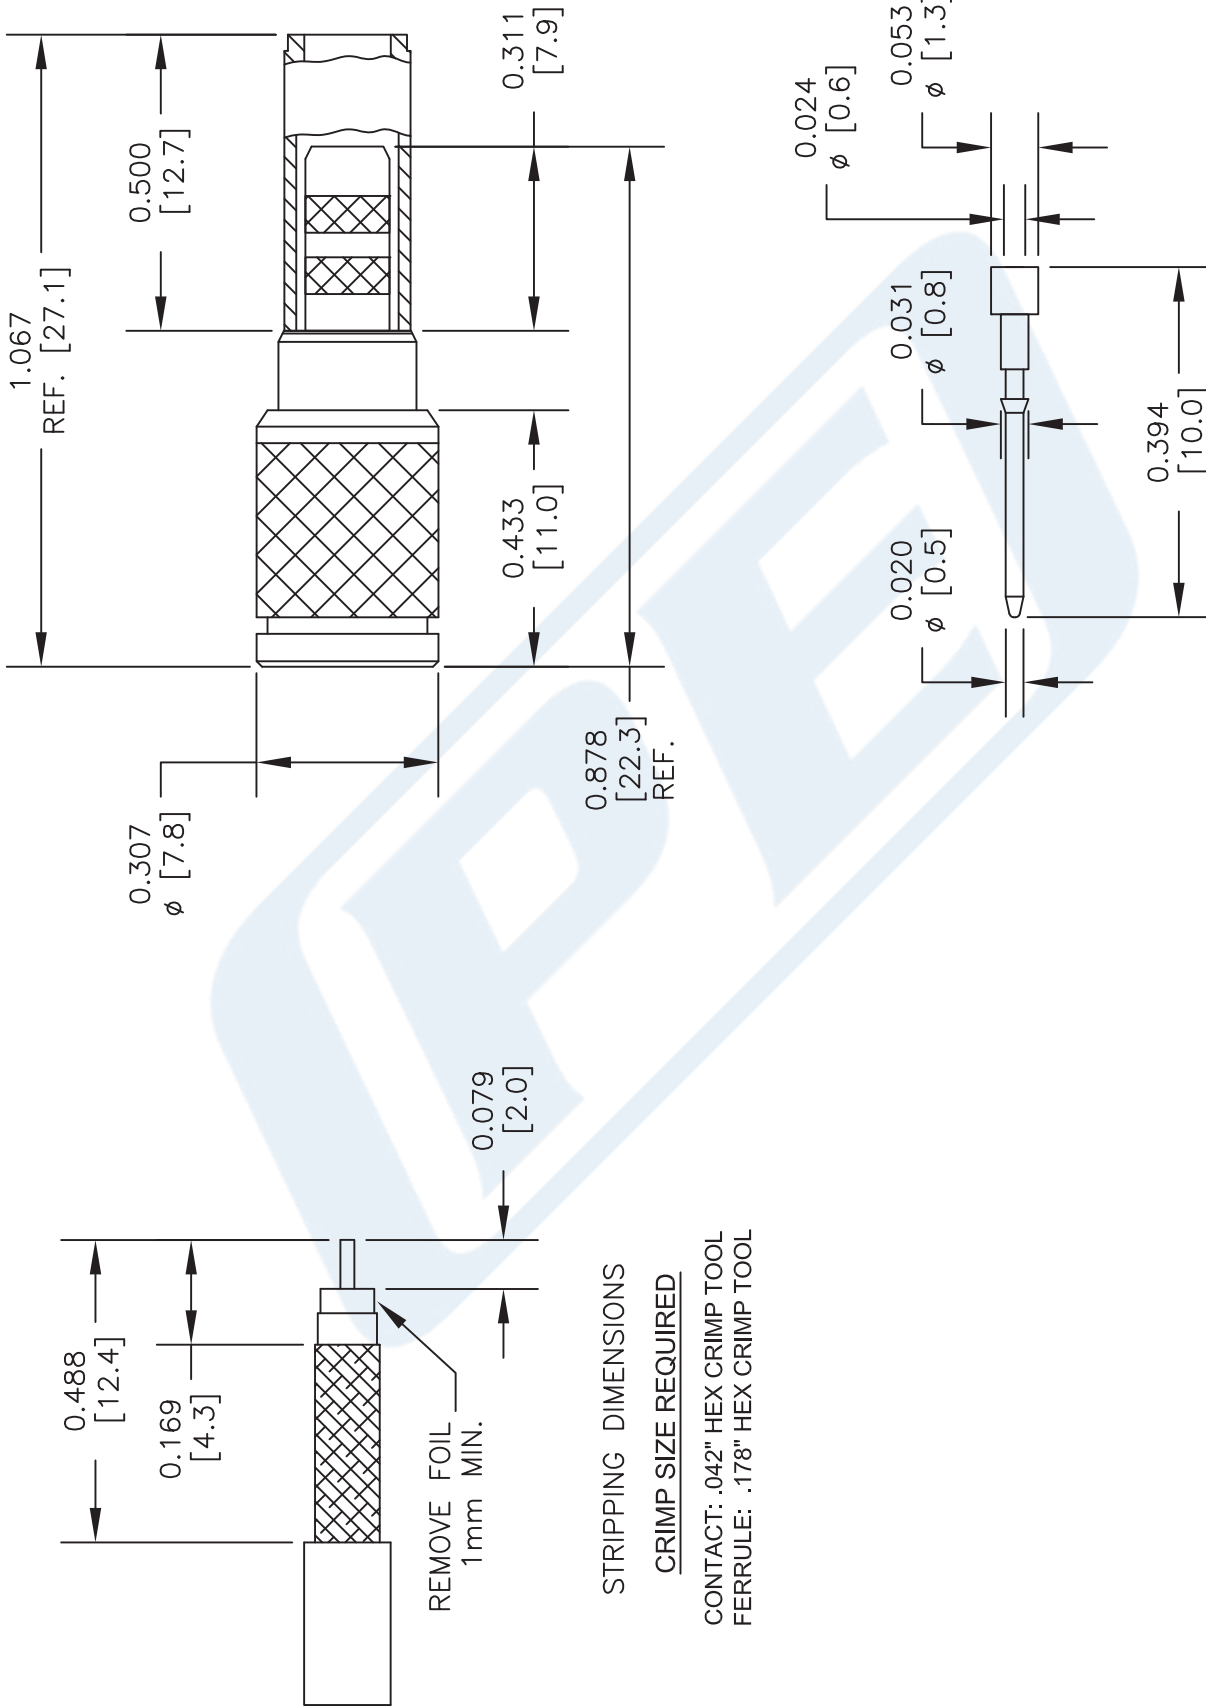

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. FITS MIL-C-17 AND EQUIVALENT CABLES.

DWG TITLE
PE45227

FSCM NO. 53919

CAD FILE 060316

SCALE N/A

SIZE A

2233

(PE) PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com