



## 10 Watt RF Load Up to 18 GHz With TNC Female Input Black Anodized Aluminum Heatsink

### RF Terminations Technical Data Sheet

PE6140

#### Features

- DC to 18 GHz Frequency Range
- VSWR 1.4:1 Max
- Max Power 10 Watt (CW)
- TNC Female Coaxial Interface

#### Applications

- Wireless
- Radar Systems
- Commercial and Military Communication
- SatCom
- Test and Measurement

#### Description

Pasternack's PE6140 is an RF termination (also called RF load or dummy load) that operates from DC to 18 GHz and handles up to 10 Watt (CW). Our TNC termination / load has a female gender. PE6140 TNC load termination offers 1.4:1 max VSWR. This Pasternack 10W TNC terminator has a heatsink body which is designed to provide adequate heat dissipation within its full frequency of operation.

RF load / terminations are indispensable components in many RF, microwave and millimeter wave systems where signal reflection from unused ports can potentially damage the device or reduce the signal integrity. By using a terminator on an unused port with a matched load (dummy load), the incident energy will be absorbed with minimal reflection. These termination components are commonly used to terminate devices such as couplers, circulators, and switches. They are also widely used in measurement systems to ensure accurate results. Pasternack offers a huge selection of RF, microwave and millimeter wave terminations up to 65 GHz with excellent performance over the entire operating range and power handling capabilities up to 800 Watt (CW).

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
Impedance		50		Ohms
VSWR			1.4:1	
Input Power (CW) derated linearly to 2W at +125°C			10	Watts
Input Power (Peak) 5µs pulse, 0.05% duty cycle			500	Watts

#### Mechanical Specifications

<b>Size</b>	
Length	1.81 in [45.97 mm]
Width	1 in [25.4 mm]
Weight	0.071 lbs [32.21 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 Watt RF Load Up to 18 GHz With TNC Female Input Black Anodized Aluminum Heatsink PE6140](#)



## 10 Watt RF Load Up to 18 GHz With TNC Female Input Black Anodized Aluminum Heatsink

### RF Terminations Technical Data Sheet

PE6140

#### Configuration

Connector	TNC Female
Connector Specification	MIL-STD-348

#### Material Specifications

Description	Material	Plating
Connector 1 Contact	Beryllium Copper	Gold
Body	Passivated Stainless Steel	
Housing	Black Anodized Aluminum Heatsink	

Mechanical Specification Notes:  
TNC connectors are mode-free up to 18 GHz.

#### Environmental Specifications

##### Temperature

Operating Range	-65 to +125 deg C
-----------------	-------------------

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

10 Watt RF Load Up to 18 GHz With TNC Female Input Black Anodized Aluminum Heatsink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [10 Watt RF Load Up to 18 GHz With TNC Female Input Black Anodized Aluminum Heatsink PE6140](#)

URL: <https://www.pasternack.com/tnc-female-high-power-termination-pe6140-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE6140 CAD Drawing

10 Watt RF Load Up to 18 GHz With TNC Female Input  
Black Anodized Aluminum Heatsink

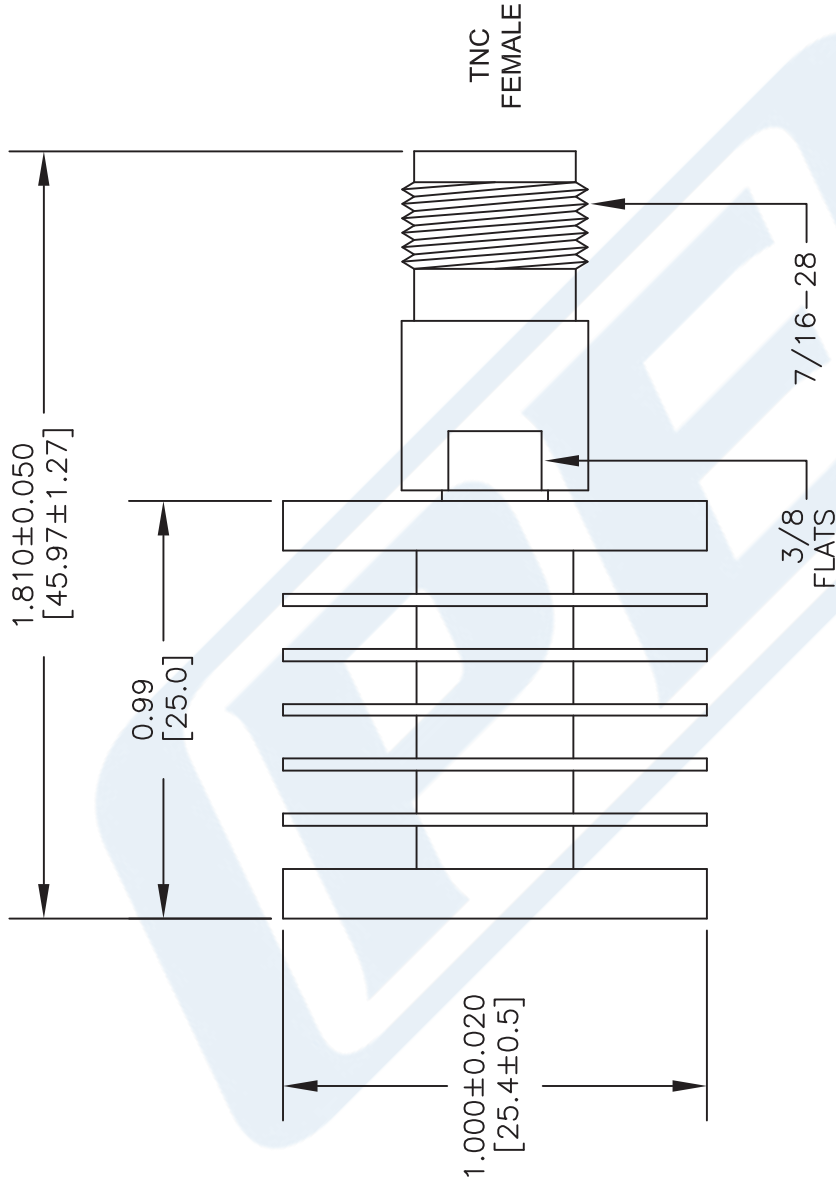

## STANDARD TOLERANCES

DECIMAL  
.XX ±0.01  
.XXX ±0.005

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE

**PE6140**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 060817

SCALE N/A

SIZE A

2233