SIEMENS

Data sheet


3SU1000-3EC10-0AA0



Toggle switch, 22 mm, round, plastic, black, 2 switch positions O<I, momentary contact type, connection from top

product brand name	SIRIUS ACT				
product designation	Toggle switches				
design of the product	Actuating/signaling element				
product type designation	3SU1				
product line	Plastic, black, 22 mm				
Enclosure					
number of command points	1				
Actuator					
principle of operation of the actuating element	momentary contact, reset from above				
product extension optional					
light source	No				
contact module	Yes				
color					
 of the actuating element 	black				
• of the cover cap	other				
material of the actuating element	plastic				
shape of the actuating element	Toggle lever				
outer diameter of the actuating element	29.45 mm				
number of switching positions	2				
Front ring					
product component front ring	Yes				
design of the front ring	Standard				
	plastic				
material of the front ring	plastic				
material of the front ring color of the front ring	black				
	•				
color of the front ring	•				
color of the front ring General technical data	black				
color of the front ring General technical data protection class IP	black IP66, IP67, IP69(IP69K)				
color of the front ring General technical data protection class IP degree of protection NEMA rating	black IP66, IP67, IP69(IP69K)				
color of the front ring General technical data protection class IP degree of protection NEMA rating shock resistance	black IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13				
color of the front ring General technical data protection class IP degree of protection NEMA rating shock resistance • according to IEC 60068-2-27	black IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13				
color of the front ring General technical data protection class IP degree of protection NEMA rating shock resistance • according to IEC 60068-2-27 vibration resistance	black IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms				
color of the front ring General technical data protection class IP degree of protection NEMA rating shock resistance • according to IEC 60068-2-27 vibration resistance • according to IEC 60068-2-6	black IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms 10 500 Hz: 5g				
color of the front ring General technical data protection class IP degree of protection NEMA rating shock resistance • according to IEC 60068-2-27 vibration resistance • according to IEC 60068-2-6 operating frequency maximum	black IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms 10 500 Hz: 5g 1 800 1/h				
color of the front ring General technical data protection class IP degree of protection NEMA rating shock resistance • according to IEC 60068-2-27 vibration resistance • according to IEC 60068-2-6 operating frequency maximum mechanical service life (operating cycles) typical	black IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms 10 500 Hz: 5g 1 800 1/h 1 000 000				
color of the front ring General technical data protection class IP degree of protection NEMA rating shock resistance • according to IEC 60068-2-27 vibration resistance • according to IEC 60068-2-6 operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2	black IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms 10 500 Hz: 5g 1 800 1/h 1 000 000 S				
color of the front ring General technical data protection class IP degree of protection NEMA rating shock resistance • according to IEC 60068-2-27 vibration resistance • according to IEC 60068-2-6 operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date)	black IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms 10 500 Hz: 5g 1 800 1/h 1 000 000 S				
color of the front ring General technical data protection class IP degree of protection NEMA rating shock resistance • according to IEC 60068-2-27 vibration resistance • according to IEC 60068-2-6 operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date) Ambient conditions	black IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms 10 500 Hz: 5g 1 800 1/h 1 000 000 S				
color of the front ring General technical data protection class IP degree of protection NEMA rating shock resistance • according to IEC 60068-2-27 vibration resistance • according to IEC 60068-2-6 operating frequency maximum mechanical service life (operating cycles) typical reference code according to IEC 81346-2 Substance Prohibitance (Date) Ambient conditions ambient temperature	black IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms 10 500 Hz: 5g 1 800 1/h 1 000 000 S 10/01/2014				

60721						
Installation/ mounting/	dimensions					
shape of the installati	on opening	round				
mounting diameter		22.3 1	nm			
positive tolerance of installation diameter		0.4 m	m			
mounting height		22.3 1	nm			
installation width		29.45	mm			
installation depth		26.3 1	nm			
Certificates/ approvals						
General Product Approval				Declaration of Conformity		
() E	<u>Confirmation</u>		EHC	UK CA	CE EG-Konf.	
Test Certificates	Marine / Shipping				other	
Type Test Certific- ates/Test Report	ABS	Lloyd's Register uis	PRS	RINA	<u>Confirmation</u>	
Environment Environmental Con- firmations						
Siemens has decided	to exit the Russian marke	et (see here).				
https://press.siemens.cc Siemens is working of Please contact your loc EAC relevant market (cc Information on the pa https://support.industry Information- and Dow	com/global/en/pressrelease/ n the renewal of the curre cal Siemens office on the sta other than the sanctioned E/ ickaging .siemens.com/cs/ww/en/vie/ vnloadcenter (Catalogs, Br	siemens-wind-down-russ ont EAC certificates. atus of validity of the EAC AEU member states Rus w/109813875	C certification if you inter	nd to import or offer to sup	ply these products to an	
https://www.siemens.co Industry Mall (Online	<u>om/ic10</u>					
Cax online generator				10-0AA0		
Service&Support (Ma	nuals, Certificates, Charac .siemens.com/cs/ww/en/ps/	cteristics, FAQs,)				
Image database (prod http://www.automation.	luct images, 2D dimension siemens.com/bilddb/cax_de	n drawings, 3D models e.aspx?mlfb=3SU1000-3	device circuit diagran EC10-0AA0⟨=en	ns, EPLAN macros,)		

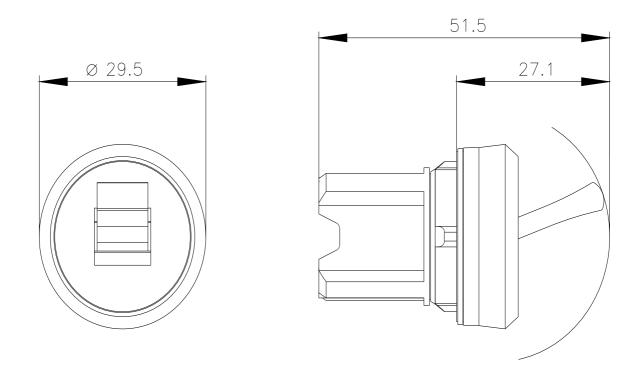

last modified:

1/26/2022 🖸