



Selector switch, illuminable, 22 mm, round, plastic with metal front ring, yellow, selector switch, short, 3 switch positions I>O<II, momentary contact on the left, latching on the right, actuating angle 2x45°, 10:30h/12h/13:30h

|                                                    |                                                                                            |
|----------------------------------------------------|--------------------------------------------------------------------------------------------|
| product brand name                                 | SIRIUS ACT                                                                                 |
| product designation                                | Selector switches                                                                          |
| design of the product                              | Actuating/signaling element                                                                |
| product type designation                           | 3SU1                                                                                       |
| product line                                       | Plastic with metal front ring, matt, 22 mm                                                 |
| <b>Enclosure</b>                                   |                                                                                            |
| number of command points                           | 1                                                                                          |
| <b>Actuator</b>                                    |                                                                                            |
| design of the actuating element                    | Selector, short                                                                            |
| principle of operation of the actuating element    | momentary contact/latching, 2x45° (10:30 h/12 h/13:30 h), return from left, right latching |
| product extension optional                         |                                                                                            |
| • light source                                     | Yes                                                                                        |
| • contact module                                   | Yes                                                                                        |
| color of the actuating element                     | yellow                                                                                     |
| material of the actuating element                  | plastic                                                                                    |
| shape of the actuating element                     | Handle                                                                                     |
| outer diameter of the actuating element            | 32.3 mm                                                                                    |
| number of switching positions                      | 3                                                                                          |
| actuating angle                                    |                                                                                            |
| • clockwise                                        | 45°                                                                                        |
| • anticlockwise                                    | 45°                                                                                        |
| <b>Front ring</b>                                  |                                                                                            |
| product component front ring                       | Yes                                                                                        |
| design of the front ring                           | standard                                                                                   |
| material of the front ring                         | Metal, matt                                                                                |
| color of the front ring                            | sand gray                                                                                  |
| <b>General technical data</b>                      |                                                                                            |
| protection class IP                                | IP66, IP67, IP69(IP69K)                                                                    |
| degree of protection NEMA rating                   | 1, 2, 3, 3R, 4, 4X, 12, 13                                                                 |
| shock resistance                                   |                                                                                            |
| • according to IEC 60068-2-27                      | sinusoidal half-wave 15g / 11 ms                                                           |
| • for railway applications according to EN 61373   | Category 1, Class B                                                                        |
| vibration resistance                               |                                                                                            |
| • according to IEC 60068-2-6                       | 10 ... 500 Hz: 5g                                                                          |
| • for railway applications according to EN 61373   | Category 1, Class B                                                                        |
| operating frequency maximum                        | 1 800 1/h                                                                                  |
| mechanical service life (operating cycles) typical | 1 000 000                                                                                  |
| reference code according to IEC 81346-2            | S                                                                                          |
| Substance Prohibitance (Date)                      | 10/01/2014                                                                                 |

| Safety related data                                            |                                                                    |
|----------------------------------------------------------------|--------------------------------------------------------------------|
| B10 value with high demand rate according to SN 31920          | 300 000                                                            |
| <b>proportion of dangerous failures</b>                        |                                                                    |
| • with low demand rate according to SN 31920                   | 20 %                                                               |
| • with high demand rate according to SN 31920                  | 20 %                                                               |
| failure rate [FIT] with low demand rate according to SN 31920  | 100 FIT                                                            |
| Ambient conditions                                             |                                                                    |
| <b>ambient temperature</b>                                     |                                                                    |
| • during operation                                             | -25 ... +70 °C                                                     |
| • during storage                                               | -40 ... +80 °C                                                     |
| environmental category during operation according to IEC 60721 | 3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 ... 95%) |
| Installation/ mounting/ dimensions                             |                                                                    |
| height                                                         | 32.3 mm                                                            |
| width                                                          | 32.3 mm                                                            |
| shape of the installation opening                              | round                                                              |
| mounting diameter                                              | 22.3 mm                                                            |
| positive tolerance of installation diameter                    | 0.4 mm                                                             |
| mounting height                                                | 28.8 mm                                                            |
| installation width                                             | 32.3 mm                                                            |
| installation depth                                             | 25.4 mm                                                            |
| Certificates/ approvals                                        |                                                                    |
| General Product Approval                                       | Declaration of Conformity                                          |



[Confirmation](#)





EG-Konf.

| Test Certificates                                                                              | Marine / Shipping |
|------------------------------------------------------------------------------------------------|-------------------|
| <a href="#">Type Test Certificates/Test Report</a><br><a href="#">Special Test Certificate</a> |                   |

other

[Confirmation](#)

| Further information                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Siemens has decided to exit the Russian market (see here).<br/> <a href="https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business">https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business</a></p> <p>Siemens is working on the renewal of the current EAC certificates.<br/> Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).</p> <p>Information on the packaging<br/> <a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a></p> <p>Information- and Downloadcenter (Catalogs, Brochures,...)<br/> <a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a></p> <p>Industry Mall (Online ordering system)<br/> <a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1032-2BP30-0AA0">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1032-2BP30-0AA0</a></p> <p>Cax online generator<br/> <a href="http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3SU1032-2BP30-0AA0">http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&amp;mlfb=3SU1032-2BP30-0AA0</a></p> <p>Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)<br/> <a href="https://support.industry.siemens.com/cs/ww/en/ps/3SU1032-2BP30-0AA0">https://support.industry.siemens.com/cs/ww/en/ps/3SU1032-2BP30-0AA0</a></p> <p>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)<br/> <a href="http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1032-2BP30-0AA0&amp;lang=en">http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1032-2BP30-0AA0&amp;lang=en</a></p> |

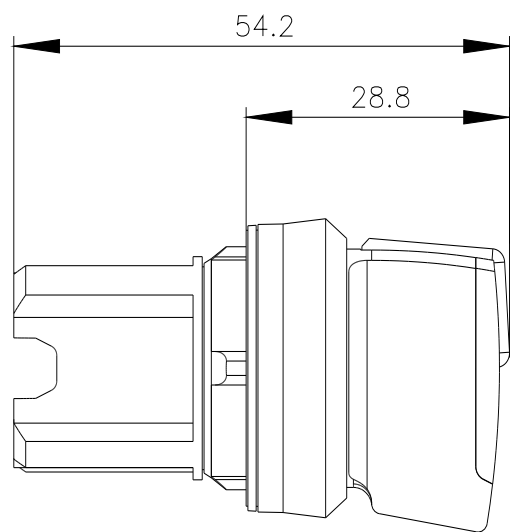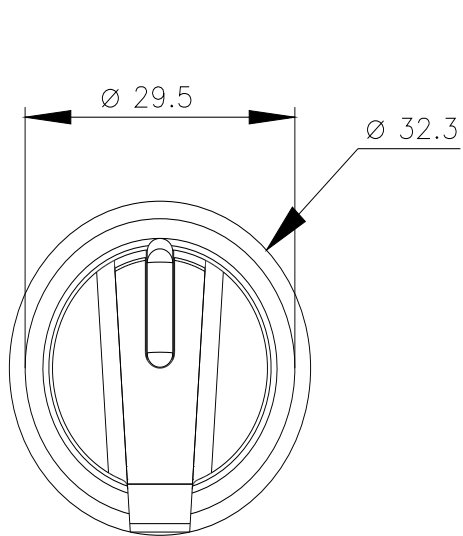

last modified:

1/26/2022 