## **SIEMENS**

## **Data sheet**



Key-operated switch BKS, 22 mm, round, metal, shiny, lock number S1, with 2 keys, 2 switch positions O-I, latching, actuating angle 90°, 10:30h/13:30h, Key removal O+I

product brand name	SIRIUS ACT
product designation	Key-operated switches
design of the product	Actuating/signaling element
product type designation	3SU1
product line	Metal, shiny, 22 mm
manufacturer's article number of included key	3SU1950-0FD80-0AA0
Actuator	
principle of operation of the actuating element	latching, 90° (10:30 h/13:30 h)
product extension optional light source	No
color	
of the actuating element	silver
material of the actuating element	metal
shape of the actuating element	Key
outer diameter of the actuating element	29.5 mm
number of switching positions	2
switch position for key distraction	
actuating angle	
• clockwise	90°
lock make	BCS
key number	S1
Front ring	
product component front ring	Yes
product component front ring design of the front ring	Yes Standard
design of the front ring	Standard
design of the front ring material of the front ring	Standard Metal, high gloss
design of the front ring material of the front ring color of the front ring	Standard Metal, high gloss
design of the front ring material of the front ring color of the front ring General technical data	Standard Metal, high gloss silver
design of the front ring material of the front ring color of the front ring General technical data protection class IP	Standard Metal, high gloss silver  IP66, IP67, IP69(IP69K)
design of the front ring material of the front ring color of the front ring General technical data protection class IP  • of the terminal	Standard Metal, high gloss silver  IP66, IP67, IP69(IP69K) IP20
design of the front ring material of the front ring color of the front ring General technical data protection class IP  • of the terminal degree of protection NEMA rating	Standard Metal, high gloss silver  IP66, IP67, IP69(IP69K) IP20
design of the front ring material of the front ring color of the front ring General technical data protection class IP  • of the terminal degree of protection NEMA rating shock resistance	Standard  Metal, high gloss silver  IP66, IP67, IP69(IP69K) IP20 1, 2, 3, 3R, 4, 4X, 12, 13
design of the front ring material of the front ring color of the front ring General technical data protection class IP	Standard  Metal, high gloss silver  IP66, IP67, IP69(IP69K) IP20 1, 2, 3, 3R, 4, 4X, 12, 13
design of the front ring material of the front ring color of the front ring General technical data protection class IP	Standard  Metal, high gloss silver  IP66, IP67, IP69(IP69K) IP20  1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms
design of the front ring material of the front ring color of the front ring General technical data protection class IP	Standard  Metal, high gloss silver  IP66, IP67, IP69(IP69K) IP20 1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms  10 500 Hz: 5g
design of the front ring material of the front ring color of the front ring General technical data protection class IP	Standard Metal, high gloss silver  IP66, IP67, IP69(IP69K) IP20 1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms  10 500 Hz: 5g 1 800 1/h
design of the front ring material of the front ring color of the front ring  General technical data protection class IP	Standard Metal, high gloss silver  IP66, IP67, IP69(IP69K) IP20 1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms  10 500 Hz: 5g 1 800 1/h 300 000
design of the front ring material of the front ring color of the front ring General technical data  protection class IP	Standard Metal, high gloss silver  IP66, IP67, IP69(IP69K) IP20 1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms  10 500 Hz: 5g 1 800 1/h 300 000 S
design of the front ring material of the front ring color of the front ring General technical data  protection class IP	Standard Metal, high gloss silver  IP66, IP67, IP69(IP69K) IP20 1, 2, 3, 3R, 4, 4X, 12, 13  sinusoidal half-wave 15g / 11 ms  10 500 Hz: 5g 1 800 1/h 300 000 S

during storage	-40 +80 °C
environmental category during operation according to IEC 60721	3M6, 3S2, 3B2, 3C3, 3K6 (with relative air humidity of 10 95%)
Installation/ mounting/ dimensions	
height	29.5 mm
width	29.5 mm
shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	56.3 mm
installation width	29.5 mm
installation depth	25.4 mm
Certificates/ approvals	

Certificates/ approvais

General Product Approval

**Declaration of Conformity** 



Confirmation









**Test Certificates** 

Marine / Shipping

Special Test Certificate

Type Test Certificates/Test Report









other Environment

<u>Confirmation</u> <u>Environmental Confirmations</u>

## Further information

Siemens has decided to exit the Russian market (see here).

 $\underline{\text{https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business}}$ 

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1050-5PF11-0AA0

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1050-5PF11-0AA0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1050-5PF11-0AA0

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$ 

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SU1050-5PF11-0AA0&lang=en

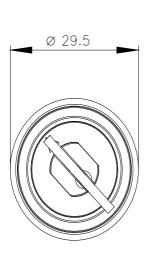

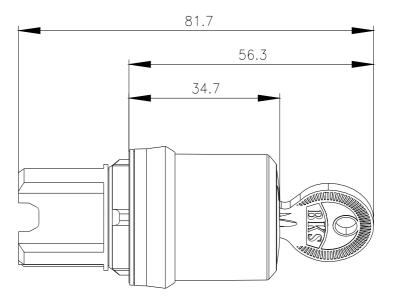

last modified: 1/26/2022 🖸