SIEMENS

Data sheet



Twin pushbutton, 22 mm, round, plastic with metal front ring, white, white, Pushbuttons, flat, Z=50-unit packaging

product brand name	SIRIUS ACT
product designation	Twin pushbuttons
design of the product	Actuating/signaling element
product type designation	3SU1
product line	Plastic with metal front ring, matt, 22 mm
Enclosure	3,, ==
number of command points	1
Actuator	
design of the actuating element	Flat buttons
principle of operation of the actuating element	momentary contact type
product extension optional	monoritary contact type
• light source	No
• contact module	Yes
color of the actuating element	white / white
material of the actuating element	plastic
shape of the actuating element	oval
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	Metal, matt
color of the front ring	sand gray
General technical data	
protection class IP	IP66, IP67, IP69(IP69K)
protection class IP degree of protection NEMA rating	IP66, IP67, IP69(IP69K) 1, 2, 3, 3R, 4, 4X, 12, 13
·	
degree of protection NEMA rating	
degree of protection NEMA rating shock resistance	1, 2, 3, 3R, 4, 4X, 12, 13
degree of protection NEMA rating shock resistance • according to IEC 60068-2-27	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms
shock resistance • according to IEC 60068-2-27 • for railway applications according to EN 61373	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms
degree of protection NEMA rating shock resistance	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B
degree of protection NEMA rating shock resistance	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g
degree of protection NEMA rating shock resistance	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B
degree of protection NEMA rating shock resistance	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h
degree of protection NEMA rating shock resistance	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 2 000 000
degree of protection NEMA rating shock resistance	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 2 000 000 S
degree of protection NEMA rating shock resistance	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 2 000 000 S
degree of protection NEMA rating shock resistance	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 2 000 000 S
degree of protection NEMA rating shock resistance	1, 2, 3, 3R, 4, 4X, 12, 13 sinusoidal half-wave 15g / 11 ms Category 1, Class B 10 500 Hz: 5g Category 1, Class B 3 600 1/h 2 000 000 S 10/01/2014

Installation/ mounting/ dimensions	
height	57.9 mm
width	29.9 mm
shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	14.4 mm
installation width	29.9 mm
installation depth	25.7 mm
Certificates/ approvals	

Further information

Siemens has decided to exit the Russian market (see here).

ens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1030-3AB66-0AA0-Z X90


Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3SU1030-3AB66-0AA0-Z~X90}$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1030-3AB66-0AA0-Z X90

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1030-3AB66-0AA0-Z X90&lang=en

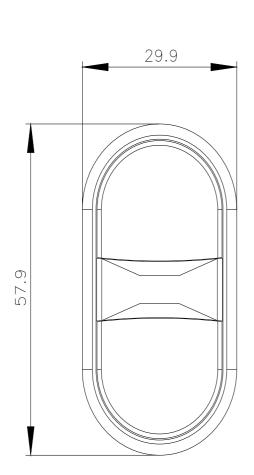

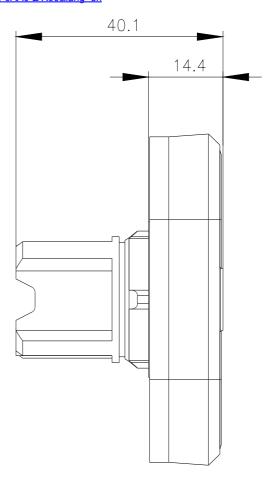

last modified:

1/26/2022